



BOSCH



ONE BATTERY FITS ALL.

Professional 18V Cordless Power Tools

Power Tools Catalog July 2024

PROFESSIONAL
18V
SYSTEM

THE CHOICE IS YOURS

We give you 3 easy ways to build your dream team.



COMBINE AS YOU NEED

CHOOSE BATTERIES
AND CHARGER



CHOOSE
SOLO TOOL



- Buy only what you need.
- Already got batteries?
Expand your kits with bare tools.

OR CHOOSE A KIT



- Most tools are available as kits.
- Comes with 1x tool, 1x charger,
2x batteries in one L-BOXX. *

OR CHOOSE A COMBO KIT



- The complete pro solution.
- Comes with multiple tools, batteries,
charger(s) in a carrying bag or case.
- Discover more on [bosch-pt.com.my](https://www.bosch-pt.com.my)

*The contents of the kit may vary due to changes in product combinations and the assortment offered.

up to **1,000W**¹

GBA 18V



5.0Ah

POWER ●●○○○

RUNTIME ●●○○○

CHARGING 80% in 16 min.³

AVAILABLE IN:



2.0Ah

4.0Ah

5.0Ah

Pro **CORE** 18V



12.0Ah

POWER ●●●●●

RUNTIME ●●●●●

CHARGING 80% in 36 min.³

AVAILABLE IN:



4.0Ah

8.0Ah

12.0Ah

up to **2,000W**²

PRO **CORE** 18V+



NEW

UP TO 71%* LONGER RUNTIME

FOR HEAVY-DUTY APPLICATIONS THANKS TO THE HIGHLY INNOVATIVE TABLESS CELL TECHNOLOGY

EXTENDED BATTERY LIFETIME**

THANKS TO OUTSTANDING HEAT MANAGEMENT WITH COOLPACK 2.0 AND THE TABLESS CELL TECHNOLOGY

8.0Ah

POWER ●●●●●

RUNTIME ●●●●○

CHARGING 80% in 32 min.³

¹Battery with cordless tool provides up to 1,000W of equivalent corded power. ²Battery with cordless tool provides up to 2,000W of equivalent corded power.

³Based on the world's fastest charger GAL 18V-160 C.

PROFESSIONAL
18V
SYSTEM




THE FIRST 18V BATTERY WITH TABLESS DESIGN.

The new ProCORE18V+ 8.0Ah

28%¹/50%²

Lower inner resistance



36%³

Less battery heating @ 90A
(~1500W output power)



Up to **71%⁴**

longer runtime

PRO CORE18V+
BITURBO



- Next generation of high-performance batteries based on tabless cell technology.
- More runtime and maximum power for all BITURBO tools
Up to 71% longer runtime for heavy-duty applications(vs ProCORE 8.0 Ah).
- Longer Lifetime thanks to outstanding heat management with COOLPACK 2.0 and the tabless cell technology.



- **Concrete:** ProCORE18V+ 8.0Ah vs. ProCORE18V 8.0Ah. Tested with GBH 18V-45 C: dia. 25 mm drilling in concrete C30/37, drill bit 8X dia. 25x400 mm; 150 mm holes; 30s drilling, 30s break.
- **Metal:** ProCORE18V+ 8.0Ah vs. ProCORE18V 8.0Ah. Tested with GWX 18V-15 5G: Grinding with a Bosch flap disk (2608619209) at 30-second intervals with a 5-second break in between. Application on a 200x10 steel plate (mild steel).
- **Wood:** ProCORE18V+ 8.0Ah vs. ProCORE18V 8.0Ah. Tested with GCM 18V-305 GDC: Cutting a Spruce wood: 100x100mm (no breaks). Cutting disc: Expert for Wood, 305 x 2,2/1,6 x 30 mm, 60 Teeth (2 608 644 528)

COMPATIBLE SINCE 2008:

all of our batteries are compatible with new and existing Bosch Professional tools in the same voltage class.

¹On battery pack level; ² On cell level. ³On cell level. ⁴ProCORE18V+ 8.0Ah vs ProCORE18V 8.0Ah with 90A current output for 2.4min (then ProCORE18V temperature limit is reached).
⁵ProCORE18V+ 8.0Ah vs ProCORE18V 8.0Ah. Tested with GBH 18V-45 C: Ø25mm drilling in concrete C30/37; Drill bit 8X Ø25x400mm; 150mm holes; 30s drilling, 30s break.



BOOST CORDED POWER FROM THE FIRST 18V BATTERY WITH TABLESS DESIGN.

Introducing the next generation of high-performance batteries featuring tabless cell technology, delivering more runtime and maximum power for all BITURBO tools.



BITURBO
BRUSHLESS

BITURBO BRUSHLESS TOOLS

- Revolutionary tabless cell technology ensures a longer runtime and maximum power for your BITURBO tools.
- High-performance brushless motors: Using the world's strongest commercially available magnets, the motor exploits the full potential of ProCore18V+ batteries for up to 2,000W of equivalent corded power.
- Comfort first: Outstanding power-to-weight ratio and ergonomic design make the extreme power of BITURBO tools lighter and easier to handle.
- High user-protection: Equipped with intelligent features to lower the risk of common injuries and put you in ultimate control: e.g. KickBack Control, Drop Control, Vibration Control

For maximum power of BITURBO tools, use ProCore18V+ 8.0Ah

PRO CORE18V+

PROFESSIONAL
18V
SYSTEM

READY FOR OUTDOORS: PROFESSIONAL 18V SYSTEM

Your job. Your turf. It's time to grow your Professional 18V System - with our new suite of high-performance and high comfort outdoor tools.

Bosch Professional

GBL 18V-750
GRT 18V-33
GFR 18V-23
GHE 18V-60

PROFESSIONAL
18V
SYSTEM



**CORDLESS BITURBO
BLOWER
GBL 18V-750**

- 1 STRONG PERFORMANCE**
Brushless motor and axial fan deliver strong-performance, heavier-duty debris movement
- 2 FULL CONTROL**
Select optimal power, noise level and runtime depending on the task
- 3 ERGONOMIC**
No-strain working thanks to lightweight and well-balanced design

CHOOSE 18V BATTERY FOR THE MOST EFFICIENT POWER OUTPUT!

Interchangeable battery system since 2008

COMPACT

PERFORMANCE

ENDURANCE

2.0Ah



4.0Ah

Pro **CORE** 18V



4.0Ah



5.0Ah



5.5Ah

Pro **CORE** 18V



*Not available in Malaysia

8.0Ah

Pro **CORE** 18V



8.0Ah

CORE18V+



12.0Ah

Pro **CORE** 18V



DRILL DRIVERS/IMPACT DRILL (GSR/GSB)



IMPACT DRIVERS/WRENCH (GDS/GDX/GDR)



ROTARY HAMMER (GBH < 2.0 J)



ROTARY HAMMER (GBH 2.0 - 4.0 J)



SABRE SAW (GSA < 25MM STROKE LENGTHS)



SABRE SAW (GSA < 25MM STROKE LENGTHS)



CIRCULAR SAW (GKS/GKM/GKT)



VACUUM (GAS > 1L)



STRAIGHT GRINDER (GGS)



ORBITAL SANDER (GSS)



PLANER (GHO)



MULTI-CUTTER (GOP) & SHEARS (GSC)



ANGLE GRINDER (GWS)



VACUUM (GAS < 1L) & BLOWER (GBL)



TABLE SAW



WORK LIGHT (GLI) & RADIO (GML)



ROTARY HAMMER



JIGSAW (GST) & BAND SAW (GCB)



MITRE SAW



PRO GARDEN TOOLS (GFR)



MANY BRANDS. MANY TOOLS. ONE BATTERY SYSTEM.

AMPShare is the shared battery system that lets you run many tools from many pro brands on just one battery.



Powered by
BOSCH

GLF 18V-8 Solo** (0 601 6C6 0L0)

Smooth Routing Made Easier

NEW!

WHY THIS

- 01 **Smooth routing with sufficient power**
 - Brushless motor
 - Constant speed
- 02 **Smooth routing with safety**
 - Cooling ventilation
 - Drop protection
- 03 **Smooth routing with ease**
 - Durable clamp system
 - Smooth cog wheel system
 - Increased visibility with LED and transparent base

Sufficient routing efficiency ^{SP}

- Smooth, efficient routing, thanks to the powerful brushless motor
- Stable cutting speed is ensured by the Constant Speed function

Stay safe when tool drops ^{SP}

With Drop Protection function

Easier to adjust depth

With cog wheel system

Quick stop when off

Thanks to the motor brake function stops the bit quickly < 2 seconds

Good holding experience ^{SP}

- The tool doesn't heat up easily thanks to the Cooling Ventilation design with optimized airflow
- Gripping for easy handling

Increased visibility of cutting area

Thanks to LED light and transparent base plate

Clamp lasts longer

Thanks to improved system and metal sleeve



TARGET USERS

- Cabinet installers & Carpenters
- Furniture / wood-based serial production



GLF 18V-8 Solo**	Unit	Specifications
Battery voltage	V	18
EC or DC	-	EC
No-load speed	rpm	10,000 - 30,000
Collet size	mm	6, 1/4", 8
Drop protection	-	Yes
Variable speed	-	Yes
Constant speed	-	Yes
LED	-	Yes
Dust extractor	-	Yes

70 pts

GDS 18V-350 Solo** / Kit (0 601 9M5 0L0 / 0 601 9M5 0L1)

Small size. Big impact. The cordless impact wrench for PRO bolting

NEW!

WHY THIS

- 01 **High output torque**
Max.350NM tightening torque. Tackling bolts up to M18.
- 02 **Compact Size**
With 131mm head length easy handling and working in tight spaces
- 03 **3-Speed selections+ ABR**
3 speed selections for tackling different bolt sizes

High output torque ^{SP}

Max.350NM tightening torque. Tackling bolts up to M18.

Compact Size ^{USP}

With 131mm head length easy handling and working in tight spaces

3-Speed selections+ ABR ^{SP}

3 speed selections for tackling different bolt sizes

Brushless motor

With the brushless motor from Bosch

Light weight


Baretool weight up to 1.1kg, avoiding soreness on wrist and save more efforts.



TARGET USERS

Users who need to perform fixing application with bolts up to M18, in HVAC, foundation and structure or auto repair.

50 / 120 pts



GDS 18V-350 Solo** / Kit	Unit	Specifications
Voltage	V	18
Motor type	-	Brushless
Anvil type	-	1/2" Friction ring plus in hole
Max torque (fwd)	Nm	350
Breakaway torque	-	To be tested
No-load speed	rpm	0 - 2,300
Impact rate	bpm	0 - 3,100
Modes	-	3 Speed setting + ABR
Head length	mm	131
Weight (bare tool)	kg	1.1
Weight (with 4.0Ah pack)	kg	1.7
Bolts size	-	Max. M18

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planer, Sander, Polisher, Hot Air Gun, Rubber, Cle Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

18 V Li-Ion Bosch Professional

GSR 185-LI
Cordless Drill /Driver
(0 601 9K3 0L2)



70 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 162 mm
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Torque (Hard/Soft)	: 50 / 21 Nm
Max. Screw Diameter	: 10mm
Max. Drilling (Wood/Metal)	: 35 / 10 mm
Chuck Material	: Metal
Weight	: 1.3 kg

GSB 185-LI
Cordless Impact Drill
(0 601 9K3 1L2)



80 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 177 mm
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Torque (Hard/Soft)	: 50 / 21 Nm
Max. Screw Diameter	: 10mm
Max. Drilling (Wood/Metal/Masonry)	: 35 / 10 / 10 mm
Chuck Material	: Metal
Weight	: 1.3 kg

GSB 180-LI
Cordless Impact Drill
(0 601 9F8 3L2)



80 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Impact Rate	: 27,000 bpm
Torque (Hard/Soft)	: 54 / 21 Nm
Max. Screw Diameter	: 10 mm
Max. Drilling (Wood/Metal/Masonry)	: 35 / 10 / 10 mm
Chuck Size	: 13 mm
Weight	: 1.4 kg

GSB 183-LI
Cordless Impact Drill
(0 601 9K9 1L1)



60 pts

Capacity	
Battery Voltage	: 18 V
Impact Force	: 0 - 24,000 bpm
No-load Speed	: 0-440/1,650 rpm
Max. Torque (Hard/Soft)	: 56 / 21 Nm
Head Length	: 207 mm
Max. Screw Diameter	: 10 mm
Max Drilling (Wood/Metal/Masonry)	: 35/10/10 mm
Chuck Material	: Metal
Weight (w/2.0Ah)	: 1.6 kg

GDR 180-LI Solo**
Cordless Impact Driver
(0 601 9G5 1C0)



40 pts

Capacity	
Battery Voltage	: 18 V
Impact Force	: 0 - 3,600 bpm
No-load Speed	: 0 - 2,800 rpm
Max. Torque	: 160 Nm
Head Length	: 150 mm
Dim. Length/Height	: 153/234 mm
Bit Holder/Shank	: 1/4" Hex
Weight (w/2.0Ah)	: 1.4 kg

GBH 180-LI
Cordless Hammer
(0 611 911 1L2)



180 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Impact Force	: 2.0 J
Drilling Capacity	: 20mm
No-load Speed	: 0 - 1,800 rpm
Impact rate	: 0 - 5,100 bpm
Charger	: GAL 18 V-40 CV
Charging Time	: 60 mins
Weight (bare tool)	: 2.3 kg

GBH 185-LI
Cordless Hammer
(0 611 924 0L1)



200 pts

Capacity	
Battery Voltage	: 18 V
Impact Force	: 1.9 J
Drilling Ø in concrete	: 4 - 22 mm
No-load Speed	: 0 - 1,050 rpm
Impact rate	: 0 - 4,675 bpm
Charger	: GBA 18V ≥4.0 Ah
Working LED	: Yes
Weight (bare tool)	: 2.3 kg

GBH 187-LI One Chuck
Cordless Hammer
(0 611 923 1L0)



200 pts

Capacity	
Battery Voltage	: 18 V
Impact Force	: 2.4 J
Drilling Ø in concrete	
/Steel / wood	: 24/13/30mm
No-load Speed	: 0 - 980 rpm
Impact rate	: 0 - 4,350 bpm
Charger	: GBA 4.0/5.0/6.0 Ah ProCORE 8.0/12.0 A
Working LED	: Yes
Weight (bare tool)	: 2.3 kg

GWS 180-LI
Cordless Angle Grinder
(0 601 9H9 0L1)



180 pts

Capacity	
Battery Voltage	: 18 V
Spindle	: M10
No-load Speed	: 11,000 rpm
Disc size	: 100 mm
Weight (bare tool)	: 1.4 kg

GDX 180-LI
Cordless Impact Wrench / Driver
(0 601 9G5 2L0)



100 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max Torque	: 180 Nm
Head Length	: 170 mm
Dimensions	
Length/Height	: 171 / 234 mm
Motor	: DC
Bit Holder/Shank	: 1/4" Hex; 1/2" Square
LED light	: Yes - above trigger

GDS 250-LI
Cordless Impact Wrench
(0 601 9G6 1L0)



120 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Charger	: GAL 18 V-40 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

GLI 180-LI Solo**
Cordless Jobsite Light
(0 601 4A1 1L0)



20 pts

Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Ont
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

GST 183-LI Solo**
Cordless Jigsaw
(0 601 5B7 0L0)



60 pts

Capacity	
Battery Voltage	: 18 V
Stroke rate Bow Handle	: 0 - 3,300 spm
Stroke Length	: 20 mm
Max Cutting Depth	
In Wood	: 95 mm
In Aluminium	: 15 mm
In Metal	: 8 mm
Max Cutting Angle	: 45°
Weight	: 1.6 kg

GST 185-LI Solo**
Cordless Jigsaw
(0 601 5B3 0L3)



100 pts

Capacity	
Battery Voltage	: 18 V
Stroke rate Bow Handle	: 0 - 3,500 spm
Stroke Length	: 26 mm
Cutting Depth	: 125 mm
Bladeholder	: SDS
Bevel Angle	: -45 - 45°
Weight incl. 4.0 battery	: 2.6 kg

GKS 185-LI Solo**
Cordless Circular Saw
(0 601 6C1 2L1)



120 pts

Capacity	
Battery Voltage	: 18 V
Blade size / Bore size	: 165 / 20 mm
No-load Speed	: 5,000 rpm
Cutting depth. 0° / 45°	: 57 / 41 mm
Bevel Capacity Max.	: 50°
LED Work area illumination	: Yes
Weight solo	: 2.8 kg

GKS 18V-44 Solo (125mm)**
Cordless Circular Saw
(0 601 9M3 0L0)



80 pts

Capacity	
Battery Voltage	: 18 V
Motor type	: EC
No-load Speed	: 6,400 min ⁻¹
Cutting depth. 0° / 45°	: 44 / 30 mm
Bevel Capacity Max.	: 45°
Saw Blade Diameter	: 125mm
Bore Size	: 20 mm
Weight solo	: 2.0 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GEX 185-LI Solo**
Random Orbit Sander
(0 601 3A5 080)



Capacity	
Battery Voltage	: 18 V
Motor type	: EC
No-load Speed	: 6,000 - 10,000 rpm/min
Sanding Sheet Diameter	: 125 mm
Sanding Stroke	: 2.5 mm
Vibration	: 2.2 m/s2
Weight (bare tool)	: 0.93 kg

GTB 185-LI Solo**
Cordless Drywall Screwdriver
(0 601 9K7 0L1)



Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0 - 4,500 rpm/min
Max Size	: Ø6 self drilling
Soft Torque	: 5.2 Nm
Weight w/o battery	: 0.95 kg

GMA 55
Attachment of GTB 185
(1 600 A02 5GJ)



Capacity	
Screw Diameter Max.	: 5 mm
Accepted Screw Length	: 25 - 55 mm
Accepted Belt Width	: 15.7 - 16 mm
Weight	: 0.36 kg
Length x Height x Width	: 201 x 121 x 62.5 mm

GSA 185-LI Solo**
Cordless Reciprocating Saw
(0 601 6C0 0L1)



Capacity	
Battery Voltage	: 18 V
No-load Stroke rate	: 0 - 2,900min ⁻¹
Stroke Length	: 28 mm
Weight w/o battery	: 3.2 kg
Cutting Depth	
-Wood	: 230 mm
-Metal profile & Pipes	: 150 mm

GOP 185-LI Solo**
Cordless Multi-Cutter
(0 601 8G2 080)



Capacity	
Battery Voltage	: 18 V
Motor type	: Brushless
No-load Speed	: 10,000 - 20,000 rpm
Oscillating Angle(degree)	: 3.4
Starlock Type	: StarLock Plus
Quick Change	: SDS Snap in
Vibration plunge cut wood	: 3.4 m/s2
Weight w/o battery	: 1.2 kg

GHO 185-LI Solo**
CORDLESS PLANER
(0 601 5B5 080)



Capacity	
Battery Voltage	: 18 V
Motor type	: Brushless
No-load Speed	: 14,000 rpm
Planing Deep	: 0 - 2.6 mm
Planing Width	: 82 mm
Rebating Depth	: 0 - 9 mm



GDR 18V-220 C Solo / Kit** (0 601 9L6 0L0 / 0 601 9L6 0L2) **NEW!**
Full control for top screwdriving quality across various application

WHY THIS

- 01** A new milestone in power-dense motors
Ensures faster work progress and a shorter head length than its predecessor
- 02** Simplistic handling for maximized user convenience
With one-handed bit insertion and two LED lights + new User Interface Lock feature
- 03** Excellent tool control allows superior user protection and increased health
With three-speed/torque settings and adjustable screw modes

More convenience when changing bits ^{SP}
Designed for single-handed bit insertion

Superior visibility ^{SP}
Two LED lights, in foot and head, and can be turned ON/OFF for controlled illumination

Quality finishing ^{USP}
Adjustable screw modes with A/B modes and three speed setting



Extreme screwdriving power
Max. torque of 220 Nm and 3,400 RPM

Reaches into the tightest spaces
Compact design with 113 mm head length

HEAVY DUTY

TARGET USERS

- Cabinet Installer
- HVAC
- Roofer & Framer
- Metal Installation



GDR 18V-220 C Solo** / Kit	Unit	Specifications
Platform	-	18V Brushless
Max. torque	Nm	220
No-load speed	rpm	0-1,100 / 2,300 / 3,400
Impact rate	bpm	0-2,200 / 3,300 / 4,000
Head length	mm	113
Weight w/o battery	kg	1.0
Speed Selection	-	3

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planer, Sander, Polisher, Hot Air Gun, Router, Cle Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

18 V Li-Ion Bosch Heavy Duty

GSR 18V-60 FC Solo**
Cordless Drill / Driver
(0 601 9G7 1L0)

HEAVY DUTY



Due to BitClick System
*Optional accessories

150 pts

Capacity	
Battery Capacity	: 18 V
Drilling Dia.: In Steel	: 13mm
In Wood	: 38 mm
Max.Torque(hard/soft)	: 60 / 31 Nm
No-load speed	: 0 - 6000 / 1,900 rpm
Weight	: 0.9 kg

GSR/GSB 18V-90 C Solo**
Cordless Drill/Driver
(0 601 9K6 0L0 / 0 601 9K6 1L0)

HEAVY DUTY



90 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 163 / 175 mm
No-load Speed	: 0-630/2,100rpm
Max Torque (Hard/Soft)	: 64 / 36 Nm
Max Screw Diameter	: 12 mm
Max Drilling	: 68 mm
Weight	: 1.10 kg

GSR 18V-90 FC Solo**
Cordless Drill/Driver
(0 601 9K6 2L0)

HEAVY DUTY



220 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 136 mm
No-load Speed	: 0-630/2,100rpm
Max Torque (Hard/Soft)	: 64 / 36 Nm
Max Screw Diameter	: 12 mm
Max Drilling (Wood/Metal)	: 68 / 13 mm
Weight (net/gross)	: 0.94 / 1.15 kg

GWS 18V-10 Solo**
Cordless Angle Grinder
(0 601 9J4 0K0)

HEAVY DUTY



100 pts

Capacity	
Battery Voltage	: 18 V
No-Load Speed	: 9000 rpm
Max Output Power	: Equivalent to 1000W corded tool (w/PRoCORE)
Grip Circumference	: 155mm
Disc	: 100mm (M10)
Weight	: 2KG (Tool only)
Charger	: GAL 1880 CV
Charging Time	: 65 mins

GWS 18V-10 P Solo**
Cordless Angle Grinder
(0 601 9J4 1K0)

HEAVY DUTY



100 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 9,000 rpm
Disc Diameter	: 100 mm
Spindle Dize	: M10 & M 14
Grip Size	: 160 mm
Weight w/o battery	: 1.8 / 1.9 kg

GGG 18V-20 Solo**
Cordless Straight Grinder
(0 601 9B5 401)

HEAVY DUTY



160 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 24,000 rpm
Tool Holder	: Collet
Weight w/o battery	: 1.2 kg

GDX 18V-200 C
Cordless Impact Wrench / Driver
(0 601 9G4 2L0)

HEAVY DUTY



200 pts

Capacity	
Battery Voltage	: 18 V / 4.0Ah
Max. Torque	: 200 Nm
No-load Speed	: 1- 1,100/2,300/3,400 rpm
Impact Rate	: 0- 2,300/3,400/4,200 rpm
Head Length	: 147 mm
Weight (w/o battery)	: 1.17 kg
Bit Holder/Square Drive	: 1/4" Hex 1/2" Square
Charger	: GAL 18V-40CV
Charging Time	: 60 mins

GDS 18V-400
Cordless Impact Wrench
(0 601 9K0 0L0)

HEAVY DUTY



180 pts

Capacity	
Battery Voltage	: 18 V
Max. Torque	: 400 Nm
No load Speed	: 0 - 2,500rpm
Impact Rate	: 0 - 3,700 bpm
Head Length	: 172 mm
Weight (w/o battery)	: 1.25 kg
Weight	(w GBA 18V 5.0Ah) : 1.85 kg

GLI 18V-800 Solo**
Cordless Light
(0 601 443 600)

HEAVY DUTY



30 pts

Capacity	
Weight w/o battery	: 0.5 kg
Luminous flux	: 800 lm
Number of brightness level	: 3
Packaging dimension (width x length x height)	: 110x164x81mm



GLI 18V-1900 Solo**
Cordless Light
(0 601 446 400)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 18 V
Max. Brightness	: 1900 lm
Dimensions	: 292 x 187 x 69 mm
Runtime	: 100 min / Ah
Weight	: 1.6kg

GSA 18V-LI C Solo**
Cordless Sabre Saw
(0 601 6A5 080)

HEAVY DUTY



80 pts

Capacity	
Battery Voltage	: 18 V
Stroke Length	: 21 mm
No load Stroke Rate	: 0- 3,050 spm
Cutting Dept In Wood	: 200 mm
in Metal	: 100 mm

GSA 18V-32 Solo**
Cordless Sabre Saw
(0 601 6A8 108)

HEAVY DUTY



200 pts

Capacity	
Battery Voltage	: 18 V
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
in Metal	: 175 mm
Weight	: 3.5 kg

GST 18V-LI B Solo**
Cordless Jigsaw
(0 601 5A6 100)

HEAVY DUTY



120 pts

Capacity	
Battery Voltage	: 18 V
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

GST 18V-155 BC Solo**
Cordless Jigsaw
(0 601 5B1 001)

HEAVY DUTY



190 pts

Capacity	
Battery Voltage	: 18 V
Stroke Rate No-load	: 0 - 3,800 spm
Stroke Height	: 26 mm
Packaging dimension (widthxlengthxheight)	: 360x440x155 mm
Weight w/o battery	: 2 kg

GKS 18V-57 Solo**
Cordless Circular Saw
(0 601 6A2 2L0)

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°	: 57 mm
at 45°	: 39 mm
Weight	: 4.1 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GAS 18V-1 Solo**
Cordless Vacuum Cleaner
(0 601 9C6 2L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min / Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

GAS 18V-10L Premium Solo**
Cordless Vacuum Cleaner
(0 601 9C6 3K0)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 18 V
Max. Vacuum	: 90 mbar
Max. Airflow	: 24 l/sec
Max. Runtime with 6.0 Ah Battery	: 24 min
Dust Class (EU Standard): Lclass	
Container Vol./Gross/net:	10/6 litre/gallons
Weight	: 4.6 kg

GBL 18V-120 Solo**
Cordless Blower
(0 601 9F5 1L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah Speed II: 5 min / Ah
Weight without Cable:	1.1 kg

GSS 18V-LI Solo**
Cordless Orbital Sander
(0 601 9D0 2L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11,000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GSS 18V-13 Solo**
Cordless Orbital Sander
(0 601 9L0 100)

HEAVY DUTY



100 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 6,000 - 10,000 rpm
Orbit Diameter	: 1.6 mm
Delta Sanding Plate w/hook-and loop (L/W)	: 150 / 100 mm
Sanding Plate w/hook-and-loop & clamp (L/W)	: 100 / 110 mm
Weight w/o battery	: 1.1 kg

GEX 18V-125 Solo**
Cordless Random Orbital Sander
(0 601 372 201)

HEAVY DUTY



80 pts

Capacity	
Battery Voltage	: 18 V
Sanding Pad Diameter	: 125 mm
No-load Speed	: 6,000 - 10,000 rpm
Orbit Stroke Rate	: 12,000 - 20,000 rpm
Eccentricity	: 1.25mm
Orbit Diameter	: 2.5 mm
Weight w/o battery	: 1.1 kg



GCB 18V-63 Solo**
Cordless Band Saw
(0 601 2A0 400)

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
Cutting Capacity	: 63.5 x 63.5 mm
Saw Blade	
Dimensions	: 733 x 127 x 0.4 mm
No-load Speed	: 162 m/min
Weight without Battery:	3.3 kg

GBH 18V-26 Solo**
Cordless Rotary Hammer
(0 611 909 000)

HEAVY DUTY



160 pts

Capacity	
Battery Voltage	: 18 V
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 980 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

GBH 18V-28 CF Solo**
Cordless Rotary Hammer
(0 611 921 081)

HEAVY DUTY



260 pts

Capacity	
Battery Voltage	: 18 V
Impact Energy	: 3.3 J
No-load Speed	: 0 - 950 rpm
Impact Rate	: 0 - 4,220 bpm
Max Drilling Ø Concrete	: 28 mm
Weight w/o battery	: 3.4 kg



GDE 18V-16
Cordless Dust Extractor
(1 600 A00 51M)



Capacity	
Compatible with	: GBH 18V-26 only
Drilling Diameter	: Max. 16 mm
Max. Drilling	: 100 mm
Weight	: 1.2 kg

GRG 18V-16 C Solo**
Cordless Rivet Gun
(0 601 9K5 080)

HEAVY DUTY



430 pts

Capacity	
Battery Voltage	: 18 V
Motor	: Brushless
Pulling Force	: 16,000 N
Stroke Length	: 25 mm
Rivet Diameter	: 3.0 - 6.4 mm
Weight w/o Battery	: 1.6 kg

GHG 18V-50 Solo**
Cordless Heat Gun
(0 601 2A6 580)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 18 V
Heat up Time (up to 300°C)	: <6 sec
Temperature Lvl	: 2 (300/600°C)
Max. Airflow (in l/min)	: 175
Accessories	: Reduction nozzle, Reflection nozzle

GSC 18V-16 E Solo**
Cordless Metal Shear
(0 601 926 300)

HEAVY DUTY



260 pts

Capacity	
No-load Stroke Rate	: 3,200 rpm
Max. Sheet Cutting (Steel)	: 2.6 mm
Max. Sheet Cutting (Al)	: 2.2 mm
Smallest Curve Radius	: 2.0 mm
Dimension	: 285x148x84 mm
Weight w/o Battery	: 1.6 kg



* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



BOSCH

BITURBO BRUSHLESS

REVOLUTIONARY PERFORMANCE. FEEL THE EXTREME.



NEW STANDARDS IN PERFORMANCE WITH LESS WEIGHT AND MAXIMUM OOMPH

Maximum Power | Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.

Perfect handling | BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor Tools with two batteries.

Ultimate control | Multiple clever technologies make your work safer, faster and more efficient.

Fully compatible | Compatible with all new and existing Batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

New high-performance motor



Our most powerful battery ever

BITURBO Brushless: Up to 1,800 watts of corded power.

ENGINEERED FOR HIGHEST PERFORMANCE AMONGST 18V SYSTEM

The Professional 18V System combines highest performance with compact dimensions and minimum weight to make your toughest jobs easier. Benefit from the ultimate in performance, uncompromising compatibility and maximum freedom on your job site.

**+87%¹
MORE
POWER**

ProCORE18V: latest cell technology and intelligent battery management.



**Up to +135%²
LONGER
LIFETIME**

COOLPACK 2.0 technology: prevents the battery from overheating.

**Up to +151%³
EXTENDED
RUNTIME**

Excellent battery performance: When other batteries switch off, you just keep working.



**PERFECTLY
ENGINEERED FOR HIGHEST
PERFORMANCE.**

**9 min to 50%⁴
FASTEST
CHARGING**

Get back to work faster than ever thanks to the world charging champion GAL 18V-160 C Professional.





BOSCH

BITURBO BRUSHLESS

EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP

Connect BITURBO Tools with App for Maximum Efficiency & Customization




Compatible with iOS and Android



GCY 42 installed on tool for tool to connect to APP



Bosch ToolBox APP




Connected tools can be found in My Tools within Bosch Toolbox APP

World's First Levelling Function



GSR/B 18V-150 C

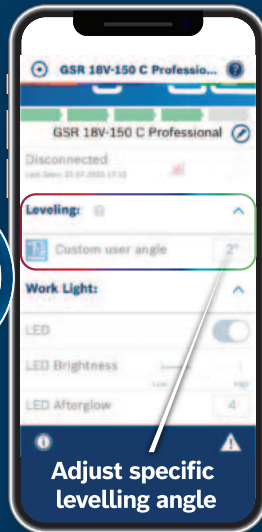


1



2



4




3


Personalized Speed Levels




GCM 18V-305 GDC

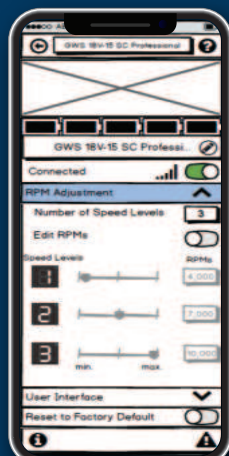

Default Setting

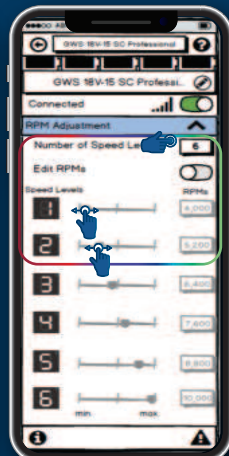

Personalized Setting

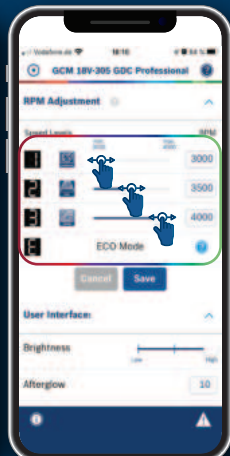

18 V BITURBO BRUSHLESS

GDS 18V-1000 (1/2") Solo
Cordless Impact Wrench
(0 601 9J8 3L1)**

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0-800/1,200/1,750 rpm
Max tightening torque	: 1,000 Nm
Max.Breakaway Torque	: 1,600 Nm
Impact Rate	: 0-1,600/2,400/2,600 bpm
Torque	: 0-350/700/1,000 Nm
Weight w/o battery	: 2.9 kg

GDS 18V-1050 H (3/4") Solo
Cordless Impact Wrench
(0 601 9J8 5L1)**

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0 - 1,750 rpm
Max.Torque	(1st/2nd/3rd level) : 350/750/1,050 Nm
Max.Breakaway Torque	: 1,700 Nm
Impact Rate	: 0 - 2,600 bpm

GDS 18V-1600 HC Solo
Cordless Impact Wrench
(0 601 9M1 080)**

HEAVY DUTY



220 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0-800/1,300/1,750 rpm
Impact Rate	: 0-1,550/2,200/2,300 bpm
Anvil Size	: 3/4"
Max. Tightening / Breakaway Torque	: 1,600/2,000 Nm
Speed /Power Setting	: 3
Weight w/o Battery	: 3.2 kg

GSR 18V-150C Solo
Cordless Drill/Driver
(0 601 9J5 0L0)**

HEAVY DUTY



140 pts

Capacity	
Battery Voltage	: 18 V
Torque (soft/hard/max.)	: 84/100/150Nm
No-load speed(1st gear)	: 0 - 550 rpm
(2nd gear)	: 0 - 2,200 rpm
Weight excl. battery	: 2.1 kg
Chuck capacity min/max	: 1.5 / 13 mm
Torque settings	: 25 + 1

GSB 18V-150C Solo
Cordless Combi
(0 601 9J5 1L0)**

HEAVY DUTY



150 pts

Capacity	
Battery Voltage	: 18 V
Torque (soft/hard/max.)	: 84/100/150Nm
No-load speed(1st gear)	: 0 - 550 rpm
(2nd gear)	: 0 - 2,200 rpm
Weight excl. battery	: 2.2 kg
Chuck capacity min/max	: 1.5 / 13 mm
Torque settings	: 25 + 2

GBH 18V-34 CF Solo
Cordless Rotary Hammer
(0 611 914 082)**

HEAVY DUTY



360 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to corded power	: 950 W
Max. impact energy	: 5.8 J
No-load speed	: 0 - 500 rpm
Impact rate	: 2,900 bpm
Weight with battery	: 5.9 kg

GBH 18V-36 C Solo
Cordless Rotary Hammer
(0 611 915 082)**

HEAVY DUTY



400 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to corded power	: 1,000 W
Max. impact energy	: 7.0 J
No-load speed	: 0 - 500 rpm
Impact rate	: 2,900 bpm
Weight with battery	: 6.1 kg

GBH 18V-45 C Solo
Cordless Rotary Hammer
(0 611 913 080)**

HEAVY DUTY



670 pts

Capacity	
Battery Voltage	: 18 W
Single impact energy	: 12.5 J
Impact rate drilling	: 2,720 bpm
Impact rate chiselling	: 2,760 bpm
Drilling diameter	: 12-45 mm
Rated Toll Speed	: 0 - 305 rpm
Weight with battery	: 9.3 kg

GKS 18V-68 GC Solo
Cordless Circular Saw
(0 601 6B5 180)**

HEAVY DUTY



240 pts

Capacity	
Battery Voltage	: 18 V
Battery	: ProCORE18V 8.0*
SB Diameter / Bore Size	: 190 mm / 20 mm
Cutting Capacity (90°)	: 68 mm
(45°)	: 50 mm
Bevel Capacity	: 0 - 50°
No-load Speed	: 2,500 - 5,000 rpm

GKS 18V-70 L Solo
Cordless Circular Saw
(0 601 6B9 000)**

NEW!

HEAVY DUTY



260 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 5,000 rpm
Saw Blade Diameter	: 190 mm
Saw Blade Bore Diameter	: 30 mm
Guide Rail Compatible	: No
Weight w/o Battery	: 4.1 kg

GTS 18V-216 Solo
Cordless Table Saw
(0 601 B44 0K0)**

HEAVY DUTY



380 pts

Capacity	
Voltage	: 18 V
Saw blade diameter	: 216 mm
Bore hole diameter	: 30 mm
Base blade thickness	: 2.0 / 1.4 mm
No-load Speed	: 4,500 rpm
Weight with battery	: 21.6 kg
Cutting height	: 70 mm
Cutting capacity	: 635mm

GCM 18V-216 D Solo
Cordless Mitre Saw
(0 601 B51 080)**

HEAVY DUTY



310 pts

Capacity	
Battery Voltage	: 18 V
No-load speed	: 5,000 rpm
Saw Blade diameter	: 216 mm
Saw Blade Teeth	: 24 mm
Cutting dept 0° Miter/0° Bevel:	: 66x305 mm
Miter Setting	: 48° / 48°
Bevel Setting	: 47° / 47°
Weight	: 12.5 kg

GCM 18V-254 D Solo
Cordless Mitre Saw
(0 601 B51 180)**

HEAVY DUTY



420 pts

Capacity	
Battery Voltage	: 18 V
No-load speed	: 4,500 rpm
Saw Blade diameter	: 254 mm
Saw Blade Teeth	: 40 mm
Cutting dept 0° Miter/0° Bevel:	: 90x305 mm
Miter Setting (L/R)	: 52° / 60°
Bevel Setting (L/R)	: 47° / 47°
Weight	: 17.0 kg

GCM 18V-305 GDC Solo
Cordless Mitre Saw
(0 601 B43 0K0)**

HEAVY DUTY



680 pts

Capacity	
Battery Voltage	: 18 V
Max. Cutting Depth	: 120 mm
Width	: 400 mm
Equivalent to	: 2,000 W
Disc diameter	: 305mm
No-load speed	: 2,550 - 4,000 rpm
Weight incl. battery	: 27.8 kg

GKT 18V-52 GC Solo
Cordless Plunge Saw
(0 601 6B4 000)**

NEW!

HEAVY DUTY



410 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 2,800 - 5,500 rpm
Saw Blade bore Diameter	: 20 mm
Saw Blade Diameter	: 140 mm
Baseplate	: 305 x 169 mm
Bevel Angle	: -1 - 47°
Weight w/o Battery	: 4.1 kg

GWS 18V-15 SC (100mm) Solo
Cordless Angle Grinder
(0 601 9H6 1B2)**

HEAVY DUTY



170 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored power:	: 1,500 W
Disc diameter	: 100 mm
No-load speed	: 9,800 rpm
Weight w/o battery	: 2.3 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GWS 18V-15 SC (125mm) Solo
Cordless Angle Grinder
(0 601 9H6 100)**



HEAVY DUTY

170 pts

Speed Selection	Accident Protection
Toolless	Vibration Control
Brushless Motor	1500 W Equivalent

Capacity

Battery Voltage	: 18 V
Equivalent to cored power	: 1,500 W
Disc diameter	: 125 mm
No-load speed	: 3,400 - 9,800 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-15 SC (150mm) Solo
Cordless Angle Grinder
(0 601 9H6 300)**



HEAVY DUTY

170 pts

Speed Selection	Accident Protection
Toolless	Vibration Control
Brushless Motor	1500 W Equivalent

Capacity

Battery Voltage	: 18 V
Equivalent to cored power	: 1,500 W
Disc diameter	: 150 mm
No-load speed	: 2,600 - 7,400 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-15 PSC Solo
Cordless Angle Grinder
(0 601 9H6 B00)**



HEAVY DUTY

190 pts

Speed Selection	Accident Protection
Toolless	Vibration Control
Brushless Motor	1500 W Equivalent

Capacity

Battery Voltage	: 18 V
Equivalent to cored power	: 1,500 W
Disc diameter	: 125 mm
No-load speed	: 3,400 - 9,800 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-180 PC Solo
Cordless Angle Grinder
(0 601 9H6 E01)**



HEAVY DUTY

190 pts

Speed Selection	Accident Protection
Toolless	Vibration Control
Brushless Motor	1500 W Equivalent

Capacity

Battery Voltage	: 18 V
Equivalent to cored input power	: 1,500 W
Equivalent to cored output power	: 1,130 W
Disc Size	: 180 mm
Spindle	: M14
No-load Speed	: 7,000 rpm
Weight w/o battery	: 2.8 kg
Cutting Depth	: 61 mm
Grip Circumference	: 156

GWS 18V-180 P Solo
Cordless Angle Grinder
(0 601 9H6 L01)**



HEAVY DUTY

190 pts

1500 W Equivalent	Vibration Control
-------------------	-------------------

Capacity

Battery Voltage	: 18V
No-load Speed	: 6,100 rpm
Grinding Spindle Thread	: M 14
Bore Size, Diameter	: 22.23 mm
Disc Diameter	: 180 mm
Speed Output no-load, nominal max.	: 7,000 rpm
Weight w/o Battery	: 2.8 kg

**GCY 42 Professional
(1 600 A01 L2W)**



Capacity

Reach	: 30 m
Output power	: <1 W

Guide Rail

Guiderrail compatible with GKS 18V-68 GC



**FSN KK (plastic cover)
(1 600 Z00 00C)**



**FSN KZW (clamps)
(1 600 A00 1F8)**



**FSN RS (kickback stop)
(1 600 Z00 00M)**



12 V Li-Ion Bosch Professional

**GSR 120-LI GEN 2
Cordless Drill / Driver
(0 601 9G8 0L0)**



Capacity

Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
Weight	: 0.97 kg

**GSB 120-LI GEN 2
Cordless Combi
(0 601 9G8 1L0)**



Capacity

Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
- in Masonry	: 8 mm
Weight	: 1.06 kg

**GDR 120 LI
Cordless Impact Driver
(0 601 9F0 0L6)**



Capacity

Battery Voltage	: 12 V / 2.0 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 0 - 1900/3200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

**Pro Pruner
Cordless Secateur
(0 601 9K1 0L1)**



Capacity

Battery Voltage	: 12 V
Battery Capacity	: 3.0 Ah
Max. Cutting Diameter	: 25 mm
Weight with 12 V / 3.0Ah Battery	: 1.0 kg
No. of Cuts per Charge	: 4,500

12 V Li-Ion Bosch Heavy Duty

**GSR 12V-30
Cordless Drill / Driver
(0 601 9G9 0L1)**



HEAVY DUTY

80 pts

Brushless Motor	Accident Protection
-----------------	---------------------

Capacity

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 20 mm
Max. Torque (hard/soft)	: 30 / 18 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Weight	: 0.82 kg

**GSB 12V-30
Cordless Impact Drill Driver
(0 601 9G9 1L1)**



HEAVY DUTY

90 pts

Brushless Motor	Accident Protection
-----------------	---------------------

Capacity

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10mm
In Wood	: 20 mm
In Masonry	: 8mm
Max. Torque (hard/soft)	: 30 / 18 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Weight	: 0.82 kg

**GDR 12V-EC
Cordless Impact Driver
(0 601 9E0 0L2)**



HEAVY DUTY

100 pts

Brushless Motor	
-----------------	--

Capacity

Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Weight	: 0.95 kg

**GSR 12V-15 FC
Cordless Screw / Drill Driver
(0 601 9F6 0L0)**



HEAVY DUTY

110 pts

Brushless Motor	
-----------------	--

Capacity

Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft)	: 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg (tool only)

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

GWS 12V-76 Solo**
Cordless Angle Grinder
(0 601 9F2 000)**HEAVY DUTY**

60 pts

Capacity	
No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GOP 12V-28 Solo**
Cordless Multi-Cutter
(0 601 8B5 0L0)**HEAVY DUTY**

70 pts

Capacity	
Oscillation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

GRO 12V-35 Solo**
Cordless Rotary Tool
(0 601 9C5 0K1)**HEAVY DUTY**

40 pts

Capacity	
Battery Voltage	: 12 V
Max. Collet Diameter	: 3.2mm
No-load speed	: 5,000 / 32,000 rpm
Weight	: 0.62 kg

GAS 12V-LI Solo**
Cordless Vacuum Cleaner
(0 601 9E3 081)**HEAVY DUTY**

30 pts

Capacity	
Battery Voltage	: 12 V
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

18V BITURBO

12V Cordless

GSA 12V-LI Solo**
Cordless Sabre Saw
(0 601 64L 9L2)**HEAVY DUTY**

60 pts

Capacity	
Battery Voltage	: 12 V
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Cutting depth in metal profiles & metal pipes	: 50 mm
Wood	: 65 mm

GST 12V-LI Solo**
Cordless Jigsaw
(0 601 5A1 0L1)**HEAVY DUTY**

60 pts

Capacity	
Battery Voltage	: 12 V
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

GKF 12V-8 Solo**
Cordless Palm Router
(0 601 6B0 0L0)**HEAVY DUTY**

100 pts

FLEXIBLE POWER SYSTEM

BRUSHLESS MOTOR

Capacity	
Battery Voltage	: 12 V
Collect Size	: 8 (UNI), 6 & 1/4 (RAP) mm
No-load rotation	: 13,000 min ⁻¹
Weight	: 1.1 kg

**GKS 12V-LI Solo****
Cordless Circular Saw
(0 601 6A1 0L2)**HEAVY DUTY**

70 pts

Capacity	
Battery Voltage	: 12 V
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

GHO 12V-20 Solo**
Cordless Planer
(0 601 5A7 0K0)**HEAVY DUTY**

120 pts

Capacity	
Battery Voltage	: 12 V
No-load Rotation	: 14,500 rpm
Planing Depth (optimal)	: 0 -1.0 (2.0) mm
Planing width max	: 40 mm
Weight w/o Battery	: 1.5 kg

GLI 12V-330 Solo**
Cordless Torch
(0 601 4A0 000)**HEAVY DUTY**

30 pts

Capacity	
Battery Voltage	: 12 V
Runtime	: 6 h
Brightness	: 330 lmn
Brightness (1m Dis.)	: 350 lux
Weight	: 0.3 kg

Cordless Screwdriver**BOSCH GO 3 KIT**
Cordless Screwdriver
(0 601 9H2 281)**HEAVY DUTY**

30 pts




Capacity	
Battery Voltage	: 3.6 V
Battery	: 2.0 Ah
Torque (Min/Soft/Hard)	: 0.1/2.5/5 Nm
Speed	: 360 rpm
Charging Port	: USB-C
Work LED	: Ring LED & Battery Status

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

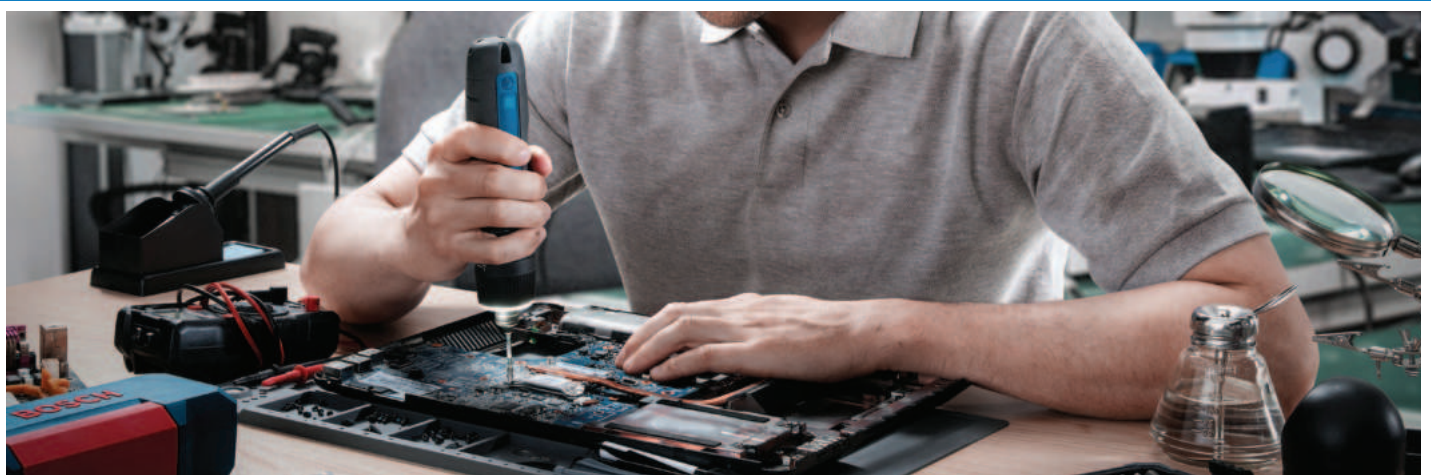

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

12 V Li-Ion Battery Pack



GBA 12V 2.0 Ah
(1 600 A00 F6X)



GBA 12V 4.0 Ah
(1 600 A00 F71)



GBA 12V 6.0 Ah
(1 600 A00 X7H)

18 V Li-Ion Battery Pack



GBA 18V 2.0 Ah
(1 600 A00 1CG)



GBA 18V 4.0 Ah
(1 600 A00 163)

ProCORE 18V Battery Pack



ProCORE 18V 4.0 Ah
(1 600 A01 93L)



ProCORE 18V 8.0 Ah
(1 600 A01 93N)



ProCORE 18V 12.0 Ah
(1 600 A01 93R)

Charger - 12V



GAL 12V-40
(for 10.8 V &
12 V Battery)
(1 600 A01 B8Z)

ProCORE 18V+



ProCORE 18V+ 8.0Ah
(1 600 A02 X00)

Charger - 18V



GAL 18V-20
(for 18 V Battery)
(1 600 A02 1KV)



GAL 18V-40
(for 14.4 V &
18 V Battery)
(1 600 A01 B92)



GAL 1880 CV
(for 14.4 V &
18 V Battery)
(1 600 A00 B8H)



GAL 18V-160 C
(for 18 V Battery)
(1 600 A01 9S7)



GAL 18V6-80
(For 14.4-18V)
(1600A01U9M)

Starter Kit



12V 2.0 Ah (2 Batteries)
+ GAL 12 V-40 (1 Charger)
(1 600 A01 B8Y)



18V 2.0 Ah (2 Batteries)
+ GAL 18V-40 CV (1 Charger)
(1 600 A01 B91)



18V 4.0 Ah (2 Batteries)
+ GAL 18V-40CV (1 Charger)
(1 600 A01 9S1)

ProCORE 18 V Starter Kit



ProCORE starter kit
18V 4.0 Ah (2 Batteries)
+ GAL 1880 CV (1 Charger)
(1 600 A01 6GG)



ProCORE starter kit
18V 8.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GR)



ProCORE starter kit
18V 12.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GZ)

L-BOXX



L-BOXX 102
(1 600 A01 2FZ)



L-BOXX 136
(1 600 A01 2G0)



L-BOXX 238
(1 600 A01 2G2)



L-BOXX 374 (Indent)
(1 600 A01 2G3)



NEW!
L-Boxx 72
(1 600 A00 1RW)



NEW!
L-Boxx 72 Set 10
(1 600 A00 1S8)



NEW!
L-boxx Mini
(1 600 A00 7SF)

Trolley / Roller

L-BOXX Trolley
(1 600 A00 1SA)



L-BOXX Roller
(1 6000 A00 1S9)



Bosch mobility system



NEW!
GWT 20 Professional
(1 600 A02 5L6)

NEW!
GWT 2 Professional
(1 600 A02 65S)



NEW!
GWT 4 Professional
(1 600 A02 65T)

NEW!
Belt 108 Professional
(1 600 A02 65N)



NEW!
ProClick Holder Professional
(1 600 A02 65U)

Bosch Professional Tool Bag



NEW!
Bosch Professional
Medium Tool Bag
(1 600 A00 3BJ)



NEW!
Bosch Professional
Large Tool Bag
(1 600 A00 3BK)

More power



+87%
more power*

ProCORE18V:
latest cell technology
and intelligent battery
management.

Faster charging



9 min.
to 50%[†]

Power Boost Mode:
get back to work
faster than ever.

Longer lifetime



Up to
135%
longer
lifetime[‡]















COOLPACK 2.0
technology:
prevents the battery
from overheating.

* GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860W vs. 1620W.

† To reach 50% charge of the ProCORE18V 4.0Ah (in Power Boost Mode). As of May 2019.

‡ Vs. no Bosch COOLPACK 2.0 technology.

Charging Time For Battery Capacity (Minute)

		12 V Charger				18 V Charger				
12 V										
		GAL 12V-40 (1 600 A01 B8Z)	GAL 18V-20 CV (1 600 A02 1KV)	GAL 18V-40 CV (1 600 A01 B82)	GAL 1880 CV (1 600 A00 B8H)	GAL 18V-160 C (1 600 A01 9S7)				
		35								
		2.0 Ah (1 600 A00 F6X)								
		4.0 Ah (1 600 A00 F71)	65							
		6.0 Ah (1 600 A00 X7H)	95							
18 V		2.0 Ah (1 600 A00 1CG)	65	40	15	-				
		4.0 Ah (1 600 A00 163)	125	60	35	25				
		4.0 Ah (1 600 A01 93L)	-	-	50	50				
ProCORE 18 V		8.0 Ah (1 600 A01 93N)	-	-	65	55				
		12.0 Ah (1 600 A01 93F)	-	-	90	60				

* Above data is based on approximate charging time

Drill

GBM 400
(0 601 1C1 0L0)



20 pts

Capacity	
Power	: 400 W
No-load Speed	: 0-2,000 rpm
Chuck Type	: Keyless
Chuck Capacity	: 10 mm
Steel Drilling	: 10 mm
Aluminum Drilling	: 13 mm
Wood Drilling	: 20 mm
Weight	: 1.3 kg

GBM 10 RE
(0 601 473 5L0)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 450 W
In Steel	: 10 mm
In Aluminium	: 10 mm
In Wood	: 25 mm
No-load Speed	: 0 - 2,600 rpm
Weight	: 1.3 kg

GBM 13 RE
(0 601 477 5L0)

HEAVY DUTY



50 pts

Capacity	
Power Input	: 600 W
In Steel	: 13 mm
In Aluminium	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 2,600 rpm
Weight	: 1.70 kg

GBM 13 HRE
(0 601 049 603)

HEAVY DUTY



105 pts

Capacity	
Power Input	: 550 W
In Steel	: 13 mm
In Aluminium	: 20 mm
In Wood	: 40 mm
No-load Speed	: 0 - 550 rpm
Torque (Approx.)	: 40 Nm
Weight	: 2.1 kg

Impact Drill

GBM 50-2
(0 601 1B4 0L0)

HEAVY DUTY



720 pts

Capacity	
Power	: 1,200 W
No-load Speed	: 50-255 / 100-510 rpm
Annular Cutter	: Ø50 mm
Max. Twist Drill	: Ø23 mm
Max Thread	: M16
Magnetic Force	: 14,000 N
Weight	: 14.7 kg

GSB 16 RE
(0 601 228 1L2)

HEAVY DUTY



60 pts

Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Weight	: 1.8 kg

GSB 20-2 RE
(0 601 1A2 1L0)

HEAVY DUTY



90 pts

Capacity	
Power Input	: 800 W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 40 mm
No-load Speed	: 0 - 1,100 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000 bpm
Weight	: 2.6 kg

GSB 600
(0 601 1A0 3L0)

HEAVY DUTY



20 pts

Capacity	
Rated Power	: 600 W
No-load Speed	: 0 - 3,000 rpm
Impact Rate	: 0 - 48,000 bpm
Chuck Capacity	: 13 mm
Metal Drilling	: 10 mm
Masonry Drilling	: 13 mm
Wood Drilling	: 25 mm
Weight	: 1.7 kg

Multi Cutter

GOP 30-28
(0 601 237 0L0)

HEAVY DUTY



1 619 P02 870

90 pts

Capacity	
Power Input	: 300W
Oscillating amplitude	: 2.8° (2 x 1.4°)
No-load Speed	: 8,000 - 20,000 opm
Weight	: 1.5 kg

Foam Cutter

GSG 300
(0 601 575 103)

HEAVY DUTY



300 pts

Capacity	
Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,500 spm
Weight	: 1.6 kg

Straight Grinder

GGs 28 C
(0 601 220 070)

HEAVY DUTY



70 pts

Capacity	
Power Input	: 600 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 30,000 rpm
Weight	: 1.4 kg

GGs 30 LS
(0 601 2B5 0L0)

HEAVY DUTY



80 pts

Capacity	
Voltage	: 110 - 127 / 220 - 240 V
Power	: 750 W
No-load Speed	: 7,000 - 33,000 rpm
Max. collet dia.	: 8 mm
Max. grinding wheel dia.	: 50 mm
Weight	: 1.7 kg
Grip size	: 192 mm

4" Angle Grinder

GWS 700
(0 601 3A3 1L0)



1 619 P11 715

20 pts

Capacity	
Voltage	: 220 - 240 V
Power	: 710 W
No-load Speed	: 12,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 185 mm
Spindle	: M10
Weight	: 1.6 kg

GWS 750-100
(0 601 394 0L0)

HEAVY DUTY



30 pts

Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Weight	: 1.8 kg

GWS 7-100 ET
(0 601 388 5L0)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 720 W
Grinding / Cutting Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Weight	: 1.8 kg

GWS 900-100
(0 601 396 0L0)

HEAVY DUTY



50 pts

Capacity	
Power Input	: 900 W
Grinding / Cutting Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

18V BITURBO

12V Cordless

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Router, Glue Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

GWS 900-100 S (0 601 396 1L0)

HEAVY DUTY



1 619 P11 715

50 pts

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Weight	: 1.9 kg

GWS 9-100 P (0 601 396 5L0)

HEAVY DUTY



1 619 P11 715

40 pts

Capacity	
Power Input	: 900 W
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg

5" Angle Grinder

GWS 12-125 S (0 601 3A6 0P0)

HEAVY DUTY



70 pts

Capacity	
Input Power	: 1,200 w
No-load Speed	: 2,800 - 11,000 / 2,800 - 10,000 rpm
Disc Diameter	: 125 mm
Spindl size	: M14
EPTA Weight	: 2.2 kg

GWS 12-125 P (0 601 3A6 2L0)

HEAVY DUTY



70 pts

Capacity	
Input Power	: 1,200 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 125 mm
Spindle Size	: M14
Voltage	: 110V - 127V
EPTA Weight	: 2.2 kg

NEW!

GWS 17-125 CI (0 601 79G 002)

HEAVY DUTY



1607 000 V37

90 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Weight	: 2.4 kg

GWS 18-125 L (Indent) (0 601 7A3 0L0)

HEAVY DUTY



1607 000 V37

90 pts

Capacity	
Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Weight	: 2.5 kg

6" Angle Grinder

GWS 17-150 CI (0 601 79K 002)

HEAVY DUTY



1 607 000 V37

100 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 9,300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm
Weight	: 2.4 kg

7" Angle Grinder

GWS 2200-180 (0 601 8C0 0L0)



80 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 8,500 rpm
Spindle Thread	: M14
Disc Diameter	: 180 mm
Main Handle	: Barrel
Weight	: 5.2 kg

GWS 24-180 JZ (0 601 8C2 3L0)

HEAVY DUTY



90 pts

Capacity	
Power Input	: 2,400 W
No-load Speed	: 8,500 rpm
Spindle Thread	: M14
Disc Diameter	: 180 mm
Main Handle	: Barrel
Weight	: 5.8 kg

GWS 30-180 B (0 601 8G0 0L0)

HEAVY DUTY



200 pts

Capacity	
Rated Input Power	: 2,800 W
No-load speed	: 8,500 rpm
Disc Diameter	: 180 mm
Spondler Size	: M14
Main handle	: Rattail
Rubber backing pad, diameter	: 180 mm
Wire cup Brush, diameter	: 100 mm
Weight	: 5.7 kg

9" Angle Grinder

GWS 2200-230 (0 601 8C1 0L0)



90 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14
Disc Diameter	: 230 mm
Main Handle	: Barrel
Weight	: 5.4 kg

GWS 24-230 JZ (0 601 8C3 3L0)

HEAVY DUTY



110 pts

Capacity	
Power Input	: 2,400 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14
Disc Diameter	: 230 mm
Main Handle	: Barrel
Weight	: 6 kg

GWS 30-230 B (0 601 8G1 0L0)

HEAVY DUTY



200 pts

Capacity	
Rated Input Power	: 2,800 W
No-load speed	: 6,500 rpm
Disc Diameter	: 230 mm
Spondler Size	: M14
Main handle	: Rattail
Rubber backing pad, diameter	: 230 mm
Wire cup Brush, diameter	: 100 mm
Weight	: 5.9 kg
Switch	: Lockable Switch

Marble Cutter

GDC 140 (0 601 3A4 0L0)



30 pts

Capacity	
Power Input	: 1,400 W
No-load Speed	: 13,200 rpm
Max. Cutting Disc Diameter	: 115 mm
Max. Cutting Dept	: 35 mm
Weight	: 2.9 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

Bench Grinder

GBG 35-15
(0 601 27A 3L0)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20
(0 601 27A 4L0)

HEAVY DUTY



70 pts

Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg

Reciprocating Saw

GSA 120
(0 601 6B1 0L0)



80 pts

Capacity	
Input Power	: 1,200 W
Stroke Rate	: 0 - 3,000 spm
Stroke Length	: 29 mm
Max. Cutting Dept in Wood	: 220 mm
in Metal	: 220 mm
Weight	: 3.7 kg

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY



260 pts

Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 spm
Weight	: 2.0 kg

Jigsaw

GST 700
(0 601 2A7 0L0)



40 pts

Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

GST 90 BE
(0 601 58F 0L0)

HEAVY DUTY



90 pts

Capacity	
Rated power input	: 650 W
No-load stroke rate	: 500 - 3,100 spm
Stroke length	: 26 mm
Cutting Capacity	
- Wood	: 90 mm
- In aluminium	: 20 mm
- In steel (unalloyed)	: 10 mm
Weight	: 2.6 kg

GST 680
(0 601 5B4 0L1)



40 pts

Capacity	
Power	: 500 W
Stroke Rate	: 800 - 3,100 spm
Stroke Length	: 20 mm
Cutting Depth	: 68 mm
Bevel Angle	: -45° ~ +45°
Weight	: 2.0 kg

Block Cutter

GAC 250
(0 601 2B6 0L0)



110 pts

Capacity	
Input power	: 1,200 W
No-load chian speed	: max. 12 m/s
Chain bar length	: 335 mm
Max. cutting capacity	: 250 mm
Tool weight (incl. accessories)	: 4.7 kg
Bare too size (L*W*H)	
(include. auxiliary handle)	: 310x210x210 mm
Dust extraction interface	: Yes

GST 750 Professional (0 601 5B4 1L0)

Power up to excellent cutting!

NEW!

WHY THIS

- 01** Faster and more precise cutting experience with powerful 520 W motor
- 02** Precise cuts and fine finishing with 4-stage orbital actions
- 03** Adjustable speed for different materials with the pre-selection speed wheel

Optimized for cutting diverse materials

Optimized adjustable cutting performance in multiple materials with pre-selection speed wheel

More powerful and speed

A cutting experience with more speed and precision, thanks to the powerful 520 W motor

High performance in speed and precision

Faster and/or more precise cuts with the help of 4-stage orbital actions

Faster and easier blade change

Faster and easier blade change with SDS blade holder

Fatigue free for long work time

Superior holding experience with ergonomic handle design using soft rubber for longer work hours with less effort

Better dust extraction result

Easy work with a vacuum cleaner with the integrated dust extraction port (no adapter required)

Full control while cutting

Full control while cutting and compatible with guide rail secured by robust baseplate, and protecting expensive workpieces from scratches with plastic cover shoe

Secured cutting quality

Secured cutting quality with removable front dust cover and anti-splinter guard for protecting material surface



40 pts

TARGET USERS

• Installers (Cabinet / Kitchen / Fair)

• Carpenter



GST 750	Unit	Specifications
Voltage	V	220 - 240 V; 50 - 60 Hz
Power	W	520
Stroke rate	spm	800 - 3,200
Stroke length	mm	20
Cutting depth	mm	75
Bevel angle	°	-45 ~ +45
Weight	kg	2.2

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GCO 230 Professional (0 601 B56 0L0)

Cuts steel faster and smoother

NEW!

WHY THIS

01

Safety and health

Adjustable spark guard lead the sparks to the back to keep you safe

02

Cuts faster & smoother

Powerful 2,300 W motor to help you get job done efficiently

03

Long lifespan

Higher load endurance capability to achieve extreme overload performance

Cuts faster and smoother ^{SP}

With improved 2,300 W motor

Achieve extreme overload performance ^{USP}

Thanks to the higher load endurance capacity

Keeps you safe ^{USP}

With adjustable spark guard to lead sparks to the back

Easy to carry and operate for both left- and right-handed users

Thanks to the ergonomically designed handle

Prevents melting during cutting

With the metal foot



TARGET USERS

- Industrial metal fabrication
- Civil engineering
- Metal installation & locksmith



GCO 230

Unit	Specifications
Input power	W 2,300
No-load speed	rpm 4,100
Cutting capacity(round pipe)	mm Ø 129
Cutting capacity(square bar)	mm 120 x 120
Cutting capacity(rectangle)	mm 100 x 200
Cutting capacity(L-profile)	mm 137
Weight	kg 13.5

90 pts

Circular Saw

GKS 140 (0 601 6B3 0L1)



60 pts

Capacity	
Input Power	: 1,400 W
No-load Speed	: 6,200 rpm
Blade Bore Size	: 20 mm
Diameter	: 184 mm
Max. Cutting Dept	: 64+/- mm
Bevel Capacity	: 0 - 45°

GKS 190 (0 601 623 0L9)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Weight	: 4.1 kg

GKS 235 Turbo (0 601 5A2 0L0)

HEAVY DUTY



110 pts

Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Weight	: 7.6 kg

Cut-off Machine

GCO 220 (0 601 B37 3L0)



70 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity	
Square Bar	□ : 119 x 119 mm
Round Bar	○ : 129 mm
Weight	: 15 kg

GCO 14-24J (0 601 B37 2L0)

HEAVY DUTY



105 pts

Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	
□	: 100 x 196 mm
□	: 119 x 119 mm
□	: 130 x 130 mm
Weight	: 18.1 kg

Mitre Saw

GCM 10 MX (0 601 B29 0L0)

HEAVY DUTY



150 pts

Capacity	
Power Input	: 1,700 W
Blade Size	: 254 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Weight	: 16.8 kg

GCM 12 GDL (0 601 B23 670)

HEAVY DUTY



520 pts

Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Weight	: 32.1 kg

GCM 216 (0 601 B33 0L0)



150 pts

Capacity	
Power Input	: 1,300 W
Saw Blade diameter	: 216 mm
Mitre Setting	: 47° L / 47° R
Bevel Setting	: 47° L / 0° R
Rated Input Power	: 1,300 W
Cutting Capacity, 0°	: 60 x 123 mm
Cutting Capacity, 45° Mitre	: 60 x 80 mm
Cutting Capacity, 45° Bevel	: 43 x 123 mm
No-load Speed	: 4,800 rpm
Weight	: 10.1 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GCM 254 D (0 601 B53 0L0)



250 pts

Capacity	
Power Input	: 1,300 W
Saw Blade diameter	: 216 mm
Mitre Setting	: 47° L / 47° R
Bevel Setting	: 47° L / 0° R
Rated Input Power	: 1,300 W
Cutting Capacity, 0°	: 60 x 123 mm
Cutting Capacity, 45° Mitre	: 60 x 80 mm
Cutting Capacity, 45° Bevel	: 43 x 123 mm
No-load Speed	: 4,800 rpm
Weight	: 10.1 kg



Slide Mitre Saw

GCM 8 SJL (0 601 B19 1L0)

HEAVY DUTY



210 pts

Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Weight	: 17.3 kg

Mitre Saw Stand

T 1B (0 601 B12 310)



Capacity	
Length of Work Bench without Extension	: 1,220 mm
Length of Work Bench with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

GTS 254 (0 601 B45 0L0)




140 pts

Capacity	
Cutting depth 90° / 45°	: 80 / 55 mm
Rip cut capacity	: 545 mm
Power	: 1,800 W
Saw blade diameter	: 254 mm
Overload / restart protection	: Yes
Weight with Stand	: 24.4 kg
Stand Feet	: Yes
Table Material	: Steel with Coating
No-Load Speed	: 4,300 rpm

GTS 10 J (0 601 B30 5L1)

HEAVY DUTY



310 pts

Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (Right)	: 635 mm
(Left)	: 255 mm
Weight	: 26 kg

Table Saw Stand

GTA 600 (0 601 B22 002)



Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE (0 601 387 0L0) / (0 601 387 5L0)

HEAVY DUTY



60/70 pts

Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Weight	: 1.3 kg

Planer

GHO 6500 (0 601 596 0L0)




40 pts

Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg



GHO 10-82 (0 601 594 006)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Weight	: 2.5 kg

Belt Sander

GBS 75 A (0 601 274 004)

HEAVY DUTY



130 pts

Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Weight	: 3.2 kg

GBS 750 (0 601 2C1 0L0)

NEW!



60 pts

Capacity	
Input power	: 850 W
No-load chian speed	: 200-420m/min
Sanding Belt Length	: 533 mm
Sanding Belt Width	: 75 mm
Belth Speed Preselection	: Yes
Weight	: 3.6 kg



Polisher

GPO 950 (0 601 3A2 0L0)

70 pts



Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 2.3 kg

GPO 12 CE (0 601 389 0L0)

HEAVY DUTY



90 pts

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Weight	: 2.5 kg

18V Cordless

18V BITURBO

12V Cordless

Orbital Sander

GEX 125
(0 601 3A8 0L0)

NEW!



40 pts

Capacity	
Power Input	: 280 W
No-load Speed	: 7,500 - 12,000 rpm
Sanding Sheet Diameter	: 125 mm
Height	: 149 mm
Sanding Stroke	: 2.6 mm
Vibration	: 3.8 m/s ²
Weight	: 1.4 kg



GSS 140
(0 601 2A8 0L0)



20 pts

Capacity	
Power Input	: 220 W
No-load Speed	: 14,000 rpm
No-load Orbital Stroke Rate	: 28,000 min ⁻¹
Orbital Diameter	: 1.5 mm
Sanding Sheet Dimension	: 114 x 140 mm
Sanding Plate Dimension	: 101 x 112 mm
Weight	: 1.2 kg

GSS 2300
(0 601 298 0L0)



30 pts

Capacity	
Power Input	: 190 W
No-load Speed	: 12,000 rpm
Weight	: 1.5 kg

Hot Air Gun

GHG 18-60
(0 601 2A6 1L0)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 l/min
Weight	: 0.52 kg

GHG 20-63
(0 601 2A6 2L0)

HEAVY DUTY



60 pts

Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: 150 / 300 / 500 l/min
Weight	: 0.65 kg



Trimming / Router

GKF 550
(0 601 6A0 0L0)



40 pts

Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

Battery, Charger, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer Drill

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

Glue Gun

GOF 130
(0 601 6B7 0L1)



70 pts

Capacity	
Power	: 1,300 W
No-load speed	: 11,000 - 28,000 rpm
Bit holder	: 6 - 8.0 mm
Plunge depth	: 55 mm
Weight	: 3.5 kg

Strictly prohibited from being used upside down

GKP 200 CE
(0 601 950 703)

HEAVY DUTY



55 pts

Capacity	
Power Input	: 500 W
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Weight	: 0.4 kg



Blower

GBL 650
(0 601 9M4 0L0)



30 pts

Capacity	
Power	: 650 W
No-load speed	: 16,000 rpm
Air Flow Rate	: 3.7 m ³ /min
Weight	: 1.4 kg



GBL 82-270
(0 601 980 4L1)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m ³ /min
Weight	: 1.8 kg

Stirrer / Mixer

GRW 12 E
(0 601 1A7 070)

HEAVY DUTY



240 pts

Capacity	
Power Input	: 1,200 W
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Nominal speed	: 0 - 620 min ⁻¹
Weight	: 5.3 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GRW 140 Professional (0 601 1C4 0L0)

Now, mix faster and with ease!

NEW!

WHY THIS

- 01 Mix faster**
Faster and effortless mixing of large volumes thanks to high-performance 1,400 W motor
- 02 Comfortable mixing**
Comfortable mixing with less strain over long periods thanks to ergonomic wheel-shaped handle
- 03 Easy maintenance**
Saves time and maintenance with carbon brush LED lifespan indicator

Constant Speed

Motor speed and tool output power remain constant, bringing optimized motor efficiency

1,400 W Power Input ^{SP}

1,400 W powerful motor makes mix high density material at ease

On/off Switch With Lock On Button

Button is locked on at switch on mode, users don't have to keep pressing the button while mixing

Soft Start

Speed increases gradually when turn on the tool to prevent material splashes out and protect users' safety

^{USP} Carbon Brush Indicator

Alert the user by blinking in red color when carbon brush is at 95% usage

Easy Change Carbon Brush


Designed to change the carbon brush at ease that users can do by themselves

Wheeled Shaped Handle

Easier handling the tool with better balance and stable when mixing

2 Speed Selection

2 speeds are provided for mixing different materials

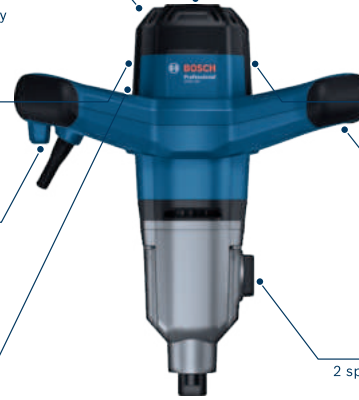

TARGET USERS

• Drywaller & Plasterer • Masonry & Restoration • General contractor • Painter • Tiler



GRW 140	Unit	Specifications
Input power	W	1,400
No-load speed	rpm	480 / 750
Max. torque	Nm	35 / 23
Tool holder	-	M14
Max. stirrer basket diameter	mm	140
On/off switch	-	Lock on
Weight (w/o Ac)	kg	4.2

⁽¹⁾
70 pts

GAS 400 A Professional (0 601 9M0 0L0)

Non-Stop work with full productivity

NEW!

WHY THIS

- 01 Continuous, strong suction power**
Bosch own inclusive Automatic Filter Cleaning (AFC) technology keeps filter clog-free with high airflow consistency to help you get job done faster
- 02 Easier dust dumping**
Emptying dust container is quicker and easier thanks to hose-less container design and standalone, anti-tipping motor head
- 03 Compact storage**
Saves storage and makes lifting easier with the integral hose storage design

Most compact storage ^{USP}

• Saves storage room and makes lifting easier thanks to integral hose storage design
• Highly convenient – you can transport the vacuum cleaner and your tools in one go thanks to L-Boxx compatible system



Effortless transportation possible

Telescopic handle optional with extra purchase

^{USP} Continuous strong suction power

• Continuous strong suction power ups productivity with Bosch own inclusive Automatic Filter Cleaning (AFC) technology
• Different applications possible with two AFC modes
• "A" - Automatic mode: 2 cleaning strokes every 15 seconds
• "M" - Manual mode: 2 cleaning strokes for each button click



Easy dust dumping ^{SP}

• Well protected from tipping over during dust dumping due to standalone motor head design
• No more hose removal during dust dumping and offers a super-clean container with the hose-less container design

Basic protection

• Basic protection against dust penetration thanks to L-Class certified system
• Anti-static shock protection provided by the conductive adapter and hose system



⁽¹⁾
280 pts



TARGET USERS

• Industrial metal fabrication • Civil engineering • Metal installation & locksmith



GAS 400 A	Unit	Specifications
Input power	W	1,200
Container gross volume	L	40
Container net volume (dry)	L	28
Max. airflow (at turbine)	l/s	80
Max. vacuum pressure (at turbine)	Kpa	24
Hose diameter and length	mm*m	Ø 28*4
Power cord length	m	7
Weight	kg	14.0

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. ⁽¹⁾ Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill, Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planer, Sander, Polisher, Hot Air Gun, Nail Gun, Cable Gun, Blower, Vacuum

18V Cordless

18V BITURBO

12V Cordless

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer Drill

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

Wet & Dry Vacuum Cleaner

GAS 15
(0 601 9E5 0L0)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Max. Airflow Rate (Turbine)	: 53 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg

GAS 12-25 PL
(0 601 97C 1L0)

HEAVY DUTY



110 pts

Capacity	
Power Input	: 1,250 W
Container (gross/net)	: 25/21 litre
Max. Airflow Rate (Turbine)	: 65 l/sec
Max. Vacuum Pressure	: 200 mbar
Weight	: 9.0 kg

2 kg Rotary Hammer

GBH 220
(0 611 2A6 0L0)



60 pts

Capacity	
Impact Energy	: 2J
Power	: 720 W
No-load Speed	: 0 - 2,000 rpm
Max. drilling & Concrete	: 22 mm
Mode	: 3
Weight	: 2.3 kg

GBH 2-24 DRE
(0 611 272 1L0)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 930 rpm
Impact Rate	: 0 - 4,200 bpm
Weight	: 2.8 kg

GBH 2-26 DRE
(0 611 253 76C)

HEAVY DUTY



120 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.7 kg



GBH 2-26 DFR
(0 611 254 76C)

HEAVY DUTY



140 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 3 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.9 kg

GBH 2-28 DFV
(0 611 267 2L1)

HEAVY DUTY



150 pts

Capacity	
Power Input	: 850 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Weight	: 3.1 kg

GBH 6-42 C Professional (0 611 278 0L0)

Top-level protection for your heavy-duty drilling and chiseling needs!

HEAVY DUTY

NEW!

WHY THIS

- 01 Top-level protection**
2-in-1 hammer with mechanical (safety clutch, vibration damped handle) & electronic (KickBack Control, Rest & Vibration Reminder) solutions to protect user health
- 02 Ease of use**
New first-in-class user interface and Connectivity App that helps you to control the tool and select the operation mode you need
- 03 Stress-free maintenance**
Brushless motor & Auto Gear Rotation system reduce regular maintenance & tool downtime

Superior performance

An improved impact mechanism and highly capable drive train lead to high performance ≥ 9 J impact energy

9.0 J	3100 bpm	1300 W
-------	----------	--------



USP Simplify tough work (smart tool control)

- Bluetooth connectivity for personalization via App
- User Interface for real-time tool status
- Working mode choice via User Interface
 - Customized soft start
- Signal switch for variable rotation speed
 - Preventive maintenance



USP Keep the PROs fit (minimized arm injuries)

- KickBack Control will automatically stops the tool when there is sudden kickback
- Effective vibration control (damped handle)
- Vibration reminder protects from Hand-Arm Vibration Syndrome (HAVS)
 - Rest reminder maintains a healthy balance between working and rest




Outstanding reliability

- Brushless technology (BLAC) with Auto Gear Rotation (AGR) for a long-lasting tool
- Maintenance reminder prevents unexpected downtime



TARGET USERS

- General Contractor
- Civil Engineering
- HVAC & Electrician



GBH 6-42 C	Unit	Specifications
Input power	W	1,300
Impact energy	J	9.0
Impact rate	bpm	0-3, 100
Rated tool speed	rpm	0-360
Max. drilling Ø concrete	mm	42
Vibration drilling / chiselling	m/s ²	14.1 / 9.5
Tool holder	-	SDS-Max
Weight	kg	7.7


460 pts

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

3 kg Rotary Hammer

GBH 3-28 DFR
(0 611 24A 0L0)

HEAVY DUTY



Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 3.6 kg

4 kg Rotary Hammer

GBH 4-32 DFR
(0 611 332 1L0)

HEAVY DUTY



Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D
(0 611 269 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpm
Weight	: 6.8 kg

GBH 5-40 DCE
(0 611 264 070)

HEAVY DUTY



Capacity	
Power Input	: 1,150 W
Impact Energy	: 8.8 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilling / Chiselling	: 10.5 / 7 / 5 m/s ²
Weight	: 6.8 kg

GBH 8-45 D
(0 611 265 1L0)

HEAVY DUTY



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,720 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Rated Speed	: 150 - 305 rpm
Weight	: 8.2 kg

GBH 8-45 DV
(0 611 265 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s ²
Weight	: 8.9 kg

Demolition Hammer

GSH 500 GEN II
(0 611 338 6L0)



Capacity	
Power Input	: 1,100 W
Impact Energy- EPTA Value	: 7.8J
Impact Rate	: 2,900 bpm
Tool holder	: Hex 17 mm
Auxiliary Handle	: Straight Handle
Weight	: 5.6 kg

GSH 3 E
(0 611 320 703)

HEAVY DUTY



Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 2.6 J
Weight	: 3.7 kg

GSH 5 (MAX)
(0 611 337 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,100 W
Impact Rate	: 2,850 bpm
Impact Energy	: 7.5 J
Weight	: 5.6 kg



GSH 5 CE
(0 611 321 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Energy	: 8.3 J
Weight	: 6.2 kg

GSH 9 VC
(0 611 322 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s ²
Weight	: 8.5 kg

GSH 11 E
(0 611 316 8L1)

HEAVY DUTY



Capacity	
Power Input	: 1,500 W
Impact Energy	: 16.8 J
Impact Rate	: 900 - 1,890 bpm
Vibration Value	: 18.5 m/s ²
Weight	: 10.1 kg

GSH 11 VC
(0 611 336 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s ²
Weight	: 11.4 kg

GSH 14 C (HEX)
(0 611 344 0L0)

HEAVY DUTY



Capacity	
Rated Input Power	: 1,750 W
Impact Energy (EPTA)	: 28 J
Impact Rated at	: 1,900 bpm
Rated Speed	
Weight (EPTA-01:2014)	: 14.6 kg
Tool Holder	: Hex 22 mm
Vibration emission value ah	: 10.9
Uncertainty K	: 1.5

GSH 16-30 (HEX)
(0 611 335 1L0)

HEAVY DUTY



Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 41 J
Weight	: 16.9 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



BOSCH

The ultimate changing system.

JUST ONE CLICK.

XLOCK



GWX 9-125 S
(0 601 7B2 000)

HEAVY DUTY

XLOCK



80 pts

Capacity	
Rated Input Power	: 900 W
No-load Speed	: 2,800 - 11,000 rpm
Disc Diameter	: 125 mm
Power Output	: 450 W
Rubber Backing pad, Diameter	: 125 mm
Wire Cup Brush, Diameter	: 75 mm
Weight	: 2.1 kg
Switch	: Lockable Switch

GWX 14-125
(0 601 7B7 000)

HEAVY DUTY

XLOCK



70 pts

Capacity	
Rated Input Power	: 1,400 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 125 mm
Power Output	: 820 W
Rubber Backing pad, Diameter	: 125 mm
Wire Cup Brush, Diameter	: 75 mm
Weight	: 2.3 kg
Switch	: Lockable Switch



GWX 180 Solo**
(0 601 9H9 1K0)

XLOCK



80 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 1.8 kg

GWX 18V-10 C Solo**
(0 601 7B0 200)

HEAVY DUTY

XLOCK



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.0 kg

GWX 18V-10 PC Solo**
(0 601 7B0 700)

HEAVY DUTY

XLOCK



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.0 kg

GWX 18V-15 SC Solo**
(0 601 9H6 500)

HEAVY DUTY

XLOCK



170 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 - 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.3 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras such as adapters and accessories. You will also find mobile solutions for individual systems.















Listed adapters need to work with vacuum cleaner unless special remarked



























Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
GWS Series  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224		
	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
GSB Series 	For all GSB & GBH Holes Ø4-36 mm	Dust Cup 1.600.A00.D6H Work without vacuum		
	Holes or core cutter Ø4-24 mm	GDE 24 1 600 A01 M9V Work with or without vacuum		
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8		
GBH Series 	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z		
	For GBH 18V-26 and GBH 18V-28 CF Holes Ø 4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
	Only For GBH 185-LI	GDE 12 1600A02BW0		
GSH Series 	For chiseling Max length 600 mm	GDE Max 1 600 A00 1G9		
	For breaking	GDE HEX 1 600 A00 1GA		
GST Series 	GST 12 V-LI GST 700	1 619 P10 585 Dust adapter included		
GKS Series 	GKS 190 GKS 7000 GKS 12 V-Li GKS 66 X / GKS 18 V-57	1 619 P06 204 1 619 P11 691 1 619 P11 537 1 619 P11 691		

Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application

Concrete: ■ Optimal ■ Total range of all application

Products		Drilling diameter in concrete, masonry (mm)																												Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13			
2 kg Hammers	 GBH 220 Professional	■ ■																												■				■	
	 GBH 2-24 DRE Professional	■ ■																												■				■	
	 GBH 2-26 DRE Professional	■ ■																												■				■	
	 GBH 2-26 DFR Professional	■ ■																												■				■	
	 GBH 2-28 DFV Professional	■ ■																												■				■	
2 kg Cordless Hammers	 GBH 180-LI Professional	■ ■																												■				■	
	 GBH 185-LI Professional	■ ■																												■				■	
	 GBH 187-LI One Chuck Professional	■ ■																												■				■	
	 GBH 18 V-26 Professional	■ ■																												■				■	
3 kg Hammer	 GBH 3-28 DFR Professional	■ ■																												■				■	
4 kg Hammer	 GBH 4-32 DFR Professional	■ ■																												■				■	
6 kg Hammer	 GBH 5-40 DCE Professional	■ ■																												■				■	
	 GBH 6-42 C Professional	■ ■																												■				■	
8 kg Hammer	 GBH 8-45 D / DV Professional	■ ■																												■				■	

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/ Chiselling ratio	Working direction	Special features
■				■				■	■	■	■	■	■	90% 10%	↕	
■	■			■				■	■	■	■	■	■	90% 10%	↕	
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	Quick change chuck
■	■	■		■	■			■	■	■	■	■	■	90% 10%	↕	Quick change chuck 
■				■				■	■	■	■	■	■	90% 10%	↕	 
■				■				■	■	■	■	■	■	90% 10%	↕	    
■				■				■	■	■	■	■	■	90% 10%	↕	      
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	  
■	■	■		■	■			■	■	■	■	■	■	80% 20%	↕	Quick change chuck 
■	■	■		■	■	■		■	■	■	■	■	■	70% 30%	↕	Quick change chuck 
				■	■	■		■	■	■				60% 40%	↕	
				■	■	■	■	■	■	■				60% 40%	↕	   
				■	■	■	■	■	■	■				50% 50%	↕	 Anti Vibration for GBH 8-45 DV only

Demolition Hammers application overview

■ Optimal ■ Possible

		Specification								
		Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
										
	GSH 3 E Professional	650 W	3.7 kg	2.6 J			■	■	■	■
	GSH 5 Professional	1100 W	5.6 kg	7.5 J			■	■	■	■
	GSH 500 (GEN II) Professional	1100 W	5.5 kg	7.8 J	17 mm Hex		■	■	■	■
	GSH 5 CE Professional	1150 W	6.2 kg	13 J			■	■	■	■
	GSH 9 VC Professional	1500 W	8.5 kg	13 J			■	■	■	■
	GSH 11 E Professional	1500 W	10.1 kg	6-25 J				■	■	■
	GSH 11 VC Professional	1700 W	11.4 kg	23 J				■	■	■
	GSH 14 C Professional	1750 W	14.8 kg	28 J	22mm Hex					
	GSH 16-30 Professional	1750 W	16.9 kg	41 J	30 mm Hex					
Accessories		Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Tile chisel	SDS plus/SDS max				■	■		
		Spade chisel	SDS plus/SDS max/Hex 28/Hex 30				■	■	■	■
		Gouging chisel	SDS plus/SDS max							
		Bush hammer head	SDS max							
		Asphalt cutter	SDS max							
		Tamping plate	SDS max/Hex 28/Hex 30							
	Excavation chisel	SDS max/Hex 30								

Application

Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing reinforcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
						■	■	■	■	■
	■	■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■	■	
■	■									
■										
								■		
										■
								■		



BOSCH



MEASURING TOOLS PRODUCT CATALOGUE 2024

Bosch Professional

UPGRADE YOUR EFFICIENCY.


MeasureOn is your app for easy documentation of floor plans, measurements, photos, and notes. Benefit from a high degree of flexibility and process your data anywhere – on the construction site, at the office, on the move, or at home.

USE THE NEW INFINITE WORKSPACE

Start your project and save all information in one place – the digital workspace. Arrange the collected data according to your personal needs and expand the workspace at any time.

ADD PHOTOS

Take photos with your smart device, then simply insert them into the infinite workspace, and use your laser range finder to add measured values to your photos.

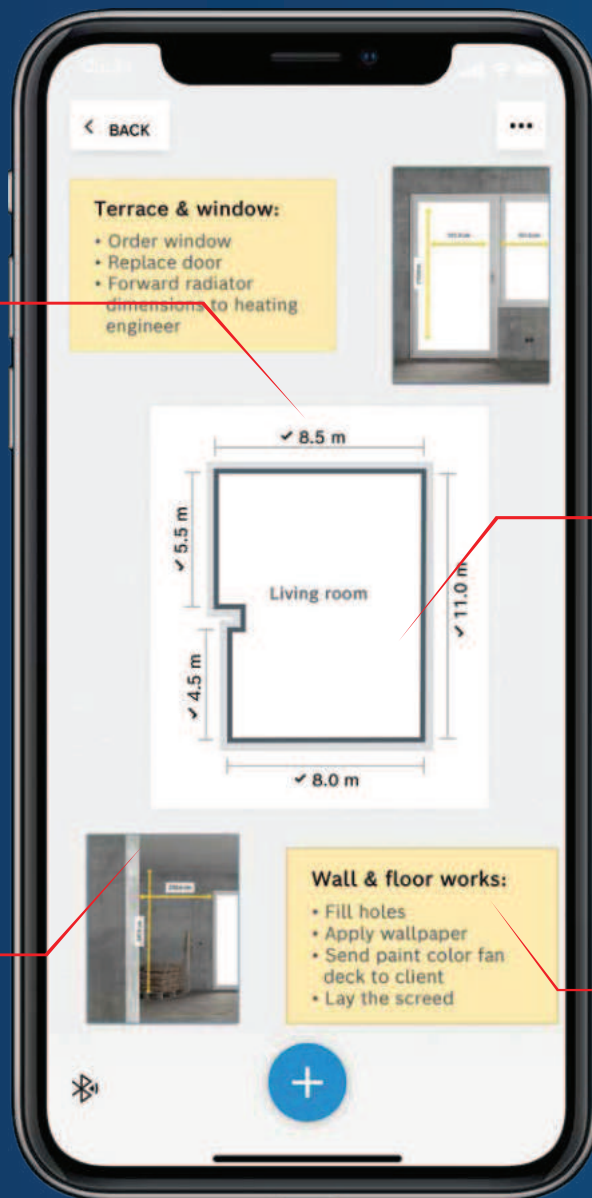

SKETCH FLOOR PLANS

Use your finger to quickly and intuitively sketch floor plans organised by individual rooms. With your laser range finder you can capture measurements instantly and insert them error-free into the app.

ADD NOTES

Say goodbye to scraps of paper: add all your notes to the flexible workspace and access them anywhere at any time.



iOS



Android

BOSCH LEVELLING REMOTE APP – CONTROLLING OF COMBI AND LINE LASERS VIA SMARTPHONE

With the Bosch Professional combi and line lasers, all kinds of levelling tasks can be completed with just one tool. As they are particularly easy to use, you can adjust the laser quickly and easily.

Experience even greater precision when you connect your tools to the Bosch Levelling Remote app via a Bluetooth® connection. This hands-free operation allows you to turn lines on and off, activate receiver mode or put your tool on standby without the slightest wobble of the laser. With the help of the RM 3 Professional motorised multifunctional mount, the laser lines can be adjusted accurate to the nearest millimetre. You can also adjust the visibility of the laser via the app according to the ambient light or remaining battery life.



iOS



Android



BOSCH THERMAL APP – MEASURE TEMPERATURES AND SEND THEM TO YOUR SMARTPHONE

With Bosch Professional infra-red camera for a rapid overview and thermo detector for detail, you can measure and record surface temperatures easily and quickly. Bosch thermo tools provide absolute reliability in areas such as heating, air conditioning and climate technology, plumbing, electrics or in industry.

Measurement and documentation has become simpler thanks to a Wi-Fi module that creates a Wi-Fi hotspot around it. This means you can import your results directly to the Bosch Thermal App and keep working with them there.



iOS



Android





LASER MEASURE

GLM 30-23 PROFESSIONAL

Simplify your Measurement



NEW!

15 pts




Technical Specifications

Part number	0 601 072 XK0
Laser class	2
Measuring range	0.15 – 30.00 m
Measuring accuracy	± 1.5 mm*
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	2 x AAA battery

GLM 40 PROFESSIONAL

Simple and Easy with One Push



Accessories

- Pouch

20 pts




Technical Specifications

Part number	0 601 072 9K0
Laser class	2
Measuring range	0.15 – 40.00 m
Measuring accuracy	± 2.0 mm*
Unit of measurement	m; ft
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	2 x AAA battery

GLM 400 PROFESSIONAL

Conversion at One Press



30 pts



Technical Specifications

Part number	0 601 072 RK0
Laser class	2
Measuring range	0.05 – 40.00 m
Measuring accuracy	± 1.5 mm*
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	Hand strap, 2 x AAA battery

GLM 50-23 G PROFESSIONAL

2-in-1 Laser Measure with Green Laser for Rough Jobsites



50 pts



Technical Specifications

Part number	0 601 072 VK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	2 x AA battery

GLM 50-27 CG PROFESSIONAL

Robust and Reliable Laser Measure with Green Laser for Excellent Visibility



50 pts



Technical Specifications

Part number	0 601 072 LK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 2 x AA battery

GLM 100-25 C PROFESSIONAL

Precise Laser Measure for Outdoor Measuring and Documenting



120 pts



Technical Specifications

Part number	0 601 072 YK0
Laser class	2
Measuring range	0.08 – 100.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 3 x AA battery

GLM 150 C PROFESSIONAL

Long Range Laser Measure Applicable for All Surroundings with Documentation



150 pts



Technical Specifications



Part number	0 601 072 FK0
Laser class	2
Measuring range	0.08 – 150.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, hand strap, 3 x AA battery



INCLINOMETER

GIM 60 L PROFESSIONAL

Laser-accurate Incline Transfer Over Longer Distances



130 pts




Technical Specifications

Part number	0 601 076 900
Laser class	2
Length	60 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Laser range	30 m
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.9 kg
Scope of delivery	Protective bag, 4 x AA battery

GIM 120 PROFESSIONAL

Longer for Better Precision



120 pts



Technical Specifications

Part number	0 601 076 800
Length	120 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0.05° (0°/90°); ± 0.2° (1°-89°)
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.4 kg
Scope of delivery	Protective bag, 4 x AA battery



GAM 220 PROFESSIONAL

Precise and Easy Angle Measurement



110 pts

ANGLE MEASURER

Technical Specifications	
Part number	0 601 076 500
Arm length	40 cm
Measuring range	0 – 220°
Measuring accuracy	± 0.1°
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.3 kg
Scope of delivery	Protective bag, 4 x AA battery



GPL 3 G PROFESSIONAL

Robust and Compact 3-point Laser with Highly Visible Green Laser Points



30 pts

POINT LASER

Technical Specifications	
Part number	0 601 066 N00
Laser class	2
Projection	3 points
Working range	up to 30 m
Accuracy	± 0.35 mm/m* ; ± 0.7 mm/m* (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery

GPL 5 G PROFESSIONAL

Robust and Compact 5-point Laser with Highly Visible Green Laser Points



60 pts

Technical Specifications	
Part number	0 601 066 P00
Laser class	2
Projection	5 points
Working range	up to 30 m
Accuracy	± 0.35 mm/m* ; ± 0.7 mm/m* (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery



GCL 2-50 CG PROFESSIONAL

Optimum Visibility Connected with Smart Functions




170 pts

COMBI LASER

Technical Specifications	
Part number	0 601 066 H80
Laser class	2
Projection	2 lines, 2 points
Working range	up to 50 m (line); 10 m (point)
Accuracy	± 0.3 mm/m* (line); ± 0.7 mm/m* (point)
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Lh-on / 10.8 V Lh-on
Weight	0.6 kg
Scope of delivery	Carrying case, pouch, RM 2, target plate, AA1, 4 x AA battery

GCL 2-15 G PROFESSIONAL

Combi Green Laser Level with Better Visibility

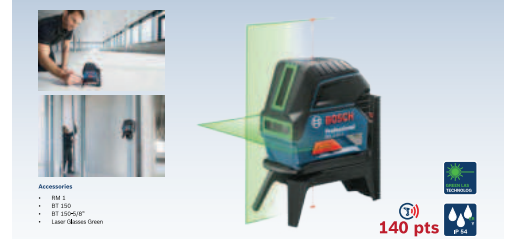

140 pts

Technical Specifications	
Part number	0 601 066 J00
Laser class	2
Projection	2 lines, 2 points
Working range	up to 15 m (line); 10 m (point)
Accuracy	± 0.3 mm/m* (line); ± 0.7 mm/m* (point)
Self-levelling range	± 4°
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying case, pouch, RM 1, ceiling clamp, target plate, 3 x AA battery



GLL 50-15 XG PROFESSIONAL

Simple and Versatile for Your Everyday Levelling Application



50 pts

LINE LASER

Technical Specifications	
Part number	0 601 065 7K1
Laser class	2
Projection	5 lines; 1 point
Working range	up to 50 m (line); 5 m (point)
Accuracy	± 0.2 mm/m* (horizontal); ± 0.3 mm/m* (vertical)
Self-levelling range	± 2.5°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying bag, 4 x AA battery

GLL 3-80 PROFESSIONAL

3 x 360° for Visibility on a New Level



300 pts

Technical Specifications	
Part number	0 601 063 S00
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.3 mm/m*
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Carrying case, pouch, target plate, 4 x AA battery

GLL 3-60 XG PROFESSIONAL

3 x 360° Green Line Laser
- All-round Levelling Solution



Accessories

- Mounting Clamp
- Laser Glasses
- BM 1
- GR 500
- BT 500
- BT 500


270 pts

Technical Specifications

Part number	0 601 063 ZK0
Laser class	2
Projection	3 x 360° lines
Working range	up to 60 m (radius)
Accuracy	± 0.3 mm/m [^]
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Carrying case, pouch, target plate, 4 x AA battery

GLL 3-80 CG PROFESSIONAL

Green Line Laser with Superior Visibility in 3 x 360°
- Simply Connected

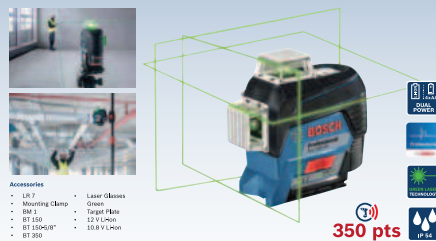

Accessories

- LR 7
- Mounting Clamp
- BM 1
- BT 500
- BT 1500
- BT 1500
- BT 500

350 pts

Technical Specifications

Part number	0 601 063 U80
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.2 mm/m [^]
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.9 kg
Scope of delivery	Carrying case, BM 1, ceiling plate, pouch, target plate, AA1, 4 x AA battery

GLL 18V-120-33 CG PROFESSIONAL

Unstoppable 18V Line Laser In Tough Conditions



NEW!

550 pts

Technical Specifications

Part number	0 601 065 1K0
Laser class	2
Projection	12 lines
Working range	up to 120 m (radius)
Accuracy	± 0.3 mm/m [^]
Self-levelling range	± 4°
Power supply	18V Li-Ion / 12V Li-Ion / 10.8V Li-Ion / 4 x 1.5V LR14 (C)
Weight	1.6 kg
Scope of delivery	L-Boxx 136, ceiling clip DK 20, target plate, battery adapter BA 18-12



ROTATION LASER

GRL 350 HV PROFESSIONAL

Rotational Laser for Horizontal and Vertical Application with Manual Dual Slope



Accessories

- WM 4
- WM 24
- RC 4
- BT 500
- BT 170 HD
- Laser Glasses
- Puff
- Target Plate
- GR 500

380 pts

Technical Specifications

Part number	0 601 061 S40
Laser class	3R
Working range	up to 350 m (diameter)
Accuracy	± 0.05 mm/m [^] (horizontal); ± 0.1 mm/m [^] (vertical)
Self-levelling range	± 5°
Power supply	2 x 1.5 V LR20 (D)
Weight	1.8 kg
Scope of delivery	Carrying case, LR 30, RB 30, WM 24, target plate, laser viewing glasses, 2 x D battery, 1 x 9V battery



OPTICAL LEVEL

GOL 26 D PROFESSIONAL

Robust and Reliable – Ideal for Long Distances



Accessories

- BT 500
- BT 370 HD
- GR 500

120 pts

Technical Specifications

Part number	0 601 068 000
Magnification	26 x
Working range	100 m
Accuracy	± 1.6 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob

GOL 32 D PROFESSIONAL

Robust Solution for Precise Levelling at Long Distances



Accessories

- BT 500
- BT 370 HD
- GR 500

140 pts

Technical Specifications

Part number	0 601 068 500
Magnification	32 x
Working range	120 m
Accuracy	± 1.0 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob



INSPECTION CAMERA

GIC 4-23 C PROFESSIONAL

High-Resolution Camera for Quick and Easy Inspection and Documentation



NEW!

150 pts

Technical Specifications

Part number	0 601 241 5K0
Length of camera cable	150 cm
Display resolution	800 x 480 px
Display size	4.3"
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.7 kg
Scope of delivery	Carrying bag, AA 1, 150 cm camera cable, hook magnet, mirror, USB-C cable, 4 x AA battery

GIC 5-27 C PROFESSIONAL

High-Resolution Camera and Automatic Upright Viewing for In-depth Inspection and Documentation



NEW!

180 pts

Technical Specifications


Part number	0 601 241 4K0
Length of camera cable	150 cm
Display resolution	1280 x 720 px
Display size	5"
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.7 kg
Scope of delivery	Carrying bag, AA 1, 150 cm camera cable, hook magnet, mirror, 32GB microSD card, USB-C cable, 4 x AA battery



THERMAL DETECTOR

GIS 500 PROFESSIONAL

Press and Go - Temperature on Hand



20 pts

Technical Specifications

Part number	0 601 083 480
Laser class	2
Measuring range	-30 °C – +500 °C
Measuring accuracy	± 1.8 °C* (0 to 100 °C)
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 2 x AA battery

GIS 1000 C PROFESSIONAL

All-round Thermo Detector for Precise and Versatile Measurements



Accessories

- AA 1
- 12 V Li-Ion
- 10.8 V Li-Ion

180 pts

Technical Specifications

Part number	0 601 083 3K1
Laser class	2
Measuring range	-40 °C – +1000 °C
Measuring accuracy	± 1.0 °C* (0 to 100 °C)
Measuring accuracy (relative humidity)	± 2 %
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.6 kg
Scope of delivery	Carrying bag, AA 1, micro-USB cable, 4 x AA battery

GTC 400 C PROFESSIONAL

Detailed Visualization of Temperature Differences



750 pts

Accessories

- AA 1
- 12 V Li-Ion
- USB-Li-Ion

Technical Specifications

Part number	0 601 083 150
Measuring range	-10 °C – +400 °C
Measuring accuracy	± 3.0 °C* (0 to 100 °C)
No. of measuring points	19,200
Field of view (FOV)	53 x 43°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.5 kg
Scope of delivery	Carrying bag, AA 1, hand strap, micro-USB cable, 4 x AA battery

GTC 600 C PROFESSIONAL

Advanced Visualisation of Temperature Differences with Smart Documentation



800 pts

Accessories

- 12 V Li-Ion
- 10.8 V Li-Ion

Technical Specifications

Part number	0 601 083 5K1
Measuring range	-20 °C – +600 °C
Measuring accuracy	± 2.0 °C* (0 to 100 °C)
No. of measuring points	49,152
Field of view (FOV)	45 x 35°
Power supply	12 V Li-Ion / 10.8 V Li-Ion
Weight	0.5 kg
Scope of delivery	Carrying bag, USB-C cable



WALLSCANNER

GMS 120-27 PROFESSIONAL

Clear and Simple that Makes Invisible Visible



40 pts

Technical Specifications

Part number	0 601 081 7K0
Max. detection depth	120 mm
Detection materials	magnetic metal, non-magnetic metal, live wire, wooden stud
Power supply	BA 3.7V 1.0Ah A Li-Ion / 2 x 1.5 V LR6 (AA)
Weight	0.3 kg
Scope of delivery	Carrying pouch, 2 x AA battery

D-Tect 120 PROFESSIONAL

Spot On All Common Objects



120 pts








Technical Specifications

Part number	0 601 081 3K0
Max. detection depth	120 mm
Detection materials	metal, cable, water-filled plastic pipe, stud
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.5 kg
Scope of delivery	Carrying bag, AA 1, 4 x AA battery



ACCESSORIES PAGE

Laser Receiver / Remote Control	Part number	Working range	Accuracy	Power supply	Weight	Suitable for	
	LR 5	0 601 069 700	0 – 40 m	± 1 mm	1 x 9 V 6LR61	0.1 kg	GLL 5-40 E, GLL 8-40 E
	LR 6	0 601 069 G80	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR03 (AAA)	0.1 kg	GLL 5-50 X, GLL 3-80
	LR 7	0 601 069 H00	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR6 (AA)	0.2 kg	GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GCL 2-50 CG
	LR 45	0 601 069 L00	up to 300 m	±1mm/±2mm/ ±3mm/±5mm/ ±7mm/±10mm	2 x 1.5 V LR6 (AA)	0.3 kg	GRL 300 HVG, GRL 350 HV, GRL 400 H
	Receiver Mounting Bracket	1 608 M00 70F	nil.	nil.	nil.	0.1 kg	LR 1, LR 1 G
	Receiver Mounting Bracket	1 608 M00 C1L	nil.	nil.	nil.	0.1 kg	LR 6, LR 7
	RC 2	0 601 069 C00	up to 20 m	nil.	1 x 1.5 V LR6 (AA)	0.1 kg	RM 3
	RM 3	0 601 092 800	nil.	nil.	nil.	0.5 kg	GCL 2-50 CG
	BM 1	0 601 015 A01	nil.	nil.	nil.	0.5 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG
	BA 3.7V 1.0 Ah	1 608 M00 C5D	nil.	nil.	nil.	0.1 kg	GLM 50-23 G, GLM 50-27 CG
	AA 1 Battery Adaptator	1 608 M00 C18	nil.	nil.	nil.	0.1 kg	GCL 2-50 CG, GLL 3-80 CG, GIS 1000 C, GTC 400 C, D-tect 120, D-tect 200 C, GIC 120 C

Tripod		Part number	Working range	Tripod thread	Section	Weight	Suitable for
	BT 150	0 601 096 B00	55 – 157 cm	1/4"	nil.	1.3 kg	GLM 400, GLM 500, GLM 50-23 G, GLM 50-27 CG, GLM 100-25 C, GLM 150-27 C, GLM 150 C, GPL 3 G, GPL 5 G, GCL 2-15 G, GCL 2-50 CG, GLL 1 P, GLL 30 G, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 150-5/8"	0 601 096 C80	55 – 157 cm	5/8"	nil.	1.1 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-15 X, GLL 5-50 X, GLL 5-40 E, GLL 8-40 E, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 160	0 601 091 200	97 – 160 cm	5/8"	nil.	4.1 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 170 HD	0 601 091 300	107 – 165 cm	5/8"	nil.	5.5 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 300 HD	0 601 091 A00	122 – 295 cm	5/8"	nil.	7.2 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 350	0 601 015 B00	140 – 350 cm	nil.	3	2.5 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG
	GR 240	0 601 094 100	2.4 m	nil.	2	1.4 kg	GOL 26 D, GOL 32 D, GCL 2-50 CG, GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	GR 500	0 601 094 300	5.0 m	nil.	5	2.0 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV



BOSCH



PRO GARDEN

Cordless Hedgecutter

GHE 18V-60
(0 600 8C9 000)



Capacity

Battery Voltage	: 18.0 V
Blade Length	: 60 cm
Tooth Opening	: 23mm
Packing Dimension (W x L x H)	: 268 x 1199 x 210 mm
Cutting Speed*	: 1,500 rpm
Stroke rate at no load nominal	: 3,000 spm
Weight excl. Battery	: 3 kg



Cordless Blower

GBL 18V-750
(0 600 8D2 000)



Capacity

Battery Voltage	: 18.0 V
Max. air speed	: 198 km/h
Max airflow	: 780 m ³ /h
Weight excl. battery*	: 2.8 kg
Packing Dimension (W x L x H)	: 254 x 510 x 325mm



Cordless Grass Trimmer

GRT 18V-33
(0 600 8D0 000)



Replacement Line;
24m, 2.4mm
(F 016 800 628)



Capacity

Cutting System	: Pro Tap
Battery Voltage	: 18.0 V
Packing Dimension (W x L x H)	: 220 x 1625 x 136 mm
Cutting Diameter Line	: 33 cm
Line Diameter	: 2.4 mm
Main Handle Type	: D-Shape
Weight excl. Battery	: 3.5 kg
Speed Output no-load	: 4500 - 6400 rpm

Cordless Brushcutter

GFR 18V-23
(0 600 8D1 000)



Replacement Line;
24m, 2.4mm
(F 016 800 628)



Brushcutter Blade 23cm
(F 016 800 629)



Brushcutter Blade Set 23cm
(F 016 800 631)



Capacity

Cutting System	: 3-tooth blade, Pro Tap
Battery Voltage	: 18.0 V
Packing Dimension (W x L x H)	: 220 x 1650 x 136 mm
Cutting Diameter Line	: 33 cm
Line Diameter	: 2.4 mm
Weight excl. Battery	: 3.6 kg
Speed Output no-load	: 4500 - 6400 rpm
Cutting Diameter (Blade)	: 23 cm
Blade Thickness	: 2 mm
Diameter Bore Hole	: 25.4 mm



BOSCH

OUTDOOR & GARDEN



EASY



	Easy Aquatak 100 (0 600 800 EL0)	Easy Aquatak 100 Long Lance (0 600 8A7 EL1)	Easy Aquatak 110 (0 600 8A7 FL0)
Pressure (bar)	100	100	110
Flow Rate (l/h)	300	300	330
Motor Power (W)	1,100	1,100	1,300
Max. Pressure (bar)	100	100	110
Max. Temp (°C)	40	40	40
Voltage (V)	220 / 240	220 / 240	220 / 240
Frequency (Hz)	50 / 60	50 / 60	50 / 60
Weight (Kg)	3.0	3.8	3.8
Hose (m)	3	3	3
Self-priming Capable	Yes	Yes	Yes
Accessories Inside Package	- Bosch 360 Gun - High Pressure Detergent Nozzle (350ml) - 3m Hose	- Bosch High Pressure Gun - Lance - High Pressure Hose 3m - Variable fan jet nozzle	- Rotary nozzle - Variable nozzle - High Pressure Detergent Nozzle (450ml) - Water Filter - High Pressure Gun - Lance - High Pressure Hose 3m



UNIVERSAL

ADVANCED (Induction motor)



Universal Aquatak 125 (0 600 8A7 AL0)	Universal Aquatak 130 (0 600 8A7 BL0)	Advanced Aquatak 140 (0 600 8A7 DL0)	Advanced Aquatak 150 (0 600 8A7 7L0)
---	---	--	--

125

130

140

150

360

380

450

500

1,500

1,700

2,100

2,200

125

130

140

150

40

40

40

40

220 / 240

220 / 240

220 / 240

220 / 240

50 / 60

50 / 60

50 / 60

50 / 60

6.8

7.8

17.6

22.5

5

6

8

8

Yes

Yes

Yes

Yes

- Trio nozzle
- Clear New Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 5m

- Trio nozzle
- Rotary nozzle
- Water Filter
- High Pressure Detergent Nozzle (450ml)
- Bosch Gun
- Standard Lance
- High Pressure Hose 6m Length

- High Pressure Detergent Nozzle (550ml)
- Water Filter
- Bosch Gun
- Variable Fan Jet
- Rotatory Nozzle
- Standard Lance
- 8m PU High Pressure Hose

- High Pressure Detergent Nozzle (550ml)
- 60 ° Fixed Fan Jet nozzle
- Variable Fan Jet Lance
- Standard Lance
- Hose 8m (Steel armed)
- Cable 5m
- Bosch Gun
- High Pressure Hose Reel
- Roto Lance



Accessories Kit For BOSCH Easy & Universal Aquatak

Universal x Home & Car Kit (F 016 800 611)

The Car & Home Bundle for your patio and car cleaning



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

90° nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Patio Cleaner

Comfortable and efficient patio cleaning, ideal for larger Patio areas for quicker less time consuming cleaning.

*Not applicable for 360 degree gun (F016 800 536)

Universal x 360° Cleaning Kit (F 016 800 612)

The 360° Bundle for all cleaning needs



Scope of supply



Inside the Box

Usage

Extention hose

Allows wider reach around your home or distance from water / electricity source

Microfibre cloth

For the finishing touch i.e. Polishing car

360° Gun

Ideal for all other task around your home and for your Cars & Bikes, rotating nozzle reaches difficult areas & one handed operation offers more stability with smaller/lighter items i.e wheely bins, garden furniture etc.

Universal x Car Cleaning Kit (F 016 800 572)

The Car Bundle for your car cleaning needs



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

Extention hose

Allows wider reach around your home or distance from water / electricity source

90 degree nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Microfibre cloth

For the finishing touch i.e. Polishing car

*Not applicable for 360 degree gun (F016 800 536)

High Pressure Cleaner Accessories

Rotary Nozzle
(F 016 800 580)



- Aquatak 110, 120, 125, 130 and AQT 42-13



90° Nozzle
(F 016 800 581)



- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X



Trio Nozzle
(F 016 800 583)



- Aquatak 110, 120, 125, 130 and AQT 42-13



Vario Fan Jet Nozzle
(F 016 800 582)



- Aquatak 110, 120, 125, 130 and AQT 42-13



450ml Detergent Nozzle
(F 016 800 509)



- All AQT range



Bosch 360° Gun
(F 016 800 536)



- Aquatak 100, 110, 120, 125, 130



AquaSurf 250 Patio Cleaner
(F 016 800 486)



- Aquatak 110, 120, 125, 130



Suction Nozzle
(F 016 800 356)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Wash Brush
(F 016 800 359)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Water Filter
(F 016 800 577)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Self-Priming Kit (with Filter)
(F 016 800 421)




- All AQT range



Drain Pipe Cleaner 10 m
(F 016 800 362)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

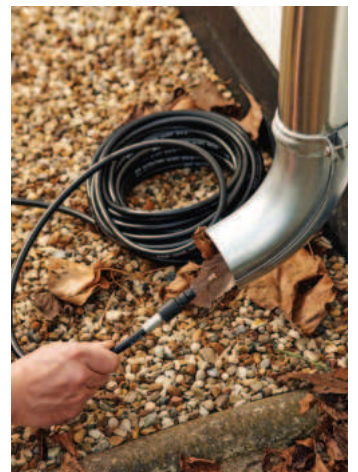

High Pressure Hose 6 m
(F 016 800 360)




- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Extension Hose 6 m
(F 016 800 361)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

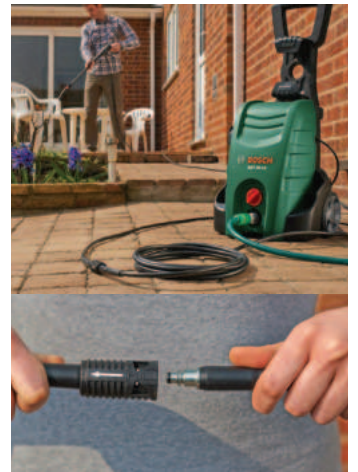

Adaptor for Karcher Accessories
(F 016 800 575)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Hand Push Mower

AHM 38 G
(0 600 886 103)



Capacity	
Min Cutting Height	: 15 mm
Cutting Height	: 15 - 43 mm
Cutting Width	: 38 cm
Blade	: 5 Bladed Cylinder
Roller	: Yes
Self Propelling	: No
Fuel Type	: Hand Push
Product Dimensions (L x W x H)	: 540 x 490 x 380mm
Grass Box Capacity	: 25 Litres
Grass Box P/N	: 0 600 886 160
Weight	: 7.5 kg



Grass Collection Box
(0 600 886 160)



Lawn Mower

Rotak 32-12 (Corded)
(0 600 8A6 078)



Capacity	
Motor	: Powerdrive
Motor Power	: 1.200 W
Torque	: 13 Nm
Cutting Height	: 20 – 60 mm; 3-fold
Grass Combs	: Yes
Grass Box Capacity	: 31 L
Handle Type	: Standard
Integrated carrying handles	: No
Cutting System	: Rotary Blade
Power Cable	: 10m
Blade Width	: 32 cm
Blade P/N	: F 016 800 340
Weight	: 6.8 kg



Replacement Blade for Rotak 32-12
(F 016 800 340)



Grass Trimmer

Easy GrassCut 23
(0 600 8C1 H71)



Capacity	
Motor Power	: 280 W
Cutting Size	: 23 cm
Cutting System	: Semi-auto Spool
Cutting Speed	: 12.500 rpm
Spool	: 1.6 mm x 4 m
Spool P/N	: F016800569
Weight	: 2.0 kg
Tool Dimensions (L x W x H)	: 790 x 263 x 902mm
Weight Packed	: 2.6 kg



Cutting Spool
(F 016 800 569)



Grass Shear

Easy Shear
(0 600 833 300)



Capacity	
Battery Type	: Lithium-ion
Battery Voltage	: 3.6 V
Works with battery capacity	: 1.5 Ah
No-load runtime	: Up to 40 mins
Battery charge time	: 3 h
Shrub blade length (cm)	: 12 cm
Grass shear width (cm)	: 8 cm
Tooth spacing	: 8 mm
Area cut per battery charge, max	: 22 m ²
Weight (g)	: 530g



Easy Prune

Easy Prune
0 600 8B2 140



Capacity	
Battery Voltage	: 3.6 V
Battery Charge Time	: 3.5 h
Cuts per Battery charge up to	: 450
Weight	: 0.49 kg
Battery Type	: Lithium-Ion
Tool Dimension (length)	: 250 mm
Tool Dimension (height)	: 85 mm
Cutting Capacity up to	: 25 mm
Tool Dimensions (width)	: 31 mm
Cutting System	: Bypass




Garden Hand Tools

Trowel
0 600 8B5 300**Capacity**

Working Width	: 85 mm
Material Thickness	: 2 mm
Total Length	: 337 mm
Dimension	: 34 cm x
(L x W x H)	85 mm x 44 mm
Weight	: 322 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Densely planted beds, borders and containers

**Hand Fork**
0 600 8B5 400**Capacity**

Working Width	: 81 mm
Material Thickness	: 2.5 mm
Total Length	: 320 mm
Dimension	: 32 cm x
(L x W x H)	81 mm x 58 mm
Weight	: 243 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Densely planted beds, borders and containers

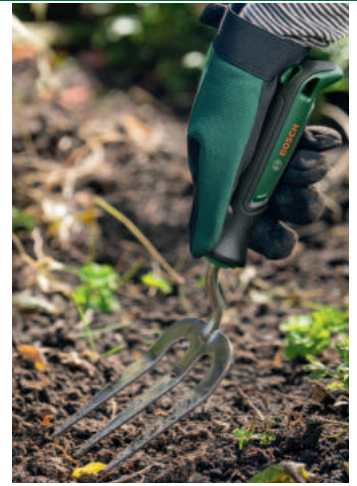**Garden Grubber**
0 600 8B5 500**Capacity**

Working Width	: 71 mm
Material Thickness	: 8.5 mm
Total Length	: 338 mm
Dimension	: 34 cm x
(L x W x H)	71 mm x 85mm
Weight	: 246 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Between growing crops or plants in beds, borders and containers

**Hand Rake**
0 600 8B5 700**Capacity**

Working Width	: 87 mm
Material Thickness	: 2.5 mm
Total Length	: 320 mm
Dimension	: 32 cm x
(L x W x H)	87 mm x 79 mm
Weight	: 249 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Densely planted beds, borders and containers

**Garden Hand Rake**
0 600 8B5 600**Capacity**

Working Width	: 135 mm
Material Thickness	: 1 mm
Total Length	: 380 mm
Dimension	: 38 cm x
(L x W x H)	135 mm x 44 mm
Weight	: 258 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Densely planted beds, borders and containers

**Planting Trowel**
0 600 8B5 800**Capacity**

Working Width	: 80 mm
Material Thickness	: 2 mm
Total Length	: 358 mm
Dimension	: 36 cm x
(L x W x H)	80 mm x 51 mm
Weight	: 305 g
Head Material	: Stainless Steel
Handle Material	: Plastic with soft grip
Working Area	: Densely planted beds, borders and containers



Workbench

PWB 600
0 603 B05 200



Capacity

Weight	: 11.6 kg
Load Bearing capacity, max.:	200 kg
Height of Work bench	: 834 mm
Width of Work bench	: 680 mm
Length of Work bench	: 680 mm

Air Pump


Air pump
0 603 947 080



Capacity

Tool Dimensions (length)	: 49.2 mm
Weight	: 0.43 kg
Max. Output volume	: 10 l/min
Max. Ah	: 3 Ah
Hose Length	: 0.24 m
Max. Pressure	: 10.3 bar
Battery Voltage	: 3.6 V
Tool Dimensions (width)	: 215 mm
Max. Pressure	: 1030 kPa
Tool Dimensions (height)	: 106 mm
Max. Pressure	: 150 psi



=	 5x	2:43
	<small>car tire (225/55 R16) @ 2.0 Bar</small>	
=	 6x	2:08
	<small>trading wheel (28x 1.5 700x30C) @ 4.5 Bar</small>	
=	 38x	0:55
	<small>Football size 5 @ 0.8 Bar</small>	



Hot Glue Gun

PKP 3.6 LI
0 603 264 670



Capacity

Battery Voltage	: 3.6 V
Battery Capacity	: 1.5 AH
Heat-up Time	: 15 sec
Gluing Temperature	: 170°C
Run Time	: up to 6 glue sticks
Tool Dimension (LxWxH)	: 167x52x178mm
Weight	: 0.255 kg



Head Lamp

Head Lamp
1 600 A03 07X



Capacity

Battery	: 3x AAA 1,5V LR03 (Not Included)
Brightness	: 190 lm
Lighting Levels -	: High 190lm, 3 model Low 55lm, Strobe
Illumination type/ distance	: Wide/ H = 28m L = 14m
LED-type	: White COB LED
Lamp Dimensions	: L62mm x W46m
Band Dimensions	: x H42mm
Weight	: 0.058 kg



Cordless Screwdriver

IXO 7
0 603 9E0 050



Capacity	
Battery Voltage	: 3.6 V
Battery Capacity	: 2,0 Ah
B-load Speed	: 235 rpm
Max. torque soft/hard	: 3 / 5.5 Nm
Charging Time	: 3 h
Screw diameter up to	: 5 mm
Tool Dimensions (LxWxH)	: 147x46x120mm
Weight	: 0.320 kg



Angle Screw Adapter
1 600 A00 1Y8



Barbecue Blower Adapter
1 600 A00 1YC



Drilling Adapter
1 600 A00 B9P



Off-Set Angle Adapter
1 600 A00 1YA



Spice Mill Adapter
1 600 A00 1YE




Torque Setting Adapter
1 600 A00 1Y5



Universal Cutting Adapter
1 600 A00 1YF



Corkscrew Adapter
1 600 A00 1YD

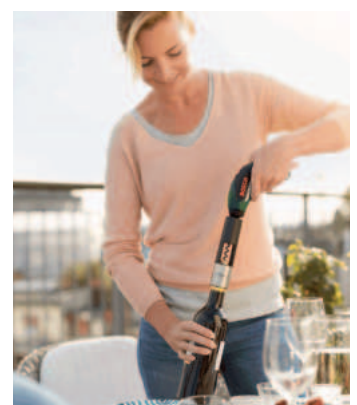

Brush

Power Scrubber Universal Brush
0 603 3E0 050



Capacity

Tool Dimensions (length)	: 140 mm
Weight	: 0.33 kg
No-load Speed	: 215 rpm
Battery Voltage	: 3.6 V
Tool Dimensions (width)	: 45 mm
Tool Dimensions (height)	: 100 mm
IP protection type	: IPX5
Battery Capacity	: 2 Ah



Green kitchen scour pad X3
1 600 A02 3L0



Bristle brush
1 600 A02 3KW



Brown heavy duty pad X3
1 600 A02 3L1



Brush pad holder
1 600 A02 3KX




White melamine eraser X3
1 600 A02 3L2



Brush detailed brush
1 600 A02 3KY



Microfibre non-scratch pad X3
1 600 A02 3KZ

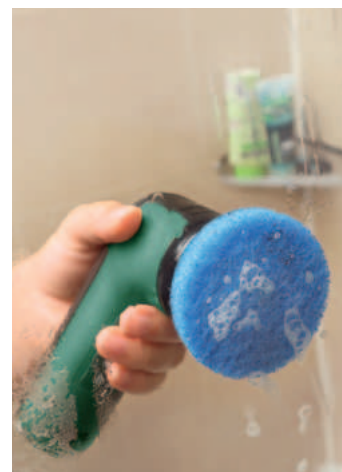



Warranty

This serves to inform you that **all Bosch Power Tools are guaranteed against manufacturing defects for a period of 12 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer, HEAVY DUTY Range Power Tools, Bosch Range Power Tools, Bosch Hot Air Gun, Bosch Batteries and Bosch Charger are entitled to 12 months warranty. Bosch Aquatak High Pressure washer and Garden Tools are entitled to 6 months warranty. Term and Conditions apply**). For the same defect repair within warranty period, a maximum 3 times warranty repair are allowed for Bosch Power Tools, 2 times for Bosch Measuring Tools and Bosch Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. tax invoice or receipt stated with tool's serial no., to Bosch Power Tools Authorised Service Centre.





































Jaminan

Dimaklumkan bahawa tempoh jaminan untuk **Alat-alat kuasa Bosch akibat kecacatan product semasa pengilangan adalah terhad kepada 12 bulan sahaja** bermula dari tarik pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch, Siri HEAVY DUTY Alat-alat Kuasa Bosch, Alat-alat Kuasa Bosch Range, Alat Pengering Bosch, Bateri Bosch dan Pengecap Bateri Bosch Produk tempoh jaminannya 12 bulan. Pembersih tekanan tinggi dan Alat Kebun Tempoh Jaminannya 6 bulan. Tertakluk kepada Terma and Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada 3 kali sahaja untuk Alat-alat kuasa Bosch, 2 kali sahaja untuk Alat-alat Pengukur Bosch dan Alat-alat Kuasa Halaman Bosch. Tempoh jaminan ini tidak termasuk kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan tax invois rasmi atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke Pusat Servis Alat-alat Kuasa Bosch Yang Sah.


保证


谨此通知，有关所有博世电动工具享有为期12个月之生产损坏保证，有效期由购买登记日算起（博世测量仪器，博世GHP 高压清洗机系列，博世 HEAVY DUTY系列产品，博世系列电动工具，博世热风机，博世电池及博世充电器享有12个月保证。高压清洗机和园林工具享有6个月保证。须符合条规）。在维修保证期间，博世电动工具享有高达三次维修服务，而博世测量仪器及博世家园电动工具则享有两次维修服务。上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及交换或其他方式所造成的损坏及故障。若有任何投诉，请将阁下完整的电功工具和购买税务发票或付款收据及具备电功工具编号交到您的博世电动工具授权维修中心。


Key To Symbols

 Electronic Control	 Rotation Stop	 Constant Electronic	 Forward / Reverse Rotation	 Overload Clutch	 Slim Grip	 Inox For a perfect finish on stainless steel
 Spindle Lock	 Saw Blade Pendulum Action	 Dust Extraction	 Bosch SDS System	 SDS-Plus Tool Holder	 Fine Depth Adjustment	 Distortion-resistant protective guard
 SDS-Max Tool Holder	 SDS-Plus Quick Exchange System	 Bosch SDS SDS-Clic Quick Clamping System	 Velcro Fastening	 Easy Fit	 Kick Back Stop	 Turbo Blower
 Removable Cable	 Torque Control	 Restart Protection	 Direct Cooling and Additional Air Inlets	 Brushless EC Motor	 Restart Protection	 Intelligent Brake System
 Drop Control	 Vibration Control	 Auto-Lock	 Woodrazor	 Turbo Power	 Laser Class 2	 Laser Class 3R
						 XLOCK

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

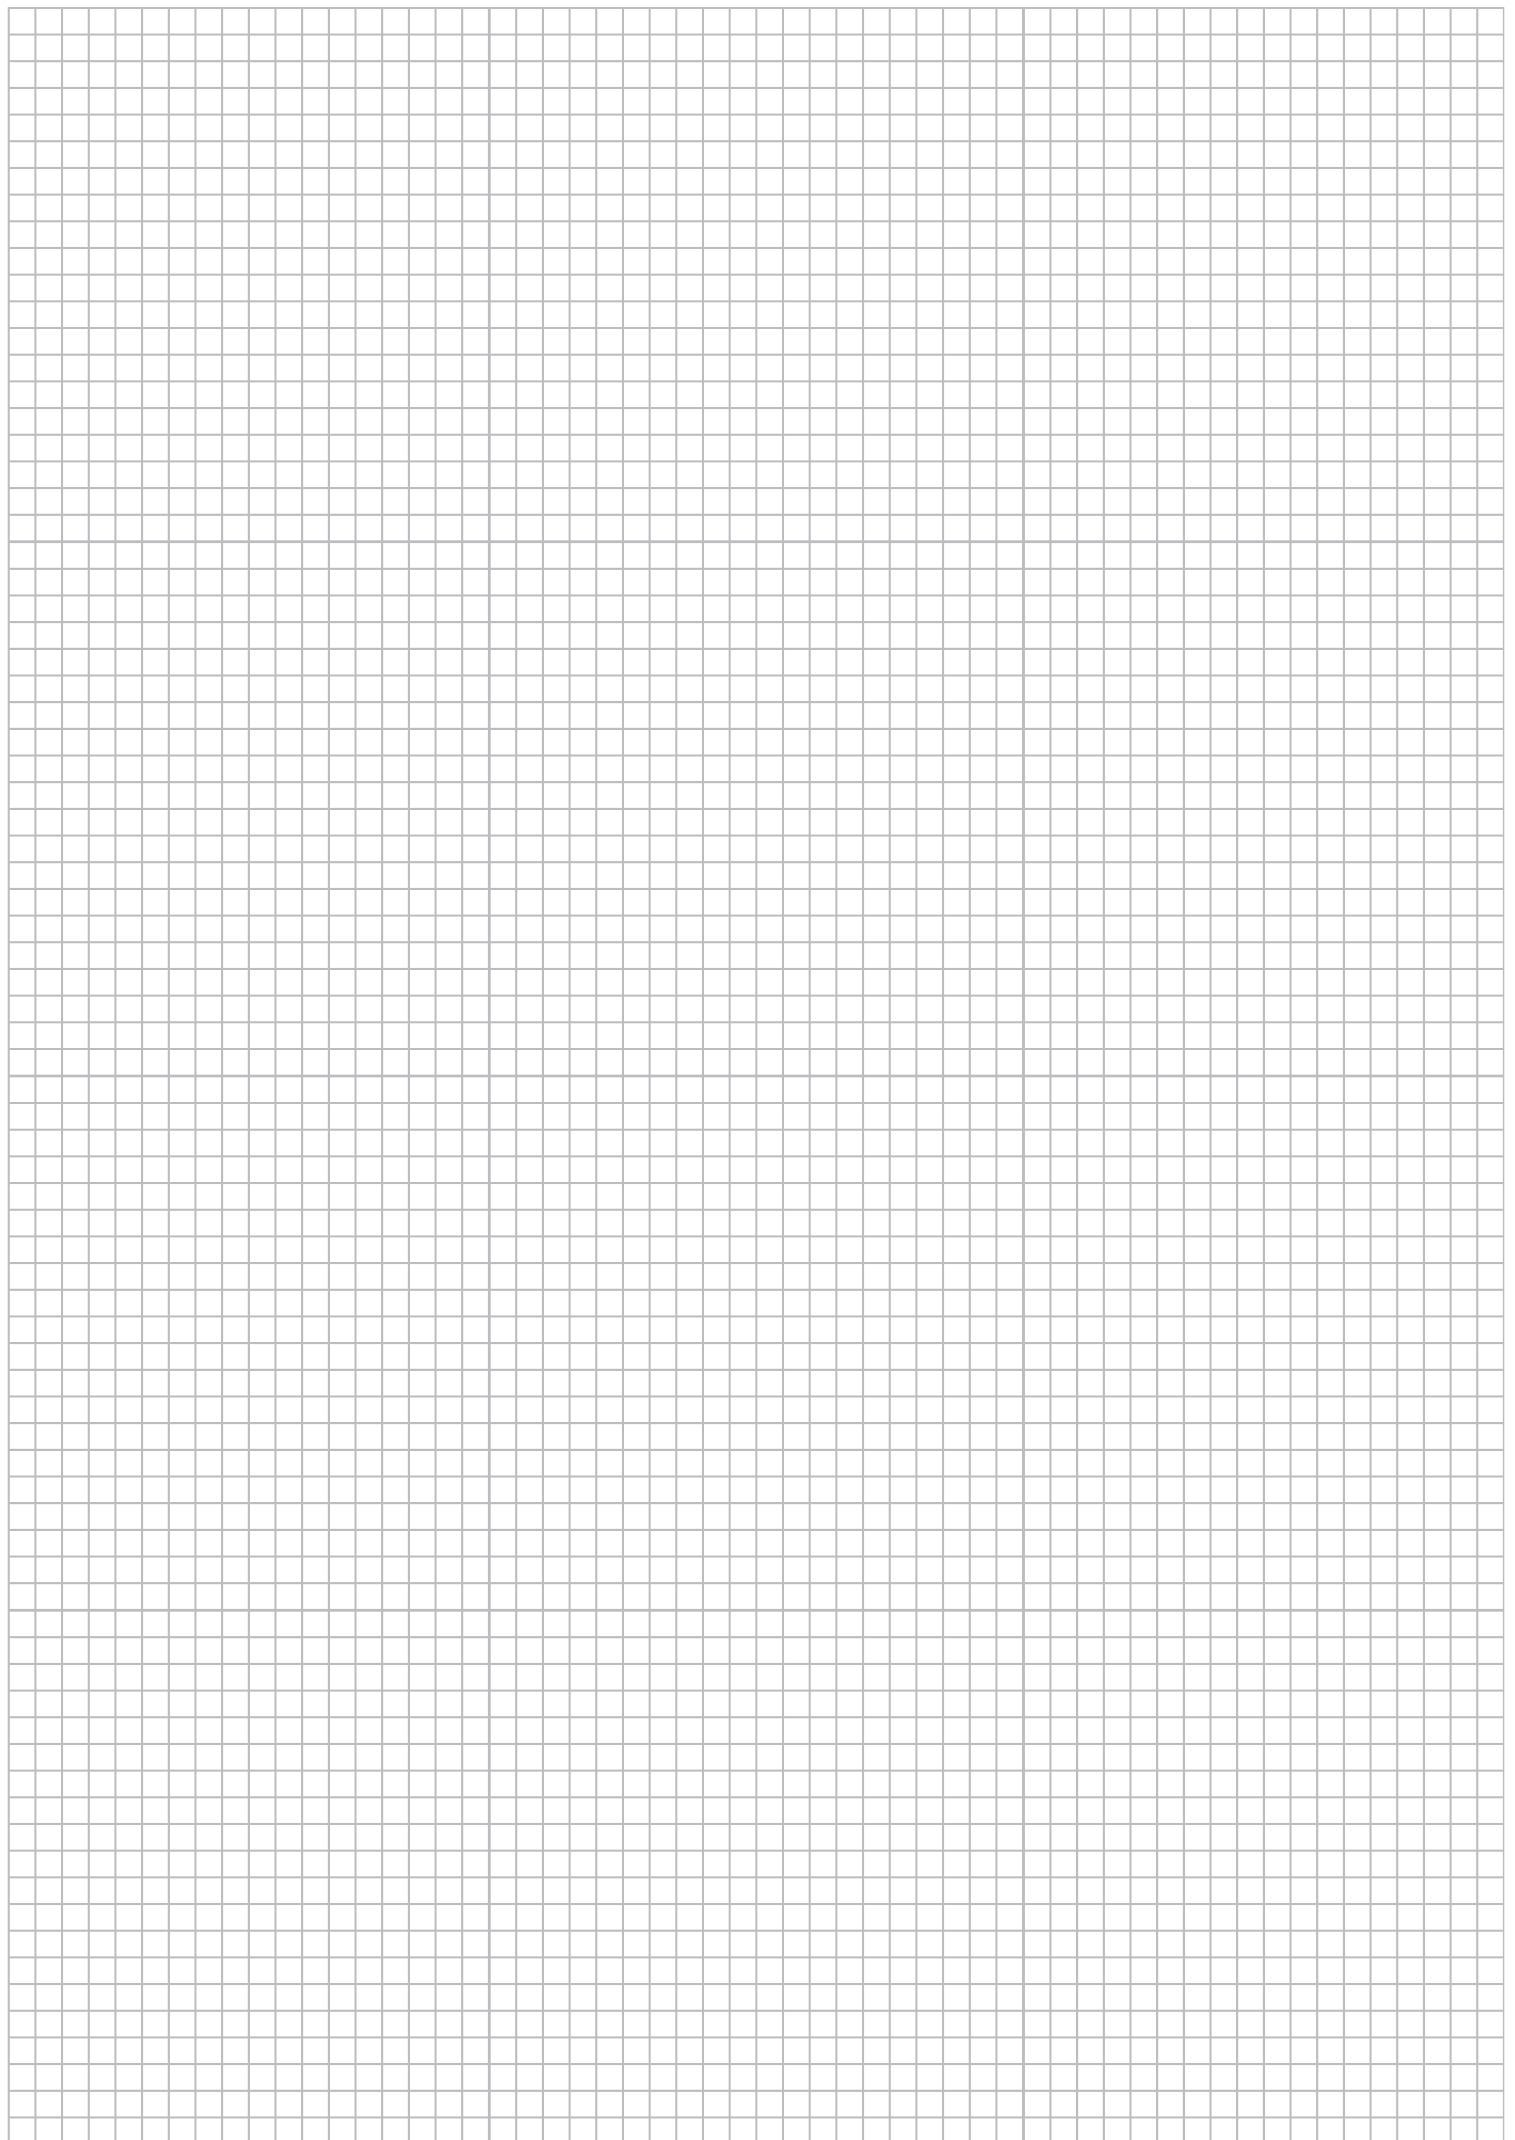


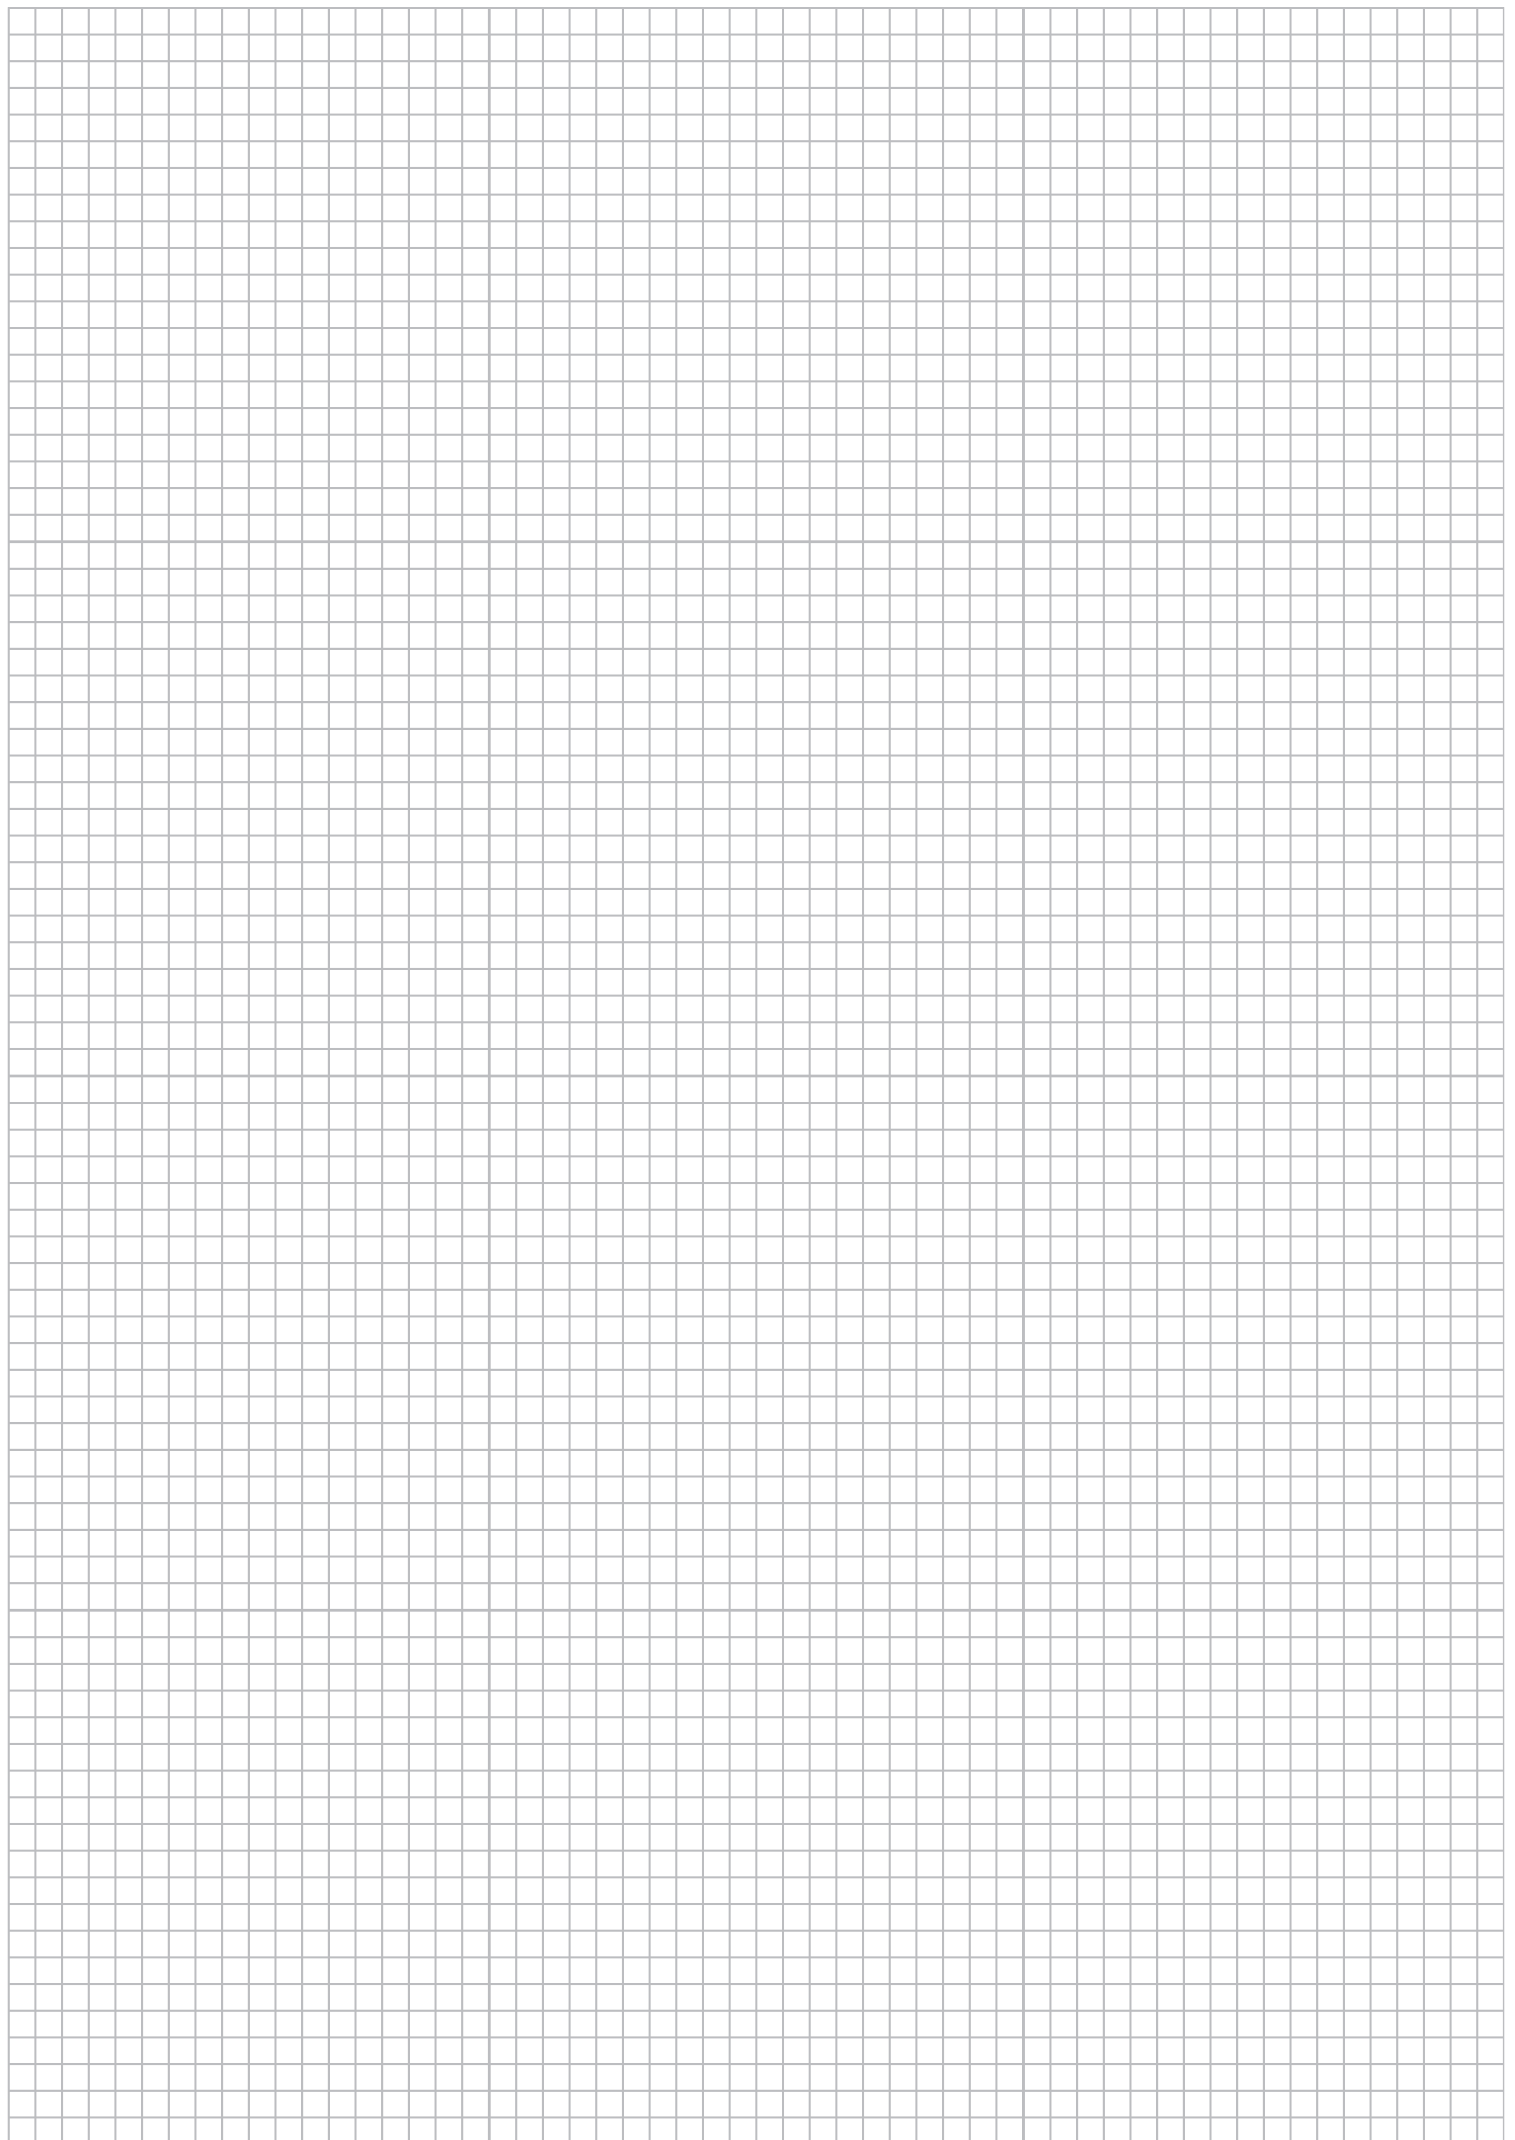

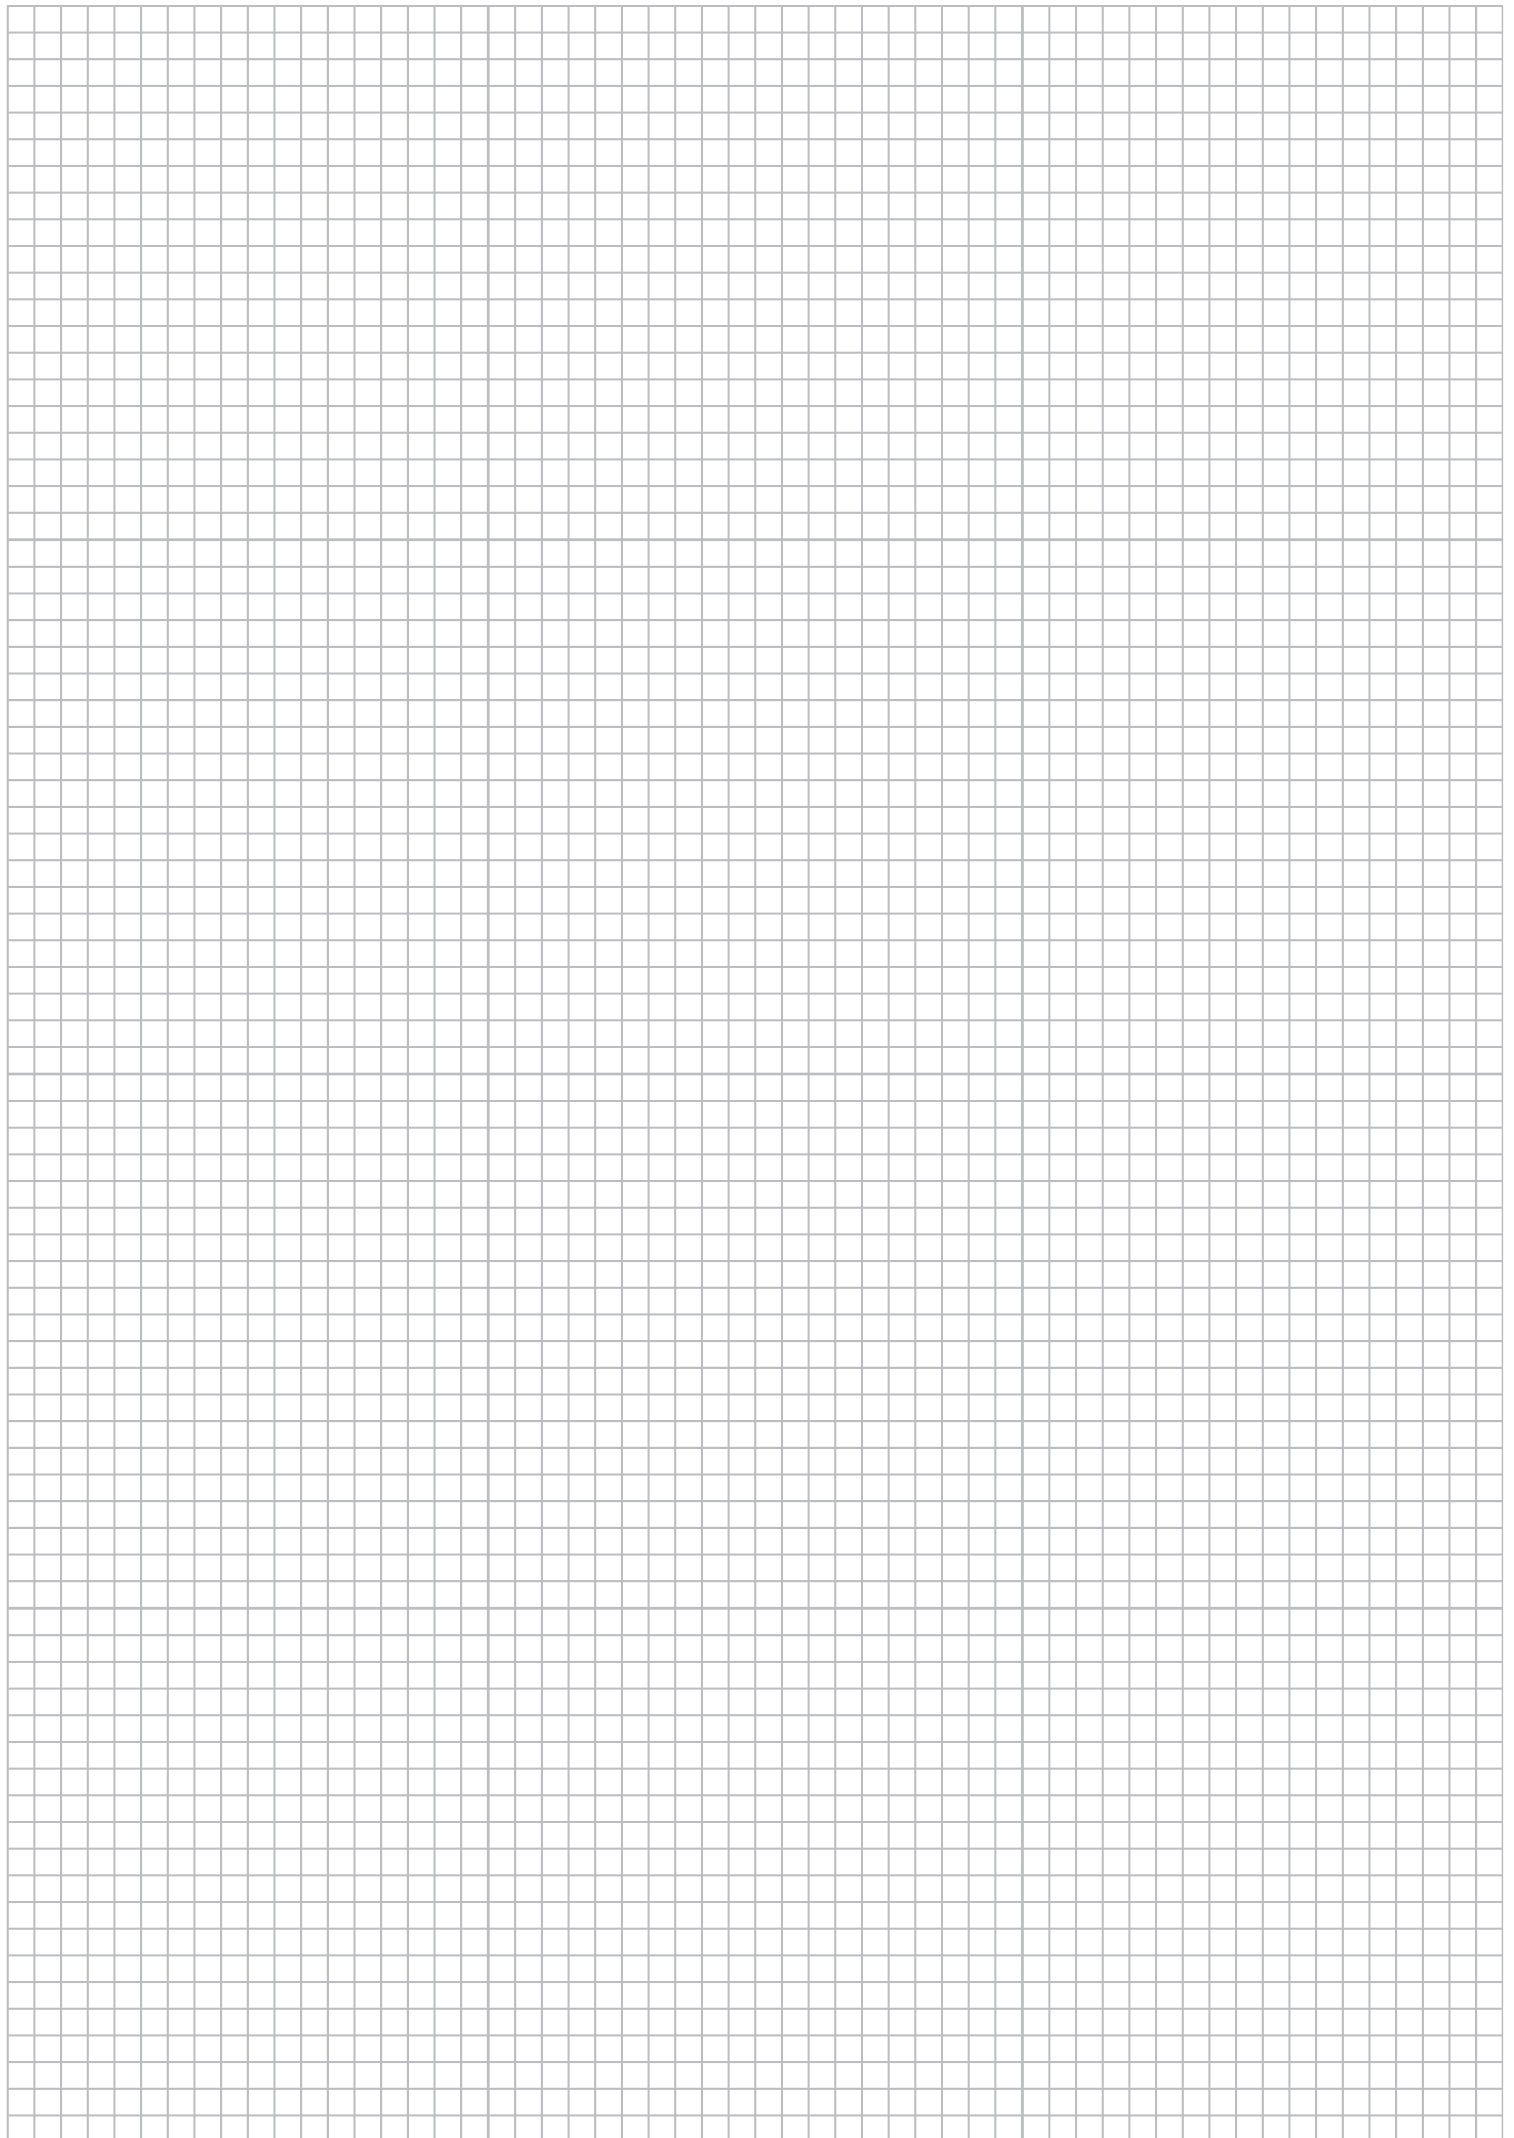



Authorised Service Centres

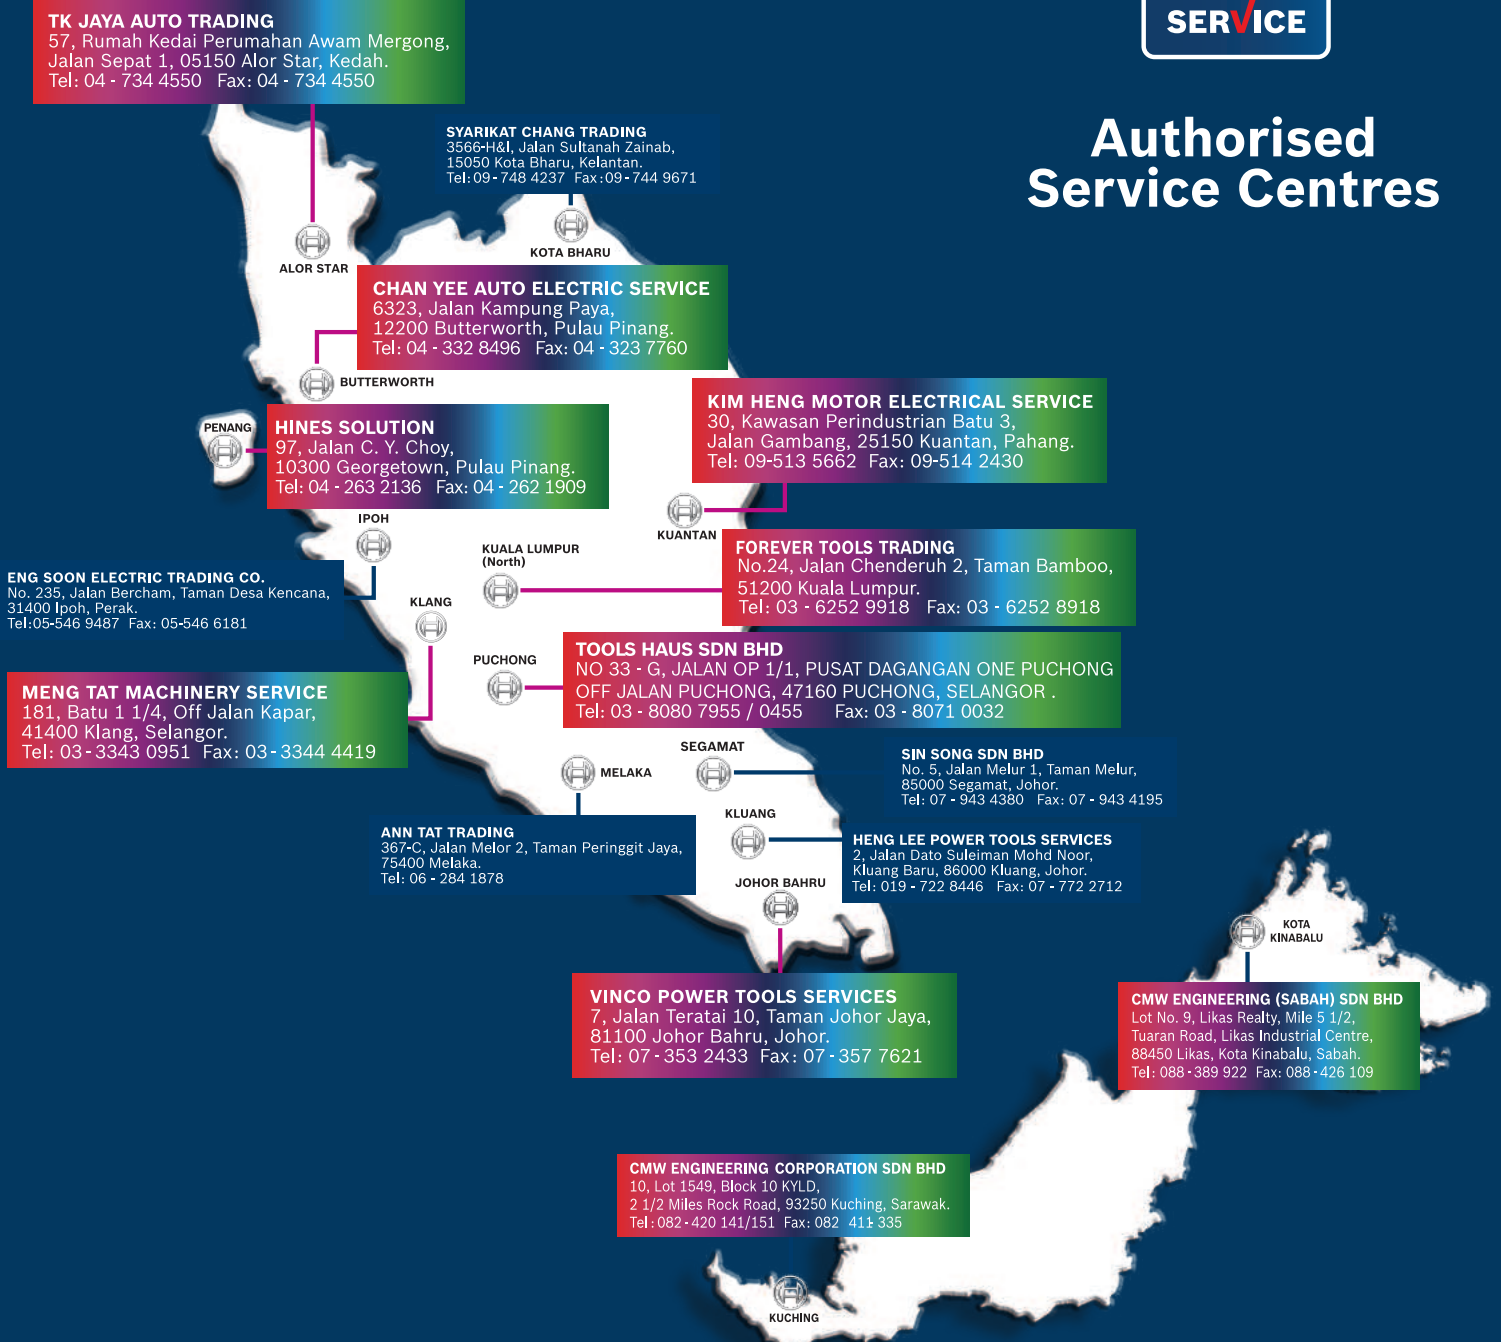

Visit our nearest Authorised Service Centre to service your Bosch Power Tools and to purchase tools spare parts.

Robert Bosch Sdn Bhd (220975-V)

No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.

Tel: +603 - 7966 3000 Fax: +603 - 7958 3838

www.bosch-pt.com.my

 Bosch Service Concept Stores

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

For further enquiries, please contact



Bosch Professional Power Tools and Accessories



Boschptmy



1 800 880 188

Mon - Fri 9am - 6pm