




BOSCH

PROFESSIONAL POWER TOOLS CATALOGUE



Scan here for e-catalogue

August 2023



MOVE AT WILL

Mobility and durability you can trust. Featuring cross-range battery compatibility and a long-lasting brushless motor, the Bosch 18V range lets you move with the confidence of knowing that you have the right tool in your hand, always.

Bosch Professional.



BOSCH

GBH 187-LI One Chuck (0 611 923 1L0)

Live the freedom that your work demands.

NEW!

WHY THIS

- 01 Efficiency Champion**
More efficiency of work by brushless motor and optimizing mechanism for drilling many holes on just one charge
- 02 One Chuck**
A single chuck that can fit both SDS-plus and cylindrical / hex shank drill bits for wide range of applications
- 03 Work-life Secured**
Better production by KickBack Control, Vibration Control and compatible with dust extractor solution

- One Chuck USP**
A single chuck that can fit both SDS-plus and cylindrical / hex drill bits for your wide range of applications
- Efficiency Champion USP**
More holes per battery charge
- Constant Speed**
Motor speed and tool output power remain constant while battery charge is being consumed
- Connectivity & HMI USP**
Enables connection with tools for easy access, customization, maintenance, and device management
- KickBack Control USP**
Intelligent sensor to stop the tool in the event of accidental tool kick back
- Vibration Control**
Design to absorb and evenly distribute vibration to much lower level
- L-Shape Design**
Better weight balance with vertical positioning of motor
- Dust Free Drilling**
Compatible with existing dust solutions

TARGET USERS

- Electrician • Plumber • HVAC • Concrete Core Construction



GBH 187-LI One Chuck	Unit	Specifications
Impact energy	J	2.4
Voltage	V	18
No-load Speed	rpm	0 - 980
Impact rate	bpm	0 - 4,350
Max. drilling Ø concrete	mm	24
Max. drilling Ø steel	mm	13
Max. drilling Ø wood	mm	30
Bare Tool weight	kg	2.9
Working LED	-	Yes
Recommended battery	-	GBA 4.0/5.0/6.0 Ah ProCORE 8.0/12.0 A

270 pts

GBH 185-LI (06119240L1)

Power packed, fully in your control!

NEW!


WHY THIS

- 01 Constant Speed**
More holes drilled per battery charge and stable power output, due to its powerful 18V brushless motor with constant speed
- 02 Safety In Control**
Enhanced safety against accidental jams and reduced vibration exposure due to KickBack Control and Vibration Control
- 03 Dust In Control**
Dust-free work condition by working along with GDE 12 extractor

- Constant Speed SP**
More holes per battery charge and continuous power output, due to Bosch 18V brushless motor with constant speed
- Vibration Control SP**
Minimized vibration effects with the help of Vibration Control
- Trigger in Drilling Axis SP**
Easy handling via ergonomic compact design with trigger and drilling axis alignment
- Dust Free Drilling USP**
Compatible with Auto Power GDE 12 dust extraction attachment, for Dust-free drilling experience
- KickBack Control USP**
Injury prevention through kickback control, which automatically halts tool operation

TARGET USERS

- Electrician • Cabinet Installer & Carpenter • HVAC

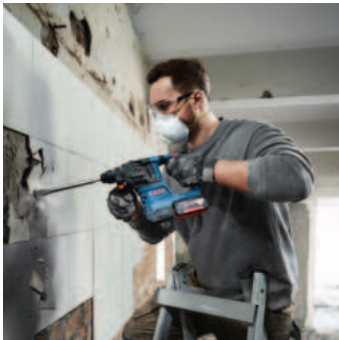

GDE 12 Cordless Dust Extractor (1600A02BW0)



Capacity	
Voltage	: 18 V
Working Modes	: Hammer drill only
Dust Collection Material	: Concrete only
Compatible with	: GBH 185-LI
Drilling Diameter	: 4 - 12 mm
Maximum Drilling Depth	: 100 mm
Max. Drill bit Length	: 165 mm
Weight	: 1.1 kg

GBH 185-LI	Unit	Specifications
Voltage	V	18
Working modes	-	Drill / Hammer drill / Chisel
Impact energy	J	1.9
No-load speed	rpm	0 - 1,050
Impact rate	bpm	0 - 4,675
Drilling Ø in concrete	mm	4-22
Max. drilling Ø in steel	mm	13
Max. drilling Ø in wood	mm	20
Bare tool weight with aux. handle	kg	2.3
Working LED	-	Yes
Recommended battery	-	GBA 18V ≥4.0 Ah

200 pts

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Miter Saw, Table Saw
Planes, Sander, Polisher, Hot Air Gun, Router, Clevis Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

18 V Li-Ion Bosch Professional

**GSR 185-LI
Cordless Drill /Driver
(0 601 9K3 0L2)**

70 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 162 mm
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Torque (Hard/Soft)	: 50 / 21 Nm
Max. Screw Diameter	: 10mm
Max. Drilling (Wood/Metal)	: 35 / 10 mm
Chuck Material	: Metal
Weight	: 1.3 kg

**GSB 185-LI
Cordless Impact Drill
(0 601 9K3 1L2)**

80 pts

Capacity	
Battery Voltage	: 18 V
Head Length	: 177 mm
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Torque (Hard/Soft)	: 50 / 21 Nm
Max. Screw Diameter	: 10mm
Max. Drilling (Wood/Metal/Masonry)	: 35 / 10 / 10 mm
Chuck Material	: Metal
Weight	: 1.3 kg

**GSB 180-LI
Cordless Impact Drill
(0 601 9F8 3L2)**

80 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0 - 500 / 1,900 rpm
Max. Impact Rate	: 27,000 bpm
Torque (Hard/Soft)	: 54 / 21 Nm
Max. Screw Diameter	: 10 mm
Max. Drilling (Wood/Metal/Masonry)	: 35 / 10 / 10 mm
Chuck Size	: 13 mm
Weight	: 1.4 kg

GDR 180-LI Solo
Cordless Impact Driver
(0 601 9G5 1C0)**

40 pts

Capacity	
Battery Voltage	: 18 V
Impact Force	: 0 - 3,600 bpm
No-load Speed	: 0 - 2,800 rpm
Max. Torque	: 160 Nm
Head Length	: 150 mm
Dim. Length/Height	: 153/234 mm
Bit Holder/Shank	: 1/4" Hex
Weight (w/2.0Ah)	: 1.4 kg

**GBH 180-LI
Cordless Hammer
(0 611 911 1L2)**

180 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Impact Force	: 2.0 J
Drilling Capacity	: 20mm
No-load Speed	: 0 - 1,800 rpm
Impact rate	: 0 - 5,100 bpm
Charger	: GAL 18 V-40 CV
Charging Time	: 60 mins
Weight (bare tool)	: 2.3 kg

**GWS 180-LI
Cordless Angle Grinder
(0 601 9H9 0L1)**

180 pts

Capacity	
Battery Voltage	: 18 V
Spindle	: M10
No-load Speed	: 11,000 rpm
Disc size	: 100 mm
Weight (bare tool)	: 1.4 kg

**GDH 180-LI
Cordless Impact Wrench / Driver
(0 601 9G5 2L0)**

100 pts

Capacity	
Battery Voltage	: 18 V / 2.0 Ah
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,600 bpm
Max Torque	: 180 Nm
Head Length	: 170 mm
Dimensions Length/Height	: 171 / 234 mm
Motor	: DC
Bit Holder/Shank	: 1/4" Hex; 1/2" Square
LED light	: Yes - above trigger

**GDS 250-LI
Cordless Impact Wrench
(0 601 9G6 1L0)**

120 pts

Capacity	
Battery Voltage	: 18 V / 4.0 Ah
Charger	: GAL 18 V-40 CV
Max Torque	: 250 Nm
No-load Speed	: 0 - 2,400 rpm
Impact Rate	: 0 - 3,300 bpm
Tool Holder	: 1/2" Square (Pin Hole + Retention Ring)
Screw Size	: M10 - M18

GLI 180-LI Solo
Cordless Jobsite Light
(0 601 4A1 1L0)**

20 pts

Capacity	
Voltage	: 18 V
Brightness in Lumen	: 300 Lm
No. of LED	: 6 Qnt
Runtime	: 300 min / Ah
Dimensions	: 116 x 78 x 163 mm
Weight	: 0.30 kg

GST 185-LI Solo
Cordless Jigsaw
(0 601 5B3 0L3)**

100 pts

Capacity	
Battery Voltage	: 18 V
Stroke rate Bow Handle	: 0 - 3,500 spm
Stroke Length	: 26 mm
Cutting Depth	: 125 mm
Bladeholder	: SDS
Bevel Angle	: -45 - 45°
Weight incl. 4.0 battery	: 2.6 kg

GKS 185-LI Solo
Cordless Circular Saw
(0 601 6C1 2L1)**

120 pts

Capacity	
Battery Voltage	: 18 V
Blade size / Bore size	: 165 / 20 mm
No-load Speed	: 5,000 rpm
Cutting depth, 0° / 45°	: 57 / 41 mm
Bevel Capacity Max.	: 50°
LED Work area illumination	: Yes
Weight solo	: 2.8 kg

GEX 185-LI Solo
Random Orbit Sander
(0 601 3A5 080)**

70 pts

Capacity	
Battery Voltage	: 18 V
Motor type	: EC
No-load Speed	: 6,000 - 10,000 rpm/min
Sanding Sheet Diameter	: 125 mm
Sanding Stroke	: 2.5 mm
Vibration	: 2.2 m/s ²
Weight (bare tool)	: 0.93 kg

GTB 185-LI Solo
Cordless Drywall Screwdriver
(0 601 9K7 0L1)**

100 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 0 - 4,500 rpm/min
Max Size	: Ø6 self drilling
Soft Torque	: 5.2 Nm
Weight w/o battery	: 0.95 kg

**GMA 55
Attachment of GTB 185
(1 600 A02 5GJ)**

Capacity	
Screw Diameter Max.	: 5 mm
Accepted Screw Length	: 25 - 55 mm
Accepted Belt Width	: 15.7 - 16 mm
Weight	: 0.36 kg
Length x Height x Width	: 201 x 121 x 62.5 mm

GSA 185-LI Solo
Cordless Reciprocating Saw
(0 601 6C0 0L1)**

120 pts

Capacity	
Battery Voltage	: 18 V
No-load Stroke rate	: 0 - 2,900min ⁻¹
Stroke Length	: 28 mm
Weight w/o battery	: 3.2 kg
Cuting Depth	
-Wood	: 230 mm
-Metal profile & Pipes	: 150 mm

GOP 185-LI Solo
Cordless Multi-Cutter
(0 601 8G2 080)**

110 pts

Capacity	
Battery Voltage	: 18 V
Motor type	: Brushless
No-load Speed	: 10,000 - 20,000 rpm
Oscillating Angle (degree)	: 3.4
Starlock Type	: Starlock Plus
Quick Change	: SDS Snap in
Vibration plunge cut wood	: 3.4 m/s ²
Weight w/o battery	: 1.2 kg

GSR/GSB 18V-90 C Solo** (0 601 9K6 0L0 / 0 601 9K6 1L0)

Compact head length and perfect tool control

HEAVY DUTY

NEW!

WHY THIS

- 01 **Powerful Brushless Motor**
Which delivers high power with 64 Nm and 2,100 rpm maximizing your efficiency on the job site
- 02 **Switchable Kickback Control**
Which reduces the risk of sudden rotational torque reaction and therefore offers perfect tool control at any time
- 03 **Switchable Precision Clutch**
Stops the overriding once a set torque level is reached and therefore, reduces the wear and tear of the clutch and the resulting noise

Powerful Brushless Motor

Which delivers unrivalled power with 64 Nm and 2,100 rpm maximizing your efficiency on the job site

Switchable Precision Clutch via User Interface ^{USP}

Stops the overriding once a set torque level is reached and therefore, reduces the wear and tear of the clutch and the resulting noise

Switchable Kickback Control via User Interface ^{USP}

Which reduces the risk of sudden rotational torque reaction and therefore offers perfect tool control at any time



Precise Screw Driving

Engaging a clutch with 20 precision torque settings

Extremely Robust

13 mm Röhm metal chuck and metal gearbox for fast drilling and driving applications

Individual Tool Settings

Due to connectivity interface for easy change of tool parameters

Strong and Compact

Brushless motor which delivers top performance with 64 / 36 Nm and compact head length of 163 mm(GSR) / 175 mm(GSB) to make tough work easier

TARGET USERS

• Cabinet Installer • Property Manager • Elec. Residential • Plumber • HVAC



GSR/GSB 18V-90 C Solo**	Unit	Specifications
Rated voltage	V	18
Battery capacity	Ah	4.0 ProCore
No-load speed	rpm	0 - 630 / 0 - 2,100
Impact rate	bpm	- / 0 - 29,500
Max. torque (hard/soft)	Nm	64 / 36
Chuck capacity	mm	13
Max. screw / drilling diameter	mm	12 / 68
Head length	mm	163 / 175

90 pts

GWS 18V-10 P Solo** (0 601 9J4 1K0)

Cordless angle grinder

HEAVY DUTY

NEW!

WHY THIS

- 01 **Highest user safety with paddle switch**
- 02 **Industrial Power & performance**
- 03 **Comfortable & convenient whilst working**

Ease Of Use

Slim grip size & anti-vibration handle for comfortable handling & lower fatigue. Keyless guard and quick clamping nuts for convenient usage

Highest User Safety ^{USP}

KickBack control, Drop control, Intelligent brake system, Restart Protection, PROtection switch



SP

Industrial Power & Performance

1000W cored equivalent power and optimized performance with ProCore 8.0 batt. Longer runtime per batt. charge & higher cutting efficiency thanks to Brushless motor




Protection Switch

Paddle switch for immediate shutdown when releasing the trigger.

TARGET USERS

• HVAC • Electricity Supply / Electrical Lineman

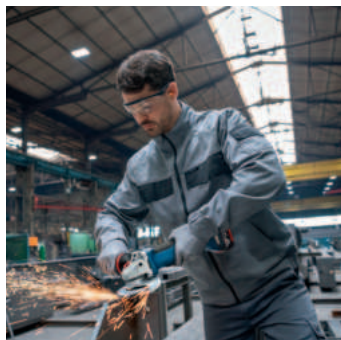

GWS 18V-10 P Solo**	Unit	Specifications
Voltage	V	18
No-load speed	rpm	9,000
Disc diameter	mm	100
Spindle size	-	M10 & M14
Weight w/o battery	kg	1.8 / 1.9
Grip size	mm	160

100 pts

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless
18V BITURBO
12V Cordless
Battery, Charger, L-BOXX, Trolley, Roller
Drill, Impact Drill, Multi Cutter, Foam Cutter, Mixer Drill
Straight Grinder, Angle Grinder, Bench Grinder
Diamond Cutter, Reciprocating Saw, Shear, Nibbler
Jigsaw, Circular Saw
Cut Off Machine, Mitre Saw, Table Saw
Planner, Sander, Polisher, Hot Air Gun, Reamer, Cle Gun, Blower, Vacuum
Rotary Hammer, Demolition Hammer

18 V Li-Ion Bosch Heavy Duty

GSR 18V-50 Cordless Drill / Driver (0 601 9H5 0L0)

HEAVY DUTY



120 pts



Capacity	
Battery Voltage	: 18 V / 2.0 Ah
Max. Torque (hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
Max. Screw	: 10mm
Charger	: GAL 18V-40 CV
Charging Time	: 40 mins

GSB 18V-50 Cordless Impact Drill (0 601 9H5 1L0)

HEAVY DUTY



120 pts



Capacity	
Battery Voltage	: 18 V
Max. Torque (hard/soft)	: 50 / 28 Nm
Chunk Type	: Metal
No-load speed	: 0-460 / 0-1,800 rpm
Drilling Dia.: In Steel	: 13mm
In Wood	: 35mm
In Masonry	: 13mm
Max. Screw	: 10mm
Charger	: GAL 18V-40 CV
Charging Time	: 40 mins

GSR 18V-60 FC Solo** Cordless Drill / Driver (0 601 9G7 1L0)

HEAVY DUTY



150 pts



Capacity	
Battery Capacity	: 18 V
Drilling Dia.: In Steel	: 13mm
In Wood	: 38 mm
Max. Torque (hard/soft)	: 60 / 31 Nm
No-load speed	: 0 - 6000 / 1,900 rpm
Weight	: 0.9 kg

Due to BeConnected System
**Optional Accessories

GWS 18V-10 Solo** Cordless Angle Grinder (0 601 9J4 0K0)

HEAVY DUTY



100 pts



Capacity	
Battery Voltage	: 18 V
No-Load Speed	: 9000 rpm
Max Output Power	: Equivalent to 1000W corded tool (w/PRoCORE)
Grip Circumference	: 155mm
Disc	: 100mm (M10)
Weight	: 2KG (Tool only)
Charger	: GAL 1880 CV
Charging Time	: 65 mins

GDX 18V-200 C Cordless Impact Wrench / Driver (0 601 9G4 2L0)

HEAVY DUTY



200 pts




Capacity	
Battery Voltage	: 18 V / 4.0Ah
Max. Torque	: 200 Nm
No-load Speed	: 1- 1,100/2,300/3,400 rpm
Impact Rate	: 0- 2,300/3,400/4,200 rpm
Head Length	: 147 mm
Weight (w/o battery)	: 1.17 kg
Bit Holder/Square Drive	: 1/4" Hex 1/2" Square
Charger	: GAL 18V-40CV
Charging Time	: 60 mins

GDS 18V-400 Cordless Impact Wrench (0 601 9K0 0L0)

HEAVY DUTY



180 pts



Capacity	
Battery Voltage	: 18 V
Max. Torque	: 400 Nm
No load Speed	: 0 - 2,500rpm
Impact Rate	: 0 - 3,700 bpm
Head Length	: 172 mm
Weight (w/o battery)	: 1.25 kg
Weight (w GBA 18V 5.0Ah)	: 1.85 kg



GLI 18V-LI VARILED Solo** Cordless Jobsite Light (0 601 443 400)

HEAVY DUTY



30 pts

Capacity	
Battery Voltage	: 18 V
Luminous Flux	: 420 Lumen
Max. operating time	: 135 mins/Ah
Weight	: 0.3 kg

GLI 18V-1900 Solo** Cordless Light (0 601 446 400)

HEAVY DUTY



70 pts



Capacity	
Battery Voltage	: 18 V
Max. Brightness	: 1900 lm
Dimensions	: 292 x 187 x 69 mm
Runtime	: 100 min / Ah
Weight	: 1.6kg

GSA 18V-LI C Solo** Cordless Sabre Saw (0 601 6A5 080)

HEAVY DUTY



80 pts

Capacity	
Battery Voltage	: 18 V
Stroke Length	: 21 mm
No load Stroke Rate	: 0- 3,050 spm
Cutting Dept In Wood	: 200 mm
in Metal	: 100 mm



GSA 18V-32 Solo** Cordless Sabre Saw (0 601 6A8 108)

HEAVY DUTY



200 pts

Capacity	
Battery Voltage	: 18 V
Stroke Length	: 32 mm
No-load Stroke Rate	: 0 - 2,500 spm
Cutting Depth In Wood	: 230 mm
in Metal	: 175 mm
Weight	: 3.5 kg

GST 18V-LI B Solo** Cordless Jigsaw (0 601 5A6 100)

HEAVY DUTY



120 pts

Capacity	
Battery Voltage	: 18 V
No-load Stroke Rate	: 0 - 2,700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 120 mm
In Aluminium	: 20 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

GKS 18V-57 Solo** Cordless Circular Saw (0 601 6A2 2L0)

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 rpm
Blade Diameter	: 165 mm
Saw Blade Bore Diameter	: 20 mm
Max. Cutting Capacities at 90°	: 57 mm
at 45°	: 39 mm
Weight	: 4.1 kg

GAS 18V-1 Solo** Cordless Vacuum Cleaner (0 601 9C6 2L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
Container Vol.	: 700 ml
Max. Underpressure	: 6 kPa
Max. Airflow	: 10 l/sec
Speeds	: 1 Speed
Runtime	: 7 min / Ah
Weight (w/o batt, w/o AC)	: 1.3 kg

GAS 18V-10L Premium Solo** Cordless Vacuum Cleaner (0 601 9C6 3K0)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 18 V
Max. Vacuum	: 90 mbar
Max. Airflow	: 24 l/sec
Max. Runtime with 6.0 Ah Battery	: 24 min
Dust Class (EU Standard): L-class	
Container Vol, Gross/net:	: 10/6 litre/gallons
Weight	: 4.6 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User has to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GBL 18V-120 Solo**
Cordless Blower
(0 601 9F5 1L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I: 9 min / Ah
	: Speed II: 5 min / Ah
Weight without Cable:	1.1 kg

GSS 18V-LI Solo**
Cordless Orbital Sander
(0 601 9D0 2L0)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11,000 rpm
Orbital Rate	: 22,000min-1
Orbital Diameter	: 1,6 mm
Pad Size	: 113 x 101 mm
Sanding Paper Size	: 114 x 140 mm
Weight	: 1.0 kg

GCB 18V-63 Solo**
Cordless Band Saw
(0 601 2A0 400)

HEAVY DUTY



130 pts

Capacity	
Battery Voltage	: 18 V
Cutting Capacity	: 63.5 x 63.5 mm
Saw Blade	
Dimensions	: 733 x 12.7 x 0.4 mm
No-load Speed	: 162 m/min
Weight without Battery:	3.3 kg

GBH 18V-26 Solo**
Cordless Rotary Hammer
(0 611 909 000)

HEAVY DUTY



160 pts

Capacity	
Battery Voltage	: 18 V
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.6 J
Rated Speed	: 0 - 980 rpm
Impact Rate	: 0 - 4,350 bpm
Weight	: 3.5 kg

GDE 18V-16
Cordless Dust Extractor
(1 600 A00 51M)



Capacity	
Compatible with	: GBH 18V-26 only
Drilling Diameter	: Max. 16 mm
Max. Drilling	: 100 mm
Weight	: 1.2 kg

GRG 18V-16 C Solo**
Cordless Rivet Gun
(0 601 9K5 080)

HEAVY DUTY



430 pts

Capacity	
Battery Voltage	: 18 V
Motor	: Brushless
Pulling Force	: 16,000 N
Stroke Length	: 25 mm
Rivet Diameter	: 3.0 - 6.4 mm
Weight w/o Battery	: 1.6 kg



GHG 18V-50 Solo**
Cordless Heat Gun
(0 601 2A6 580)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 18 V
Heat up Time	: <6 sec (up to 300°C)
Temperature Lvl	: 2 (300/600°C)
Max. Airflow (in l/min)	: 175
Accessories	: Reduction nozzle, Reflection nozzle

GKM 18V-50 Solo** (0 601 6B8 080)

Quick and precise cuts in metal – nearly spark-free

HEAVY DUTY

NEW!

WHY THIS

- 01** Nearly Spark-Free Working
- 02** Accurate Cuts
- 03** Ergonomic Handling

Handling & Ergonomic Design

Optimized ergonomic grip for cutting in all positions with a compact, well-balanced design

Saw Hook

Easy storage solution between cuts



Integrated & Robust Chip Box

Hassle free, integrated chip collection with no need for additional vacuum hose

LED & Viewing Window

High visibility for precise cutting

Steel Baseplate

High durability and accuracy by intuitive cutting line indicator

Standard For Steel Saw Blade

Optimized for cordless saws to maximize battery runtime

TARGET USERS

• Industrial Metal Fabrication • Roofing + Framing



GKM 18V-50 Solo**	Unit	Specifications
Voltage	V	18
Balde size / Bore size	mm	136 / 20
No-load Speed	rpm	4,250
Cutting depth, 90°	mm	50
Weight solo	kg	2.2

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo – Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



BOSCH

BITURBO BRUSHLESS

REVOLUTIONARY PERFORMANCE. FEEL THE EXTREME.



NEW STANDARDS IN PERFORMANCE WITH LESS WEIGHT AND MAXIMUM OOMPH

Maximum Power | Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.

Perfect handling | BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor Tools with two batteries.

Ultimate control | Multiple clever technologies make your work safer, faster and more efficient.

Fully compatible | Compatible with all new and existing Batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

New high-performance motor



Our most powerful battery ever

BITURBO Brushless: Up to 1,800 watts of corded power.

ENGINEERED FOR HIGHEST PERFORMANCE AMONGST 18V SYSTEM

The Professional 18V System combines highest performance with compact dimensions and minimum weight to make your toughest jobs easier. Benefit from the ultimate in performance, uncompromising compatibility and maximum freedom on your job site.

**+87%¹
MORE
POWER**

ProCORE18V: latest cell technology and intelligent battery management.



**Up to +135%²
LONGER
LIFETIME**

COOLPACK 2.0 technology: prevents the battery from overheating.

**Up to +151%³
EXTENDED
RUNTIME**

Excellent battery performance: When other batteries switch off, you just keep working.



**PERFECTLY
ENGINEERED FOR HIGHEST
PERFORMANCE.**

**9 min to 50%⁴
FASTEST
CHARGING**

Get back to work faster than ever thanks to the world charging champion GAL 18V-160 C Professional.





BOSCH

BITURBO BRUSHLESS

EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP

Connect BITURBO Tools with App for Maximum Efficiency & Customization



Compatible with iOS and Android



GCY 42 installed on tool for tool to connect to APP



Bosch ToolBox APP




Connected tools can be found in My Tools within Bosch Toolbox APP

World's First Levelling Function



GSR/B 18V-150 C

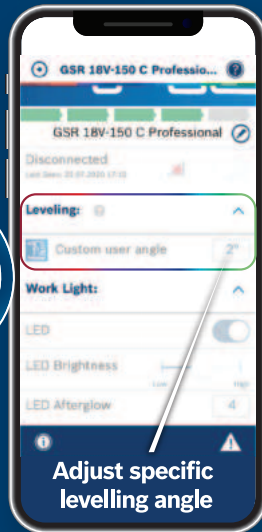


1



2



4




3

Personalized Speed Levels




GCM 18V-305 GDC

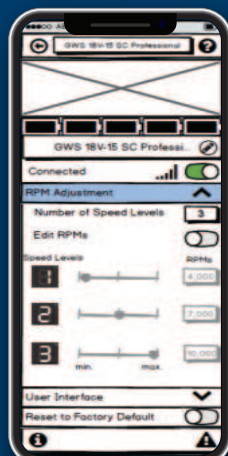

Default Setting



Personalized Setting

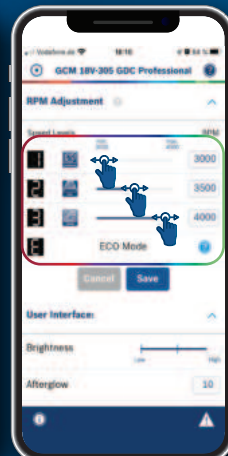

GBH 18V-40 C Solo** (0 611 917 080)

Cordless freedom with corded performance

HEAVY DUTY

NEW!

WHY THIS

- 01** Corded performance
- 02** Optimal power-to-weight ratio
- 03** Minimized hand and arm injuries

Corded Performance USP

BITURBO Brushless technology with ProCORE18V for corded performance providing powerful 9.0 J impact energy



Perfect Tool Control USP

- User Interface for real-time tool status
- Working mode choice via User Interface
- Bluetooth connectivity for personalization via App*
 - Soft start ASC & EPC
 - Lock-on button for continuous operation in chisel mode
- Signal switch for variable rotation speed
- Focused LED working light for improved visibility
- Vibration Control



Minimized Hand and Arm Injuries USP

Kickback Control senses sudden loss of tool control. In case of e.g. a canted drill it instantly shuts the cordless rotary hammer down in order to minimize hand and arm injuries



Optimal Power-to-Weight Ratio USP

An improved impact mechanism and highly capable drive train lead to an optimal power-to-weight ratio

*Bluetooth module is included in AP execution, not in LA and EE execution

TARGET USERS

- HVAC & Plumber
- Electricians
- Concrete Core Construction (General Construction)



580 pts

GBH 18V-40 C Solo**	Unit	Specifications
Impact energy	J	9.0
Drilling diameter	mm	12 - 40
Impact rate drilling / chiseling	bpm	0 - 3,130
Rated tool Speed	pm	0 - 360
Weight w/o battery	kg	7.0

18 V BITURBO BRUSHLESS



GDS 18V-1000 (1/2") Solo** Cordless Impact Wrench (0 601 9J8 3L1)

HEAVY DUTY



130 pts



Capacity	
Battery Voltage	: 18 V
No-Load Speed	: 0-800/1,200/1,750 rpm
Max tightening torque	: 1,000 Nm
Max.Breakaway Torque	: 1,600 Nm
Impact Rate	: 0-1,600/2,400/2,600 bpm
Torque	: 0-350/700/1,000 Nm
Weight w/o battery	: 2.9 kg

GDS 18V-1050 H (3/4") Solo** Cordless Impact Wrench (0 601 9J8 5L1)

HEAVY DUTY



130 pts



Capacity	
Battery Voltage	: 18 V
No-Load Speed	: 0 - 1,750 rpm
Max.Torque	
(1st/2nd/3rd level)	: 350/750/1,050 Nm
Max.Breakaway Torque	: 1,700 Nm
Impact Rate	: 0 - 2,600 bpm

GSR 18V-150C Solo** Cordless Drill/Driver (0 601 9J5 0L0)

HEAVY DUTY



140 pts

Capacity	
Battery Voltage	: 18 V
Torque (soft/hard/max.)	: 84/100/150Nm
No-load speed(1st gear)	: 0 - 550 rpm
(2nd gear)	: 0 - 2,200 rpm
Weight excl. battery	: 2.1 kg
Chuck capacity min/max	: 1.5 / 13 mm
Torque settings	: 25 + 1

GSB 18V-150C Solo** Cordless Combi (0 601 9J5 1L0)

HEAVY DUTY



150 pts



Capacity	
Battery Voltage	: 18 V
Torque (soft/hard/max.)	: 84/100/150Nm
No-load speed(1st gear)	: 0 - 550 rpm
(2nd gear)	: 0 - 2,200 rpm
Weight excl. battery	: 2.2 kg
Chuck capacity min/max	: 1.5 / 13 mm
Torque settings	: 25 + 2

GBH 18V-34 CF Solo** Cordless Rotary Hammer (0 611 914 082)

HEAVY DUTY



360 pts



Capacity	
Battery Voltage	: 18 V
Equivalent to corded power	: 950 W
Max. impact energy	: 5.8 J
No-load speed	: 0 - 500 rpm
Impact rate	: 2,900 bpm
Weight with battery	: 5.9 kg

GBH 18V-36 C Solo** Cordless Rotary Hammer (0 611 915 082)

HEAVY DUTY



400 pts



Capacity	
Battery Voltage	: 18 V
Equivalent to corded power	: 1,000 W
Max. impact energy	: 7.0 J
No-load speed	: 0 - 500 rpm
Impact rate	: 2,900 bpm
Weight with battery	: 6.1 kg

GBH 18V-45 C Solo** Cordless Rotary Hammer (0 611 913 080)

HEAVY DUTY



670 pts



Capacity	
Battery Voltage	: 18 W
Single impact energy	: 12.5 J
Impact rate drilling	: 2,720 bpm
Impact rate chiselling	: 2,760 bpm
Drilling diameter	: 12-45 mm
Rated Toll Speed	: 0 - 305 rpm
Weight with battery	: 9.3 kg

GKS 18V-68 GC Solo** Cordless Circular Saw (0 601 6B5 180)

HEAVY DUTY



240 pts



Capacity	
Battery Voltage	: 18 V
Battery	: ProCORE18V 8.0*
SB Diameter /	: 190 mm
Bore Size	: 20 mm
Cutting Capacity (90°)	: 68 mm
(45°)	: 50 mm
Bevel Capacity	: 0 - 50°
No-load Speed	: 2,500 - 5,000 rpm

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GTS 18V-216 Solo**
Cordless Table Saw
(0 601 B44 0K0)

HEAVY DUTY



380 pts

Capacity	
Battery Voltage	: 18 V
Saw blade diameter	: 216 mm
Bore hole diameter	: 30 mm
Base blade thickness	: 2.0 / 1.4 mm
No-load Speed	: 4,500 rpm
Weight with battery	: 21.6 kg
Cutting height	: 70 mm
Cutting capacity	: 635mm

GCM 18V-216 D Solo**
Cordless Mitre Saw
(0 601 B51 080)

HEAVY DUTY



310 pts

Capacity	
Battery Voltage	: 18 V
No-load speed	: 5,000 rpm
Saw Blade diameter	: 216 mm
Saw Blade Teeth	: 24 mm
Cutting dept 0° Miter/0° Bevel:	66x305 mm
Miter Setting	: 48° / 48°
Bevel Setting	: 47° / 47°
Weight	: 12.5 kg

GCM 18V-254 D Solo**
Cordless Mitre Saw
(0 601 B51 180)

HEAVY DUTY



420 pts

Capacity	
Battery Voltage	: 18 V
No-load speed	: 4,500 rpm
Saw Blade diameter	: 254 mm
Saw Blade Teeth	: 40 mm
Cutting dept 0° Miter/0° Bevel:	90x305 mm
Miter Setting (L/R)	: 52° / 60°
Bevel Setting (L/R)	: 47° / 47°
Weight	: 17.0 kg

GCM 18V-305 GDC Solo**
Cordless Mitre Saw
(0 601 B43 0K0)

HEAVY DUTY



680 pts

Capacity	
Battery Voltage	: 18 V
Max. Cutting Dept	: 120 mm
Width	: 400 mm
Equivalent to	: 2,000 W
Disc diameter	: 305mm
No-load speed	: 2,550 - 4,000 rpm
Weight incl. battery	: 27.8 kg

GWS 18V-15 SC (100mm) Solo**
Cordless Angle Grinder
(0 601 9H6 1B2)

HEAVY DUTY



170 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored power:	1,500 W
Disc diameter	: 100 mm
No-load speed	: 9,800 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-15 SC (125mm) Solo**
Cordless Angle Grinder
(0 601 9H6 100)

HEAVY DUTY



170 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored power:	1,500 W
Disc diameter	: 125 mm
No-load speed	: 3,400 - 9,800rpm
Weight w/o battery	: 2.3 kg

GWS 18V-15 SC (150mm) Solo**
Cordless Angle Grinder
(0 601 9H6 300)

HEAVY DUTY



170 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored power:	1,500 W
Disc diameter	: 150 mm
No-load speed	: 2,600 - 7,400 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-15 PSC Solo**
Cordless Angle Grinder
(0 601 9H6 B00)

HEAVY DUTY



190 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored power:	1,500 W
Disc diameter	: 125 mm
No-load speed	: 3,400 - 9,800 rpm
Weight w/o battery	: 2.3 kg

GWS 18V-180 PC Solo**
Cordless Angle Grinder
(0 601 9H6 E01)

HEAVY DUTY



190 pts

Capacity	
Battery Voltage	: 18 V
Equivalent to cored input power:	1,500 W
Equivalent to cored output power:	1,130 W
Disc Size	: 180 mm
Spindle	: M14
No-load Speed	: 7,000 rpm
Weight w/o battery	: 2.8 kg
Cutting Depth	: 61 mm
Grip Circumference	: 156


GCY 42 Professional
(1 600 A01 L2W)




Capacity	
Reach	: 30 m
Output power	: <1 mW

Guide Rail

Guiderrail compatible with GKS 18V-68 GC



FSN 1100
(1 600 Z00 006)



FSN 1600
(1 600 Z00 00F)



FSN 2100
(1 600 Z00 007)

FSN KK (plastic cover)
(1 600 Z00 00C)



FSN KZW (clamps)
(1 600 A00 1F8)



FSN RS (kickback stop)
(1 600 Z00 00M)



12 V Li-Ion Bosch Professional

GSR 120-LI GEN 2
Cordless Drill / Driver
(0 601 9G8 0L0)



50 pts

Capacity	
Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
Weight	: 0.97 kg

GSB 120-LI GEN 2
Cordless Combi
(0 601 9G8 1L0)



50 pts

Capacity	
Battery Voltage	: 12 / 2.0 Ah
Torque (Hard / Soft)	: 30 / 14 Nm
No-load Speed	: 0 - 400 / 0 - 1,500 rpm
Drilling	
- in Wood	: 20 mm
- in Metal	: 10 mm
- in Masonry	: 8 mm
Weight	: 1.06 kg

GDR 120 LI
Cordless Impact Driver
(0 601 9F0 0L6)



60 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Max. Torque Hard	: 100 Nm
No-load Speed	: 0 - 1,300 / 2,600 rpm
Impact Rate	: 0 -1900/3200 bpm
Max Screw Dia.	: 8 mm
Bit Holder	: 1/4"
Charging Time	: 90 mins
Weight	: 1.05 kg

Pro Pruner
Cordless Secateur
(0 601 9K1 0L1)



110 pts

Capacity	
Battery Voltage	: 12 V
Battery Capacity	: 3.0 Ah
Max. Cutting Diameter	: 25 mm
Weight with	: 1.0 kg
12 V / 3.0AH Battery	
No. of Cuts per Charge	: 4,500

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

12 V Li-Ion Bosch Heavy Duty

GSR 12V-30 Cordless Drill / Driver (0 601 9G9 0L1)

HEAVY DUTY



80 pts



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 20 mm
Max. Torque (hard/soft)	: 30 / 18 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Weight	: 0.82 kg

GSB 12V-30 Cordless Impact Drill Driver (0 601 9G9 1L1)

HEAVY DUTY



90 pts



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10mm
In Wood	: 20 mm
In Masonry	: 8mm
Max. Torque (hard/soft)	: 30 / 18 Nm
No-load speed	: 0 - 420 / 1,600 rpm
Weight	: 0.82 kg

GDR 12V-EC Cordless Impact Driver (0 601 9E0 0L2)

HEAVY DUTY



100 pts



Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Weight	: 0.95 kg

GSR 12V-15 FC Cordless Screw / Drill Driver (0 601 9F6 0L0)

HEAVY DUTY



110 pts

Capacity	
Battery Voltage	: 12 V / 2.0 Ah
Drilling Dia.: In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque (hard/soft)	: 30 / 15 Nm
No-load Speed	: 0 - 400 / 1,300 rpm
Chuck Capacity	: 10 mm
Charging Time	: 45 mins
Charger	: AL 1230 CV
Weight	: 0.6 kg (tool only)

18V BITURBO

12V Cordless

GWS 12V-76 Solo** Cordless Angle Grinder (0 601 9F2 000)

HEAVY DUTY



60 pts



Capacity	
No-load Speed	: 19,500 rpm
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

GOP 12V-28 Solo** Cordless Multi-Cutter (0 601 8B5 0L0)

HEAVY DUTY



70 pts



Capacity	
Oscillation Angle on Left / Right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Weight	: 0.81 kg

GRO 12V-35 Solo** Cordless Rotary Tool (0 601 9C5 0K1)

HEAVY DUTY



40 pts

Capacity	
Battery Voltage	: 12 V
Max. Collet Diameter	: 3.2mm
No-load speed	: 5,000 / 32,000 rpm
Weight	: 0.62 kg

GAS 12V-LI Solo** Cordless Vacuum Cleaner (0 601 9E3 081)

HEAVY DUTY



30 pts

Capacity	
Battery Voltage	: 12 V
Container Volume	: 0.35 l
Filter Surface	: 408 cm²
Max. Volume Flow Rate	: 15 l/sec
Max. Volume Pressure	: 45 mbar
Weight	: 0.9 kg

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer Drill,

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

GSA 12V-LI Solo** Cordless Sabre Saw (0 601 64L 9L2)

HEAVY DUTY



60 pts

Capacity	
Battery Voltage	: 12 V
Stroke speed	: 0 - 3,000 spm
Stroke Length	: 14.5 mm
Cutting depth in metal profiles & metal pipes	: 50 mm
Wood	: 65 mm

GST 12V-LI Solo** Cordless Jigsaw (0 601 5A1 0L1)

HEAVY DUTY



60 pts

Capacity	
Battery Voltage	: 12 V
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

GKF 12V-8 Solo** Cordless Palm Router (0 601 6B0 0L0)

HEAVY DUTY



100 pts



Capacity	
Battery Voltage	: 12 V
Collect Size	: 8 (UNI), 6 & 1/4 (RAP) mm
No-load rotation	: 13,000 min ⁻¹
Weight	: 1.1 kg



Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Router, Hot Air Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

GKS 12V-LI Solo** Cordless Circular Saw (0 601 6A1 0L2)

HEAVY DUTY



70 pts

Capacity	
Battery Voltage	: 12 V
No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

GHO 12V-20 Solo** Cordless Planer (0 601 5A7 0K0)

HEAVY DUTY



120 pts

Capacity	
Battery Voltage	: 12 V
No-load Rotation	: 14,500 rpm
Planing Depth (optimal)	: 0 - 1.0 (2.0) mm
Planing width max	: 40 mm
Weight w/o Battery	: 1.5 kg



GLI 12V-330 Solo** Cordless Torch (0 601 4A0 000)

HEAVY DUTY



30 pts

Capacity	
Battery Voltage	: 12 V
Runtime	: 6 h
Brightness	: 330 lmn
Brightness (1m Dis.)	: 350 lux
Weight	: 0.3 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

12 V Li-Ion Battery Pack



GBA 12V 2.0 Ah
(1 600 A00 F6X)



GBA 12V 4.0 Ah
(1 600 A00 F71)



GBA 12V 6.0 Ah
(1 600 A00 X7H)

18 V Li-Ion Battery Pack



GBA 18V 2.0 Ah
(1 600 A00 1CG)



GBA 18V 4.0 Ah
(1 600 A00 163)

ProCORE 18V Battery Pack



ProCORE 18V 4.0 Ah
(1 600 A01 93L)



ProCORE 18V 8.0 Ah
(1 600 A01 93N)



ProCORE 18V 12.0 Ah
(1 600 A01 93R)

Charger - 12V



GAL 12V-20
(for 10.8 V &
12 V Battery)
(1 600 A02 1KG)



GAL 12V-40
(for 10.8 V &
12 V Battery)
(1 600 A01 B8Z)

Charger - 18V



GAL 18V-20 CV
(for 18 V Battery)
(1 600 A02 1KV)



GAL 18V-40 CV
(for 14.4 V &
18 V Battery)
(1 600 A01 B92)



GAL 1880 CV
(for 14.4 V &
18 V Battery)
(1 600 A00 B8H)



GAL 18V-160 C
(for 18 V Battery)
(1 600 A01 9S7)



GAL 18V6-80
(For 14.4-18V)
(1600A01U9M)

Starter Kit



12V 2.0 Ah (2 Batteries)
+ GAL 12 V-40 (1 Charger)
(1 600 A01 B8Y)



18V 2.0 Ah (2 Batteries)
+ GAL 18V-40 CV (1 Charger)
(1 600 A01 B91)



18V 4.0 Ah (2 Batteries)
+ GAL 18V-40CV (1 Charger)
(1 600 A01 9S1)

ProCORE 18 V Starter Kit



ProCORE starter kit
18V 4.0 Ah (2 Batteries)
+ GAL 1880 CV (1 Charger)
(1 600 A01 6GG)



ProCORE starter kit
18V 8.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GR)



ProCORE starter kit
18V 12.0 Ah (2 Batteries)
+ GAL 18V-160 C (1 Charger)
(1 600 A01 6GZ)

L-BOXX



L-BOXX 102
(1 600 A01 2FZ)



L-BOXX 136
(1 600 A01 2G0)



L-BOXX 238
(1 600 A01 2G2)



L-BOXX 374 (Indent)
(1 600 A01 2G3)

Trolley / Roller



L-BOXX Trolley
(1 600 A00 1SA)



L-BOXX Roller
(1 600 A00 1S9)



More power

ProCORE18V:
latest cell technology
and intelligent battery
management.



+87%
more
power*

Power Boost Mode:
get back to work
faster than ever.



9 min.
to 50%²

Longer lifetime

COOLPACK 2.0
technology:
prevents the battery
from overheating.











Up to
135%
longer
lifetime³

* GBA 18V 6.0Ah vs. ProCORE18V 8.0Ah: 860 W vs. 1620 W.

² To reach 50% charge of the ProCORE18V 4.0Ah (in Power Boost Mode). As of May 2019.

³ Vs. no Bosch COOLPACK 2.0 technology.

Charging Time For Battery Capacity (Minute)

		12 V Charger			18 V Charger			
		GAL 12V-20 (1 600 A00 F6X)	GAL 12V-40 (1 600 A01 B8Z)	GAL 18V-20 CV (1 600 A02 1KV)	GAL 18V-40 CV (1 600 A01 B9Z)	GAL 1880 CV (1 600 A00 B8H)	GAL 18V-160 C (1 600 A01 957)	
12 V	 2.0 Ah (1 600 A00 F6X)	65	35					
	 4.0 Ah (1 600 A00 F71)	125	65					
	 6.0 Ah (1 600 A00 X7H)	185	95					
18 V	 2.0 Ah (1 600 A00 1CG)			65	40	15	-	
	 4.0 Ah (1 600 A00 163)			125	60	35	25	
ProCORE 18 V	 4.0 Ah (1 600 A01 93L)			-	-	50	50	
	 8.0 Ah (1 600 A01 93N)			-	-	65	55	
	 12.0 Ah (1 600 A01 93F)			-	-	90	60	

* Above data is based on approximate charging time

GBM 400 (0 601 1C1 0L0)

Powerful, compact and keyless

Slim and Compact **SP**
To work with more flexibility in narrow space

10 mm Keyless Chuck
Convenience from fast accessory change

High Precision
Max. concentricity of 0.4 mm to work confidently with delicate applications

Reduced Noise **SP**
Less noise thanks to enhanced gear housing

Better User Experience **SP**
Optimized air-flow design avoids overheating and improves comfort

Forward / Reverse
Easy slide switch

High Performance **SP**
Upgraded 400 W motor to help job done efficiently

Increased Durability **SP**
Optimized carbon brush holder structure and new gear design bring longer lifetime

Excellent Ergonomics
New industrial design for one hand "in-line" use and effortless drilling

Lock-on Button
Continuous drilling with trigger lock

Electronic Variable Speed Switch
Smooth speed control

GBM 400	Unit	Specifications
Rated power	W	400
No-load speed	rpm	0 -2,800
Chuck type	-	Keyless
Length x height x width	mm	240 x 195 x 65
Chuck capacity	mm	10
Steel drilling	mm	10
Aluminum drilling	mm	13
Wood drilling	mm	20
Weight	kg	1.3

Drill

GBM 320 (0 601 1A4 5L0)

HEAVY DUTY

20 pts

Capacity
Power Input : 320 W
In Steel : 6.5 mm
In Aluminium : 13 mm
In Wood : 13 mm
No-load Speed : 4,200 rpm
Weight : 1.0 kg

GBM 10 RE (0 601 473 5L0)

HEAVY DUTY

40 pts

Capacity
Power Input : 450 W
In Steel : 10 mm
In Aluminium : 10 mm
In Wood : 25 mm
No-load Speed : 0 - 2,600 rpm
Weight : 1.3 kg

GBM 13 RE (0 601 477 5L0)

HEAVY DUTY

50 pts

Capacity
Power Input : 600 W
In Steel : 13 mm
In Aluminium : 13 mm
In Wood : 30 mm
No-load Speed : 0 - 2,600 rpm
Weight : 1.70 kg

GBM 13 HRE (0 601 049 603)

HEAVY DUTY

105 pts

Capacity
Power Input : 550 W
In Steel : 13 mm
In Aluminium : 20 mm
In Wood : 40 mm
No-load Speed : 0 - 550 rpm
Torque (Approx.) : 40 Nm
Weight : 2.1 kg

GBM 50-2 (0 601 1B4 0L0)

HEAVY DUTY

720 pts

Capacity
Power : 1,200 W
No-load Speed : 50-255 / 100-510 rpm
Annular Cutter : Ø50 mm
Max. Twist Drill : Ø23 mm
Max Thread : M16
Magnetic Force : 14,000 N
Weight : 14.7 kg

Impact Drill

GSB 10 RE (0 601 216 1L6)

HEAVY DUTY

40 pts

Capacity
Power Input : 500 W
In Masonry : 10 mm
In Steel : 8 mm
In Wood : 20 mm
No-load Speed : 0 - 2,600 rpm
Weight : 1.5 kg

GSB 16 RE (0 601 228 1L2)

HEAVY DUTY

60 pts

Capacity
Power Input : 750 W
In Concrete : 16 mm
In Steel : 12 mm
In Wood (hard) : 25 mm
No-load Speed : 0 - 3,250 rpm
Impact Rate : 0 - 48,500 bpm
Weight : 1.8 kg

GSB 20-2 RE (0 601 1A2 1L0)

HEAVY DUTY

90 pts

Capacity
Power Input : 800 W
In Concrete : 20 mm
In Steel : 13 mm
In Wood : 40 mm
No-load Speed : 0 - 1,100 / 3,000 rpm
Impact Rate : 0 - 16,000 / 48,000 bpm
Weight : 2.6 kg

GSB 600 (0 601 1A0 3L0)

HEAVY DUTY

20 pts

Capacity
Rated Power : 600 W
No-load Speed : 0 - 3,000 rpm
Impact Rate : 0 - 48,000 bpm
Chuck Capacity : 13 mm
Metal Drilling : 10 mm
Masonry Drilling : 13 mm
Wood Drilling : 25 mm
Weight : 1.7 kg

Multi Cutter

GOP 30-28 (0 601 237 0L0)

HEAVY DUTY

90 pts

Capacity
Power Input : 300W
Oscillating amplitude : 2.8° (2 x 1.4°)
No-load Speed : 8,000 - 20,000 opm
Weight : 1.5 kg

Foam Cutter

GSG 300 (0 601 575 103)

HEAVY DUTY

300 pts

Capacity
Power Input : 350 W
Cutting Capacity : 300 mm
No-load Stroke Rate : 3,500 spm
Weight : 1.6 kg

Stirrer / Mixer Drill

GRW 12 E (0 601 1A7 070)

HEAVY DUTY

240 pts

Capacity
Power Input : 1,200 W
Connector Type : M14 Inside Thread
Max. Paddle Ø : 140 mm
Incl. Paddle Ø : 140 mm
No-load Speed : 0 - 1,000 rpm
Nominal speed : 0 - 620 min⁻¹
Weight : 5.3 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (P) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GWS 700 (0 601 3A3 1L0)

Comfort with performance - an ideal grinder for your daily work

NEW!

WHY THIS

- 01 High Performance**
Powerful motor with outstanding overload capacity
- 02 Long Lifetime**
Reliable structure design and qualified components to ensure the tool fulfill Bosch quality requirement
- 03 Ease of Use**
Light weight and compact housing design

High Removal Rate ^{USP}

Powerful motor with outstanding overload capability

Better Motor Cooling For Uninterrupted Longer Work

With double air inlets for additional air flow

Long Gear Lifetime

Thanks to the robust metal flange

Reliable Performance & Lifetime ^{SP}

Simple yet reliable design

Comfortable Handling and Easy Control ^{USP}

Compact & slim grip
Ergonomic palm-fit round design



TARGET USERS

- Metal workshops
- General construction
- Metal fabricators
- Renovating
- Wall chasing

20 pts



GWS 700	Unit	Specifications
Voltage	V	220 - 240
Power	W	710
No-load Speed	rpm	12,000
Disc Diameter	mm	100
Grip Size	mm	185
Spindle	-	M10
Weight	kg	1.6

Straight Grinder

GGS 5000 L
(0 601 224 1L0)



1 607 031 223 **90 pts**

Capacity	
Power Input	: 500 W
Max. Collet Capacity	: 8 mm
No-load Speed	: 33,000 rpm
Weight	: 1.4 kg

GGS 28 LC
(0 601 221 070)

HEAVY DUTY



KICK BACK STOP
ELECTRONIC
1 607 014 176 **130 pts**

Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 28,000 rpm
Weight	: 1.6 kg

GGS 28 C
(0 601 220 070)

HEAVY DUTY



KICK BACK STOP
ELECTRONIC
1 607 014 176 **90 pts**

Capacity	
Power Input	: 650 W
Max. Collet Diameter	: 8 mm
No-load Speed	: 30,000 rpm
Weight	: 1.4 kg

4" Angle Grinder

GWS 750-100
(0 601 394 0L0)

HEAVY DUTY



1 619 P11 715 **30 pts**

Capacity	
Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Weight	: 1.8 kg

GWS 7-100 ET
(0 601 388 5L0)

HEAVY DUTY



1 619 P02 870 **40 pts**

Capacity	
Power Input	: 720 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 2,800 - 9,300 rpm
Weight	: 1.8 kg

GWS 900-100
(0 601 396 0L0)

HEAVY DUTY



1 619 P11 715 **50 pts**

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg

GWS 900-100 S
(0 601 396 1L0)

HEAVY DUTY



1 619 P11 715 **50 pts**

Capacity	
Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 2,800 - 11,000 rpm
Weight	: 1.9 kg

GWS 9-100 P
(0 601 396 5L0)

HEAVY DUTY



1 619 P11 715 **40 pts**

Capacity	
Power Input	: 900 W
Disc Diameter	: 100 mm
Spindle Thread	: M10
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

5" Angle Grinder

GWS 12-125 S
(0 601 3A6 0P0)

HEAVY DUTY



60 pts

Capacity	
Input Power	: 1,200 w
No-load Speed	: 2,800 - 11,000 / 2,800 - 10,000 rpm
Disc Diameter	: 125 mm
Spindl size	: M14
EPTA Weight	: 2.2 kg



GWS 17-125 CI
(0 601 79G 002)

HEAVY DUTY



90 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Weight	: 2.4 kg

GWS 18-125 L (Indent)
(0 601 7A3 0L0)

HEAVY DUTY



90 pts

Capacity	
Power Input	: 1,800 W
No-load Speed	: 12,000 rpm
Spindle Thread	: M14
Disc Diameter	: 125 mm
Weight	: 2.5 kg

6" Angle Grinder

GWS 17-150 CI
(0 601 79K 002)

HEAVY DUTY



100 pts

Capacity	
Power Input	: 1,700 W
No-load Speed	: 9,300 rpm
Spindle Thread	: M14
Disc Diameter	: 150 mm
Weight	: 2.4 kg

7" Angle Grinder

GWS 2200-180
(0 601 8C0 0L0)



80 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 8,500 rpm
Spindle Thread	: M14
Disc Diameter	: 180 mm
Main Handle	: Barrel
Weight	: 5.2 kg

GWS 24-180 JZ
(0 601 8C2 3L0)

HEAVY DUTY

90 pts

Capacity	
Power Input	: 2,400 W
No-load Speed	: 8,500 rpm
Spindle Thread	: M14
Disc Diameter	: 180 mm
Main Handle	: Barrel
Weight	: 5.8 kg

GWS 30-180 B
(0 601 8G0 0L0)

HEAVY DUTY

200 pts

Capacity	
Rated Input Power	: 2,800 W
No-load speed	: 8,500 rpm
Disc Diameter	: 180 mm
Spondler Size	: M14
Main handle	: Rattail
Rubber backing pad, diameter	: 180 mm
Wire cup Brush, diameter	: 100 mm
Weight	: 5.7 kg
Switch	

9" Angle Grinder

GWS 2200-230
(0 601 8C1 0L0)



90 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14
Disc Diameter	: 230 mm
Main Handle	: Barrel
Weight	: 5.4 kg

GWS 24-230 JZ
(0 601 8C3 3L0)

HEAVY DUTY

110 pts

Capacity	
Power Input	: 2,400 W
No-load Speed	: 6,500 rpm
Spindle Thread	: M14
Disc Diameter	: 230 mm
Main Handle	: Barrel
Weight	: 6 kg

GWS 30-230 B
(0 601 8G1 0L0)

HEAVY DUTY

200 pts

Capacity	
Rated Input Power	: 2,800 W
No-load speed	: 6,500 rpm
Disc Diameter	: 230 mm
Spondler Size	: M14
Main handle	: Rattail
Rubber backing pad, diameter	: 230 mm
Wire cup Brush, diameter	: 100 mm
Weight	: 5.9 kg
Switch	: Lockable Switch

Marble Cutter

GDC 140
(0 601 3A4 0L0)



30 pts

Capacity	
Power Input	: 1,400 W
No-load Speed	: 13,200 rpm
Max. Cutting Disc Diameter	: 115 mm
Max. Cutting Dept	: 35 mm
Weight	: 2.9 kg

Bench Grinder

GBG 35-15
(0 601 27A 3L0)

HEAVY DUTY



60 pts

Capacity	
Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	: 10 kg

GBG 60-20
(0 601 27A 4L0)

HEAVY DUTY



70 pts

Capacity	
Power Input	: 600 W
No-load Speed	: 3,600 rpm
Disc Diameter	: 200 mm
Weight	: 15 kg

Reciprocating Saw

GSA 120
(0 601 6B1 0L0)



80 pts

Capacity	
Input Power	: 1,200 W
Stoke Rate	: 0 - 3,000 spm
Stroke Length	: 29 mm
Max. Cutting Dept in Wood	: 220 mm
in Metal	: 220 mm
Weight	: 3.7 kg

Nibbler

GNA 2.0
(0 601 530 103)

HEAVY DUTY



260 pts

Capacity	
Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Stroke Rate	: 2,400 spm
Weight	: 2.0 kg

GAC 250 (0 601 2B6 0L0)

Effortless sanding in every direction.

NEW!

WHY THIS

01 Effortless

02 Fast & Powerful

03 Durable

Maximum Comfort All Day long

Ergonomic handle designed for comfortable all-day operation

Effortless AAC Cutting ^{USP}

Balanced tool weight distribution and downward facing guide bar to make AAC block cutting effortless

Fast Cutting Speed ^{USP}

Powerful 1,200 W motor and optimized chain speed for faster cutting

Extra Care On Users' Health

Possibility to connect dust extraction adapter*

Safety First

Lock-off button, emergency front brake and auxiliary handle to ensure safe operation



Excellent Portability

Smaller than an AAC block**, lighter than 5kg, the tool made to cut anywhere



Durable Accessories

Tungsten-carbide-tipped saw chain made to last in heavy dust application

* Adapter is a separate accessory, supplied in selected executions only ** 20 cm thick AAC blocks

TARGET USERS

• Masonry & Restoration • General Contractors



GAC 250	Unit	Specifications
Input power	W	1,200
No-load chain speed	m/s	max. 12
Chain bar length	mm	335
Max. cutting capacity	mm	250
Tool weight (incl. accessories)	kg	4.7
Bare tool size (L*W*H)		
(include. auxiliary handle)	mm	310 x 210 x 210
Dust extraction interface	-	Yes

110 pts

Jigsaw

GST 700
(0 601 2A7 0L0)



40 pts

Capacity	
Power Input	: 500 W
Stroke Rate	: 1,450 - 3,200 spm
Cutting Depth in Wood	: 70 mm
Stroke Length	: 20 mm
Weight	: 2.1 kg

GST 90 BE
(0 601 58F 0L0)

HEAVY DUTY



90 pts

Capacity	
Rated power input	: 650 W
No-load stroke rate	: 500 - 3,100 spm
Stroke length	: 26 mm
Cutting Capacity	
- Wood	: 90 mm
- In aluminium	: 20 mm
- In steel (unalloyed)	: 10 mm
Weight	: 2.6 kg

GST 680
(0 601 5B4 0L1)



40 pts

Capacity	
Power	: 500 W
Stroke Rate	: 800 - 3,100 spm
Stroke Length	: 20 mm
Cutting Depth	: 68 mm
Bevel Angle	: -45° ~ +45°
Weight	: 2.0 kg

Circular Saw

GKS 600
(0 601 6A9 0L0)



60 pts

Capacity	
Power Input	: 1,200 W
No-load Speed	: 5,200 rpm
Blade Bore Size	: 20 mm
Diameter	: 165 mm
Cutting depth (90°/45°)	: 55 / 37 mm
Weight	: 3.6 kg

GKS 140
(0 601 6B3 0L1)



60 pts

Capacity	
Input Power	: 1,400 W
No-load Speed	: 6,200 rpm
Blade Bore Size	: 20 mm
Diameter	: 184 mm
Max. Cutting Dept	: 64+/- mm
Bevel Capacity	: 0 - 45 °

GKS 190
(0 601 623 0L9)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 1,400 W
Blade Diameter	: 184 mm
Max. Cutting Capacities	
at 90°	: 67 mm
at 45°	: 48 mm
No-load Speed	: 5,500 rpm
Weight	: 4.1 kg

GKS 235 Turbo
(0 601 5A2 0L0)

HEAVY DUTY



110 pts

Capacity	
Power Input	: 2,050 W
Saw Blade Diameter	: 235 mm
Max. Cutting Capacities	
at 90°	: 85 mm
at 45°	: 65 mm
No-load Speed	: 0 - 5,300 rpm
Weight	: 7.6 kg

Cut-off Machine

GCO 220
(0 601 B37 3L0)



70 pts

Capacity	
Power Input	: 2,200 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Cutting Capacity	
Square Bar	□ : 119 x 119 mm
Round Bar	○ : 129 mm
Weight	: 15 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

GCO 14-24J (0 601 B37 2L0)

HEAVY DUTY



1 607 014 171

105 pts

Capacity	
Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Cutting Capacity	: 100 x 196 mm
	: 119 x 119 mm
	: 130 x 130 mm
Weight	: 18.1 kg

Mitre Saw

GCM 10 MX (0 601 B29 0L0)

HEAVY DUTY



1 607 014 171

150 pts

Capacity	
Power Input	: 1,700 W
Blade Size	: 254 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Weight	: 16.8 kg

GCM 12 GDL (0 601 B23 670)

HEAVY DUTY



2 610 021 311

520 pts

Capacity	
Power Input	: 2,000 W
Blade Size	: 305 mm
Arbour Size	: 30 mm
No-load Speed	: 3,800 rpm
Max. Mitre	: 52° L / 60° R
Cutting Capacity	: 104 x 341 mm
Weight	: 32.1 kg

GCM 216 (0 601 B33 0L0)



150 pts

Capacity	
Power Input	: 1,300 W
Saw Blade diameter	: 216 mm
Mitre Setting	: 47° L / 47° R
Bevel Setting	: 47° L / 0° R
Rated Input Power	: 1,300 W
Cutting Capacity, 0°	: 60 x 123 mm
Cutting Capacity, 45° Mitre	: 60 x 80 mm
Cutting Capacity, 45° Bevel	: 43 x 123 mm
No-load Speed	: 4,800 rpm
Weight	: 10.1 kg

Slide Mitre Saw

GCM 8 SJL (0 601 B19 1L0)

HEAVY DUTY



1 609 B03 790

210 pts

Capacity	
Power Input	: 1,600 W
Blade Size	: 216 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,500 rpm
Max. Miter	: 52° L / 60° R
Cutting Capacity	: 70 x 312 mm
Weight	: 17.3 kg

Mitre Saw Stand

T 1B (0 601 B12 310)



Capacity	
Length of Work Bench without Extension	: 1,220 mm
Length of Work Bench with extension	: 2,630 mm
Weight	: 15 kg / 19 kg

Table Saw

GTS 254 (0 601 B45 0L0)



140 pts

Capacity	
Cutting depth 90° / 45°	: 80 / 55 mm
Rip cut capacity	: 545 mm
Power	: 1,800 W
Saw blade diameter	: 254 mm
Overload / restart protection	: Yes
Weight with Stand	: 24.4 kg
Stand Feet	: Yes
Table Material	: Steel with Coating
No-Load Speed	: 4,300 rpm

GTS 10 J (0 601 B30 5L1)

HEAVY DUTY



2 610 018 332

310 pts

Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47° L / 2° R
Cutting Capacity (Right)	: 635 mm
(Left)	: 255 mm
Weight	: 26 kg

Table Saw Stand

GTA 600 (0 601 B22 002)



Capacity	
Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Eccentric Sander

GEX 125-1 A / GEX 125-1 AE (0 601 387 0L0) / (0 601 387 5L0)

HEAVY DUTY



2 609 120 199

60/70 pts

Capacity	
Power Input	: 250 W
No-load Speed	: 7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opm
Sanding Plate	: 125 mm
Weight	: 1.3 kg

Planer

GHO 6500 (0 601 596 0L0)



2 609 120 398

40 pts

Capacity	
Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	: 0 - 2.6 mm
Adjustable Rebating Depth	: 0 - 9 mm
Weight	: 2.8 kg

GHO 10-82 (0 601 594 006)

HEAVY DUTY



2 609 120 064

80 pts

Capacity	
Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 1.0 mm
No-load Speed	: 16,500 rpm
Weight	: 2.5 kg

Belt Sander

GBS 75 A (0 601 274 004)

HEAVY DUTY



1 607 031 222

130 pts

Capacity	
Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Weight	: 3.2 kg

Polisher

GPO 950 (0 601 3A2 0L0)



Capacity	
Power Input	: 950 W
Adaptor Size	: M14 / M16
Rubber Sanding Plate, Diameter	: 180 mm
Variable Speed	: 600 - 2,100 rpm
Weight	: 2.3 kg

GPO 12 CE (0 601 389 0L0)

HEAVY DUTY



1 607 014 176

90 pts

Capacity	
Power Input	: 1,250 W
No-load Speed	: 750 - 3,000 rpm
Polishing Disc Diameter	: 180 mm
Thread of Polishing Spindle	: M14
Weight	: 2.5 kg

Orbital Sander

GSS 140 (0 601 2A8 0L0)



Capacity	
Power Input	: 220 W
No-load Speed	: 14,000 rpm
No-load Orbital Stroke Rate	: 28,000 min ⁻¹
Orbital Diameter	: 1.5 mm
Sanding Sheet Dimension	: 114 x 140 mm
Sanding Plate Dimension	: 101 x 112 mm
Weight	: 1.2 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

18V Cordless

18V BITURBO

12V Cordless

Battery, Charger, L-BOXX, Trolley, Roller

Drill, Impact Drill, Multi-Cutter, Foam Cutter, Mixer-Drill.

Straight Grinder, Angle Grinder, Bench Grinder

Diamond Cutter, Reciprocating Saw, Shear, Nibbler

Jigsaw, Circular Saw

Cut Off Machine, Mitre Saw, Table Saw

Planer, Sander, Polisher, Hot Air Gun, Router, Glue Gun, Blower, Vacuum

Rotary Hammer, Demolition Hammer

Hot Air Gun

GSS 2300
(0 601 298 0L0)

30 pts

Capacity	
Power Input	: 190 W
No-load Speed	: 12,000 rpm
Weight	: 1.5 kg

GHG 18-60
(0 601 2A6 1L0)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 1,800 W
Temperature	: 50 / 400 / 600 °C
Air Flow Rate	: 250 / 350 / 600 l/min
Weight	: 0.52 kg

GHG 20-63
(0 601 2A6 2L0)

HEAVY DUTY



60 pts

Capacity	
Power Input	: 2,000 W
Temperature	: 50 - 630 °C
Air Flow Rate	: 150 / 300 / 500 l/min
Weight	: 0.65 kg

Trimming / Router

GKF 550
(0 601 6A0 0L0)

40 pts

Capacity	
Power Input	: 550 W
No-load Speed	: 33,000 rpm
Bix Size	: 6 mm / 1/4"
Weight	: 1.4 kg

Glue Gun

GOF 130
(0 601 6B7 0L1)

70 pts

Capacity	
Power	: 1,300 W
No-load speed	: 11,000 - 28,000 rpm
Bit holder	: 6 - 8.0 mm
Plunge depth	: 55 mm
Weight	: 3.5 kg

Strictly prohibited from being used upside down

GKP 200 CE
(0 601 950 703)

HEAVY DUTY



55 pts

Capacity	
Power Input	: 500 W
Gluing Capacity	: 30 g/min
No. of Heating Elements	: 2
Warming Up Time	: 4 min
Glue Stick Length	: 200 mm
Weight	: 0.4 kg

Blower

GBL 620
(0 601 980 5L0)

30 pts

Capacity	
Power Input	: 620 W
No-load Speed	: 16,000 rpm
Air Flow Rate	: 3.5 m³/min
Weight	: 1.7 kg

GBL 82-270
(0 601 980 4L1)

HEAVY DUTY



40 pts

Capacity	
Power Input	: 800 W
No-load Speed	: 0 - 16,000 rpm
Air Flow Rate	: 0 - 4.5 m³/min
Weight	: 1.8 kg

Wet & Dry Vacuum Cleaner

GAS 15
(0 601 9E5 0L0)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 1,100 W
Container (gross/net)	: 15 / 8 litre
Max. Airflow Rate (Turbine)	: 53 l/sec
Max. Vacuum Pressure	: 22 kPa
Weight	: 6 kg

GAS 12-25 PL
(0 601 97C 1L0)

HEAVY DUTY



110 pts

Capacity	
Power Input	: 1,250 W
Container (gross/net)	: 25/21 litre
Max. Airflow Rate (Turbine)	: 65 l/sec
Max. Vacuum Pressure	: 200 mbar
Weight	: 9.0 kg

2 kg Rotary Hammer

GBH 220
(0 611 2A6 0L0)

60 pts

Capacity	
Impact Energy	: 2J
Power	: 720 W
No-load Speed	: 0 - 2,000 rpm
Max. drilling & Concrete	: 22 mm
Mode	: 3
Weight	: 2.3 kg

GBH 2-24 DRE
(0 611 272 1L0)

HEAVY DUTY



80 pts

Capacity	
Power Input	: 790 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 24 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 930 rpm
Impact Rate	: 0 - 4,200 bpm
Weight	: 2.8 kg

GBH 2-26 DRE
(0 611 253 76C)

HEAVY DUTY



120 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 2.7 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.7 kg

GBH 2-26 DFR
(0 611 254 76C)

HEAVY DUTY



140 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 3 J
In Concrete	: 4 - 26 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.9 kg

GBH 2-28 DFV
(0 611 267 2L1)

HEAVY DUTY



150 pts

Capacity	
Power Input	: 850 W
Impact Energy	: 3.2 J
In Concrete	: 4 - 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Weight	: 3.1 kg

3 kg Rotary Hammer

GBH 3-28 DFR
(0 611 24A 0L0)

HEAVY DUTY



200 pts

Capacity	
Power Input	: 800 W
Impact Energy	: 3.1 - 3.5 J
In Concrete	: 28 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 3.6 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.

4 kg Rotary Hammer

GBH 4-32 DFR
(0 611 332 1L0)

HEAVY DUTY



Capacity	
Power Input	: 900 W
Impact Energy	: 4.2 J
In Concrete	: 32 mm
In Steel	: 13 mm
In Wood	: 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Weight	: 4.7 kg

Rotary Hammer with SDS-Max

GBH 5-40 D
(0 611 269 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,100 W
Impact Energy (EPTA)	: 8.5 J
Max. App. in core cutter	: 90 mm
No-load Speed	: 170 - 340 rpm
Impact Rate	: 1,500 - 2,900 bpm
Weight	: 6.8 kg

GBH 5-40 DCE
(0 611 264 070)

HEAVY DUTY



Capacity	
Power Input	: 1,150 W
Impact Energy	: 8.8 J
Impact Rate	: 1,500 - 3,050 bpm
No-load Speed	: 170 - 340 rpm
Drilling Dia Concrete	: 12 - 40 mm
Vibration Values Drilling /Chiselling	: 10.5 / 7 / 5 m/s ²
Weight	: 6.8 kg

GBH 8-45 D
(0 611 265 1L0)

HEAVY DUTY



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,720 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Rated Speed	: 150 - 305 rpm
Weight	: 8.2 kg

GBH 8-45 DV
(0 611 265 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1500 W
Impact Rate	: 1,380 - 2,760 bpm
Impact Energy	: 12.5 J
Drilling Dia Concrete	: 12 mm - 45 mm
Vibration Values	
Drilling / Chiselling	: 8/7 m/s ²
Weight	: 8.9 kg

Demolition Hammer

GSH 500 GEN II
(0 611 338 6L0)



Capacity	
Power Input	: 1,100 W
Impact Energy- EPTA Value	: 7.8J
Impact Rate	: 2,900 bpm
Tool holder	: Hex 17 mm
Auxiliary Handle	: Straight Handle
Weight	: 5.6 kg

GSH 3 E
(0 611 320 703)

HEAVY DUTY



Capacity	
Power Input	: 650 W
Impact Rate	: 0-3,500 bpm
Impact Force	: 2.6 J
Weight	: 3.7 kg

GSH 5 (MAX)
(0 611 337 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,100 W
Impact Rate	: 2,850 bpm
Impact Energy	: 7.5 J
Weight	: 5.6 kg

GSH 5 CE
(0 611 321 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,150 W
Impact Rate	: 1,300 - 2,900 bpm
Impact Energy	: 13 J
Weight	: 6.2 kg

GSH 9 VC
(0 611 322 0L0)

HEAVY DUTY



Capacity	
Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s ²
Weight	: 8.5 kg

GSH 11 E
(0 611 316 8L1)

HEAVY DUTY



Capacity	
Power Input	: 1,500 W
Impact Energy	: 16.8 J
Impact Rate	: 900 - 1,890 bpm
Vibration Value	: 18.5 m/s ²
Weight	: 10.1 kg

GSH 11 VC
(0 611 336 0L0)


HEAVY DUTY



Capacity	
Power Input	: 1,700 W
Impact Rate	: 900 - 1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s ²
Weight	: 11.4 kg

GSH 14 C (HEX)
(0 611 344 0L0)

HEAVY DUTY




Capacity	
Rated Input Power	: 1,750 W
Impact Energy (EPTA)	: 28 J
Impact Rated at	: 1,900 bpm
Rated Speed	
Weight (EPTA-01:2014)	: 14.6 kg
Tool Holder	: Hex 22 mm
Vibration emission value ah	: 10.9
Uncertainty K	: 1.5



GSH 16-30 (HEX)
(0 611 335 1L0)


HEAVY DUTY



Capacity	
Power Input	: 1,750 W
Impact Rate	: 1,300 bpm
Impact Force	: 41 J
Weight	: 16.9 kg

GSH 27 VC (Hex 28mm)
(0 611 30A 070)

HEAVY DUTY

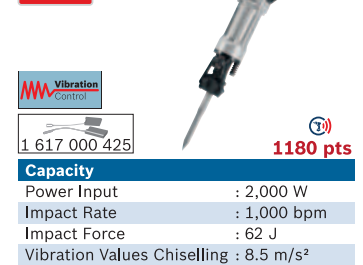

Capacity	
Power Input	: 2,000 W
Impact Rate	: 1,000 bpm
Impact Force	: 62 J
Vibration Values Chiselling	: 8.5 m/s ²
Weight	: 29.5 kg

* All Bosch professional tools are now entitled to 1 Year warranty, except batteries and chargers are entitled to 6 months warranty. **Solo - Bare tool only, batteries and charger not included. (pts) Point (pts) are meant for BeConnected App. User have to purchase, scan or manual register the participating tools and upload their invoices to receive the pts in their app. Battery and charger are not applicable for BeConnected points. Terms & condition apply.



BOSCH

The ultimate changing system.

JUST ONE CLICK.

XLOCK



GWX 9-125 S
(0 601 7B2 000)



80 pts

Capacity	
Rated Input Power	: 900 W
No-load Speed	: 2,800 - 11,000 rpm
Disc Diameter	: 125 mm
Power Output	: 450 W
Rubber Backing pad, Diameter	: 125 mm
Wire Cup Brush, Diameter	: 75 mm
Weight	: 2.1 kg
Switch	: Lockable Switch

GWX 14-125
(0 601 7B7 000)



70 pts

Capacity	
Rated Input Power	: 1,400 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 125 mm
Power Output	: 820 W
Rubber Backing pad, Diameter	: 125 mm
Wire Cup Brush, Diameter	: 75 mm
Weight	: 2.3 kg
Switch	: Lockable Switch

GWX 15-125 PS
(0 601 7B9 002)



90 pts

Capacity	
Rated Input Power	: 1,500 W
No-load Speed	: 2,800 - 11,000 rpm
Disc Diameter	: 125 mm
Power Output	: 820 W
Rubber Backing pad, Diameter	: 125 mm
Wire Cup Brush, Diameter	: 75 mm
Weight	: 2.5 kg
Switch	: PROtection Switch



GWX 180 Solo**
(0 601 9H9 1K0)



80 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 11,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 1.8 kg

GWX 18V-10 C Solo**
(0 601 7B0 200)



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.0 kg

GWX 18V-10 PC Solo**
(0 601 7B0 700)



130 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.0 kg

GWX 18V-15 SC Solo**
(0 601 9H6 500)



170 pts

Capacity	
Battery Voltage	: 18 V
No-load Speed	: 3,400 - 9,000 rpm
Disc Diameter	: 125 mm
Weight w/o Battery	: 2.3 kg



Dust Free Solution

The Click & Clean System is not only perfectly thought through, it is also really easy to use: connect the dust extractor and start working! This overview offers you a helpful guide to the tools, part numbers and extras such as adapters and accessories. You will also find mobile solutions for individual systems.














Listed adapters need to work with vacuum cleaner unless special remarked






















Product	Model / Application	Adapter No.	Adapter Picture	Application Picture
GWS Series  *T: Guard assembly Toolless *EA: Easy Adjust *FC: Full Coverd	Disc 100 mm Disc 115 / 125 mm Keyless	2 608 000 629 2 605 510 224		
	Disc 115 / 125 mm Max. cutting depth 25 mm	GDE 125 EA-T 1 600 A00 3DJ		
	Disc 125 mm Max. cutting depth 25 mm Disc 230 mm Max. cutting depth 60 mm	GDE 125 FC-T 1 600 A00 3DK GDE 230 FC-T 1 600 A00 3DM		
GSB Series 	For all GSB & GBH Holes Ø4-36 mm	Dust Cup 1.600.A00.D6H Work without vacuum		
	Holes or core cutter Ø4-24 mm	GDE 24 1 600 A01 M9V Work with or without vacuum	Dust Cup GDE 24	
	For all GSB & GBH & GBM Holes or core cutter Ø4-68 mm Holes or core cutter Ø24-162 mm	GDE 68 1 600 A00 1G7 GDE 162 1 600 A00 1G8	GDE 68 GDE 162	
GBH Series 	For 50 mm collar tool Holes Ø4-16 mm Or max 82 mm core cutter (Interchangeable adapter included)	GDE 16 Plus 1 600 A00 15Z		
	Only for GBH 18V-26 Holes Ø4-16 mm	GDE 18V-16 1 600 A00 51M *Self vacuum		
GSH Series 	For chiseling Max length 600 mm	GDE Max 1 600 A00 1G9		
	For breaking	GDE HEX 1 600 A00 1GA		
GST Series 	GST 12 V-Li GST 700	1 619 P10 585 Dust adapter included		
GKS Series 	GKS 190 GKS 7000 GKS 12 V-Li GKS 66 X / GKS 18 V-57	1 619 P06 204 1 619 P11 691 1 619 P11 537 1 619 P11 691		

Rotary Hammers application overview

Masonry: ■ Optimal ■ Total range of all application

Concrete: ■ Optimal ■ Total range of all application

Products		Drilling diameter in concrete, masonry (mm)																												Drilling in wood (mm)				Drilling in steel (mm)	
		4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	up to 20	20-25	25-30	30-40	up to 10	10-13			
2 kg Hammers	 GBH 220 Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 2-24 DRE Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 2-26 DRE Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 2-26 DFR Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 2-28 DFV Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
2 kg Cordless Hammers	 GBH 180-LI Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 185-LI Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 187-LI One Chuck Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
	 GBH 18 V-26 Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
3 kg Hammer	 GBH 3-28 DFR Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
4 kg Hammer	 GBH 4-32 DFR Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
6 kg Hammer	 GBH 5-40 DCE Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	
8 kg Hammer	 GBH 8-45 D / DV Professional	[Bar chart showing optimal and total ranges for concrete and masonry]																												[Bar chart showing wood drilling range]				[Bar chart showing steel drilling range]	

Drilling with hole saws in wood (mm)				Core cutting application in masonry, concrete (mm)				Material for drilling						Other characteristics		
up to 30	30-40	40-50	50-70	40-68	68-82	82-90	90-150	Reinforced concrete, granite, stone	Concrete	Bricks, hollow blocks	Hard wood	Soft wood	Metal	Drilling/Chiselling ratio	Working direction	Special features
■				■				■	■	■	■	■	■	90% 10%	↕	
■	■			■				■	■	■	■	■	■	90% 10%	↕	
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	Quick change chuck
■	■	■		■	■			■	■	■	■	■	■	90% 10%	↕	Quick change chuck 
■				■				■	■	■	■	■	■	90% 10%	↕	 
■				■				■	■	■	■	■	■	90% 10%	↕	    
■				■				■	■	■	■	■	■	90% 10%	↕	      
■	■	■		■				■	■	■	■	■	■	90% 10%	↕	  
■	■	■		■	■			■	■	■	■	■	■	80% 20%	↕	Quick change chuck 
■	■	■		■	■	■		■	■	■	■	■	■	70% 30%	↕	Quick change chuck 
				■	■	■		■	■	■				60% 40%	↕	
				■	■	■	■	■	■	■				50% 50%	↕	 Anti Vibration for GBH 8-45 DV only

Demolition Hammers application overview

■ Optimal ■ Possible

		Specification								
		Power	Weight	Impact energy	Tool holder	Working direction	Wall tile removal	Floor tile removal	Joint repair (removal of excess concrete)	De-plastering (removing cement plaster from the walls)
										
	GSH 3 E Professional	650 W	3.7 kg	2.6 J			■	■	■	■
	GSH 5 Professional	1100 W	5.6 kg	7.5 J			■	■	■	■
	GSH 500 (GEN II) Professional	1100 W	5.5 kg	7.8 J	17 mm Hex		■	■	■	■
	GSH 5 CE Professional	1150 W	6.2 kg	13 J			■	■	■	■
	GSH 9 VC Professional	1500 W	8.5 kg	13 J			■	■	■	■
	GSH 11 E Professional	1500 W	10.1 kg	6-25 J				■	■	■
	GSH 11 VC Professional	1700 W	11.4 kg	23 J				■	■	■
	GSH 14 C Professional	1750 W	14.8 kg	28 J	22mm Hex					
	GSH 16-30 Professional	1750 W	16.9 kg	41 J	30 mm Hex					
Accessories		Pointed chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Flat chisel	SDS plus/SDS max/Hex 17/Hex 28/Hex 30				■	■	■	■
		Tile chisel	SDS plus/SDS max				■	■		
		Spade chisel	SDS plus/SDS max/Hex 28/Hex 30				■	■	■	■
		Gouging chisel	SDS plus/SDS max							
		Bush hammer head	SDS max							
		Asphalt cutter	SDS max							
		Tamping plate	SDS max/Hex 28/Hex 30							
	Excavation chisel	SDS max/Hex 30								

Application

Roughing of concrete walls, columns	Wall chasing or groove cutting on masonry, cement blocks, concrete walls	Concrete wall corrections	Column & beam corrections (removing bulge, exposing reinforcements)	Making cut outs or breaches in masonry wall	Hacking of concrete & masonry walls (heavy duty)	Demolition of concrete floor, slabs	Foundation breaking, pavement breaking	Road works (Restoration of Asphalt coverings)	Digging in hard compacted soil	Compacting earth & gravel
	■									
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■	■	■	■	■	■					
■			■	■	■	■	■	■		
■			■	■	■	■	■	■		
						■	■	■	■	■
						■	■	■	■	■
	■	■	■	■	■	■	■	■		
	■	■	■	■	■	■	■	■	■	
■	■									
■										
										■
								■		



BOSCH

**ALL BOSCH PROFESSIONAL POWER TOOLS
NOW COMES WITH 12 MONTHS WARRANTY**

12 months



**HEAVY
DUTY**

6 Months Extended Warranty

**Valid for all Heavy Duty tools purchased and
registered on the BeConnected App in 2023**

Register E-warranty and Earn Rewards Now.

Battery and charger are not entitle for warranty extension



DOWNLOAD APP NOW:





BOSCH

PROMIX

FREE BATTERY & MORE WITH 18V TOOLS PURCHASE

DATE: 1 APRIL - 31 DECEMBER 2023



NOW WITH GREATER REWARDS





BUY  x2	GET GBA 18V 4.0Ah M-C 	NEW BUY  x3	GET Bosch tool bag + ProCore 18V 4.0Ah 	NEW BUY  x4	GET ProCORE 18V 8.0Ah + Bosch tool bag + GAL 1880 CV 
---	--	--	---	--	---

Each participating tools = 100 PROMIX points

Each account can earn maximum 1,200 PROMIX points

Promotion only valid for Private & Professional BeConnected Users

HERE'S HOW

 STEP 1 Buy two or more 18V participating tools from 1 Apr - 31 Dec 23	 STEP 2 Download BeConnected App and Login / Register for an Account	 STEP 3 Register the tools 1. Upload valid and clear invoice (incl. purchase date & model) 2. Upload photo of the tool's name plate	 STEP 4 Collect and redeem PROMIX points from BeConnected Redemption Centre
--	--	--	--

 **BeConnected**



 FREE DOWNLOAD App Store  FREE DOWNLOAD Google Play

T&C Apply.

For more info, please contact:

Robert Bosch Sdn Bhd 220975-V

Hotline: **1800 880 188** (Mon-Fri 9am-5pm)

 www.bosch-pt.com.my  [Boschpt.my](https://www.facebook.com/Boschpt.my)  [boschptmy](https://www.instagram.com/boschptmy)



BOSCH



MEASURING TOOLS PRODUCT CATALOGUE 2023

Bosch Professional.

UPGRADE YOUR EFFICIENCY.


MeasureOn is your app for easy documentation of floor plans, measurements, photos, and notes. Benefit from a high degree of flexibility and process your data anywhere – on the construction site, at the office, on the move, or at home.

USE THE NEW INFINITE WORKSPACE

Start your project and save all information in one place – the digital workspace. Arrange the collected data according to your personal needs and expand the workspace at any time.

ADD PHOTOS

Take photos with your smart device, then simply insert them into the infinite workspace, and use your laser range finder to add measured values to your photos.

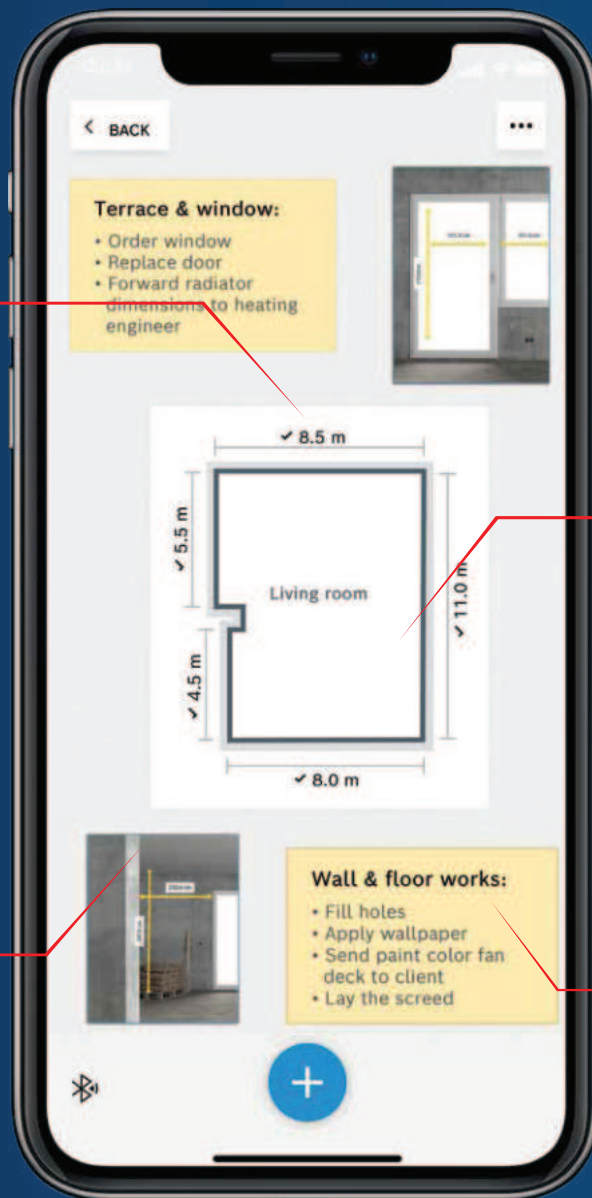

SKETCH FLOOR PLANS

Use your finger to quickly and intuitively sketch floor plans organised by individual rooms. With your laser range finder you can capture measurements instantly and insert them error-free into the app.

ADD NOTES

Say goodbye to scraps of paper: add all your notes to the flexible workspace and access them anywhere at any time.



iOS



Android

BOSCH LEVELLING REMOTE APP – CONTROLLING OF COMBI AND LINE LASERS VIA SMARTPHONE

With the Bosch Professional combi and line lasers, all kinds of levelling tasks can be completed with just one tool. As they are particularly easy to use, you can adjust the laser quickly and easily.

Experience even greater precision when you connect your tools to the Bosch Levelling Remote app via a Bluetooth® connection. This hands-free operation allows you to turn lines on and off, activate receiver mode or put your tool on standby without the slightest wobble of the laser. With the help of the RM 3 Professional motorised multifunctional mount, the laser lines can be adjusted accurate to the nearest millimetre. You can also adjust the visibility of the laser via the app according to the ambient light or remaining battery life.



iOS



Android



BOSCH THERMAL APP – MEASURE TEMPERATURES AND SEND THEM TO YOUR SMARTPHONE

With Bosch Professional infra-red camera for a rapid overview and thermo detector for detail, you can measure and record surface temperatures easily and quickly. Bosch thermo tools provide absolute reliability in areas such as heating, air conditioning and climate technology, plumbing, electrics or in industry.

Measurement and documentation has become simpler thanks to a Wi-Fi module that creates a Wi-Fi hotspot around it. This means you can import your results directly to the Bosch Thermal App and keep working with them there.



iOS



Android






GLM 40 PROFESSIONAL

Simple and Easy with One Push



20 pts
IP 54



Technical Specifications	
Part number	0 601 072 9K0
Laser class	2
Measuring range	0.15 – 40.00 m
Measuring accuracy	± 2.0 mm*
Unit of measurement	m/ft
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	2 x AAA battery

Accessories


- Pouch

GLM 400 PROFESSIONAL

Conversion at One Press



30 pts
IP 54

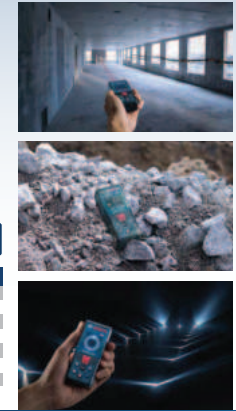


Technical Specifications	
Part number	0 601 072 RK0
Laser class	2
Measuring range	0.05 – 40.00 m
Measuring accuracy	± 1.5 mm*
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR03 (AAA)
Weight	0.1 kg
Scope of delivery	Hand strap, 2 x AAA battery

GLM 50-23 G PROFESSIONAL

2-in-1 Laser Measure with Green Laser for Rough Jobsites



50 pts
IP 54



Technical Specifications	
Part number	0 601 072 VK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	2 x AA battery

Accessories

- Pouch
- 3.7 V Battery
- BT 150

GLM 50-27 CG PROFESSIONAL

Robust and Reliable Laser Measure with Green Laser for Excellent Visibility



50 pts
IP 54



Technical Specifications	
Part number	0 601 072 LK0
Laser class	2
Measuring range	0.05 – 50.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 2 x AA battery

Accessories

- Pouch
- 3.7 V Battery
- BT 150

GLM 100-25 C PROFESSIONAL

Precise Laser Measure for Outdoor Measuring and Documenting



120 pts
IP 54



Technical Specifications	
Part number	0 601 072 YK0
Laser class	2
Measuring range	0.08 – 100.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 3 x AA battery

Accessories

- Pouch

GLM 150 C PROFESSIONAL

Long Range Laser Measure Applicable for All Surroundings with Documentation



150 pts
IP 54



Technical Specifications	
Part number	0 601 072 FK0
Laser class	2
Measuring range	0.08 – 150.00 m
Measuring accuracy	± 1.5 mm*
Measuring range (angle)	0 – 360° (4 x 90°)
Measuring accuracy (angle)	± 0.2°
Unit of measurement	m/cm; ft/inch
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, hand strap, 3 x AA battery

Accessories

- BT 150


LASER MEASURE



INCLINOMETER


GIM 60 L PROFESSIONAL

Laser-accurate Incline Transfer Over Longer Distances

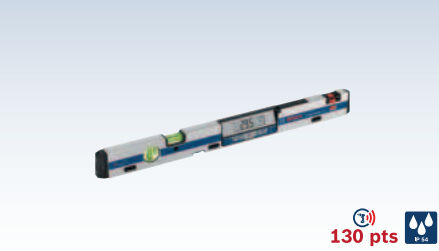


130 pts

Technical Specifications	
Part number	0 601 076 900
Laser class	2
Length	60 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0,05° (0°/90°); ± 0,2° (1°-89°)
Laser range	30 m
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.9 kg
Scope of delivery	Protective bag, 4 x AA battery

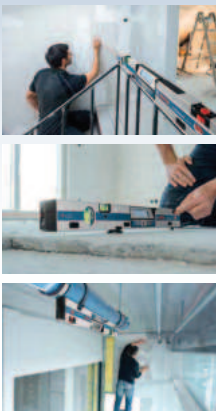


GIM 120 PROFESSIONAL

Longer for Better Precision

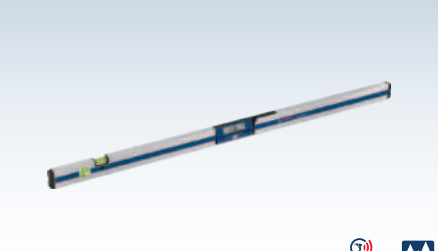

120 pts

Technical Specifications	
Part number	0 601 076 800
Length	120 cm
Measuring range	0 – 360° (4 x 90°)
Measuring accuracy	± 0,05° (0°/90°); ± 0,2° (1°-89°)
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.4 kg
Scope of delivery	Protective bag, 4 x AA battery

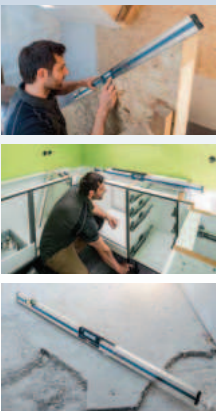

ANGLE MEASURER


GAM 220 PROFESSIONAL

Precise and Easy Angle Measurement



110 pts

Technical Specifications	
Part number	0 601 076 500
Arm length	40 cm
Measuring range	0 – 220°
Measuring accuracy	± 0,1°
Power supply	4 x 1.5 V LR6 (AA)
Weight	1.3 kg
Scope of delivery	Protective bag, 4 x AA battery

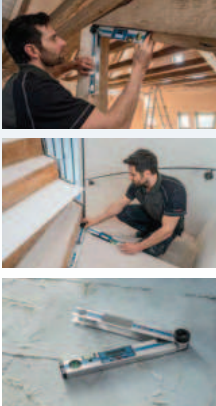

GPL 3 G PROFESSIONAL

Robust and Compact 3-point Laser with Highly Visible Green Laser Points



30 pts

Technical Specifications	
Part number	0 601 066 N00
Laser class	2
Projection	3 points
Working range	up to 30 m
Accuracy	± 0,35 mm/m°; ± 0,7 mm/m° (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery



Accessories
• BT 150

GPL 5 G PROFESSIONAL

Robust and Compact 5-point Laser with Highly Visible Green Laser Points



60 pts

Technical Specifications	
Part number	0 601 066 P00
Laser class	2
Projection	5 points
Working range	up to 30 m
Accuracy	± 0,35 mm/m°; ± 0,7 mm/m° (bottom point)
Self-levelling range	± 4°
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.4 kg
Scope of delivery	Pouch, 2 x AA battery



Accessories
• BT 150



POINT LASER



COMBI LASER

GCL 2-50 CG PROFESSIONAL

Optimum Visibility Connected with Smart Functions



170 pts



Technical Specifications	
Part number	0 601 066 H80
Laser class	2
Projection	2 lines; 2 points
Working range	up to 50 m (line); 10 m (point)
Accuracy	± 0.3 mm/m* (line); ± 0.7 mm/m* (point)
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.6 kg
Scope of delivery	Carrying case, pouch, RM 2, target plate, AA1, 4 x AA battery

Accessories

- LR 7
- Mounting Clamp
- BM 1
- RM 2
- RM 3
- RC 2
- BT 150/BT 150-5/8"
- BT 350
- Laser Glasses Green
- Target Plate
- 12 V Li-Ion
- 10.8 V Li-Ion

GCL 2-15 G PROFESSIONAL

Combi Green Laser Level with Better Visibility



140 pts



Technical Specifications	
Part number	0 601 066 J00
Laser class	2
Projection	2 lines; 2 points
Working range	up to 15 m (line); 10 m (point)
Accuracy	± 0.3 mm/m* (line); ± 0.7 mm/m* (point)
Self-levelling range	± 4°
Power supply	3 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying case, pouch, RM 1, ceiling clamp, target plate, 3 x AA battery

Accessories

- RM 1
- BT 150
- BT 150-5/8"
- Laser Glasses Green



LINE LASER

GLL 3-15 X PROFESSIONAL

3-line Laser with Improved Line Visibility for Increased Work Efficiency



30 pts
IP 54

Technical Specifications	
Part number	0 601 063 M80
Laser class	2
Projection	3 lines; 1 point
Working range	up to 15 m (line); 5 m (point)
Accuracy	± 0.7 mm/m* (point); ± 0.2 mm/m* (horizontal); ± 0.3 mm/m* (vertical)
Self-levelling range	± 3°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying bag, 4 x AA battery

- Accessories**
- BT 150-5/8"
 - Laser Glasses Red



GLL 5-50 X PROFESSIONAL

5-line Laser with Improved Line Visibility for Increased Work Efficiency



40 pts
IP 54

Technical Specifications	
Part number	0 601 063 N81
Laser class	2
Projection	5 lines; 1 point
Working range	up to 50 m (line); 5 m (point)
Accuracy	± 0.2 mm/m* (horizontal); ± 0.7 mm/m* (point); ± 0.3 mm/m* (vertical)
Self-levelling range	± 3°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.5 kg
Scope of delivery	Carrying bag, 4 x AA battery

- Accessories**
- LR 6
 - LR 7
 - Mounting Clamp
 - BT 150-5/8"
 - Laser Glasses Red
 - Target Plate



GLL 3-80 PROFESSIONAL

3 x 360° for Visibility on a New Level



300 pts
IP 54

Technical Specifications	
Part number	0 601 063 S00
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.3 mm/m*
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Carrying case, pouch, target plate, 4 x AA battery

- Accessories**
- LR 6
 - LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - BT 350
 - Laser Glasses Red
 - Target Plate



GLL 3-60 XG PROFESSIONAL

3 x 360° Green Line Laser – All-round Levelling Solution



270 pts
IP 54


Technical Specifications	
Part number	0 601 063 ZK0
Laser class	2
Projection	3 x 360° lines
Working range	up to 60 m (radius)
Accuracy	± 0.3 mm/m*
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA)
Weight	0.8 kg
Scope of delivery	Carrying case, pouch, target plate, 4 x AA battery

- Accessories**
- LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - BT 350
 - Laser Glasses Green
 - Target Plate



GLL 3-80 CG PROFESSIONAL

Green Line Laser with Superior Visibility in 3 x 360° - Simply Connected



350 pts
IP 54

Technical Specifications	
Part number	0 601 063 U80
Laser class	2
Projection	3 x 360° lines
Working range	up to 120 m (radius)
Accuracy	± 0.2 mm/m*
Self-levelling range	± 4°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.9 kg
Scope of delivery	Carrying case, BM 1, ceiling plate, pouch, target plate, AA1, 4 x AA battery

- Accessories**
- LR 7
 - Mounting Clamp
 - BM 1
 - BT 150
 - BT 150-5/8"
 - BT 350
 - Laser Glasses Green
 - Target Plate
 - 12 V Li-Ion
 - 10.8 V Li-Ion



GRL 350 HV PROFESSIONAL

Rotational Laser for Horizontal and Vertical Application with Manual Dual Slope



380 pts
IP 55



Technical Specifications	
Part number	0 601 061 S40
Laser class	3R
Working range	up to 350 m (diameter)
Accuracy	± 0.05 mm/m* (horizontal); ± 0.1 mm/m* (vertical)
Self-levelling range	± 5°
Power supply	2 x 1.5 V LR20 (D)
Weight	1.8 kg
Scope of delivery	Carrying case, LR 30, RB 30, WM 24, target plate, laser viewing glasses, 2 x D battery, 1 x 9V battery

Accessories

- WM 4
- WM 24
- RC 4
- BT 160
- BT 170 HD
- Laser Glasses Red
- Target Plate
- GR 240
- GR 500

ROTATION LASER

GOL 26 D PROFESSIONAL

Robust and Reliable – Ideal for Long Distances



120 pts
IP 54



Technical Specifications	
Part number	0 601 068 000
Magnification	26 x
Working range	100 m
Accuracy	± 1.6 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob

Accessories

- BT 160
- BT 170 HD
- GR 240
- GR 500

OPTICAL LEVEL

GOL 32 D PROFESSIONAL

Robust Solution for Precise Levelling at Long Distances



140 pts
IP 54



Technical Specifications	
Part number	0 601 068 500
Magnification	32 x
Working range	120 m
Accuracy	± 1.0 mm at 30 m
Weight	1.5 kg
Scope of delivery	Carrying case, adjusting pin, hex key, lens cover, plumb bob

Accessories

- BT 160
- BT 170 HD
- GR 240
- GR 500



THERMO DETECTOR

GIS 500 PROFESSIONAL

Press and Go - Temperature on Hand



20 pts

Technical Specifications	
Part number	0 601 083 480
Laser class	2
Measuring range	-30 °C – +500 °C
Measuring accuracy	± 1.8 °C* (0 to 100 °C)
Power supply	2 x 1.5 V LR6 (AA)
Weight	0.2 kg
Scope of delivery	Pouch, 2 x AA battery




GIS 1000 C PROFESSIONAL

All-round Thermo Detector for Precise and Versatile Measurements



180 pts

Technical Specifications	
Part number	0 601 083 3K1
Laser class	2
Measuring range	-40 °C – +1000 °C
Measuring accuracy	± 1.0 °C* (0 to 100 °C)
Measuring accuracy (relative humidity)	± 2 %
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.6 kg
Scope of delivery	Carrying bag, AA 1, micro-USB cable, 4 x AA battery

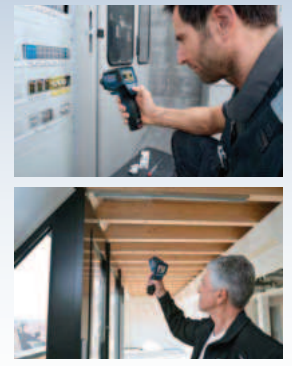

- Accessories**
- AA 1
 - 12 V Li-Ion
 - 10.8 V Li-Ion


GTC 400 C PROFESSIONAL

Detailed Visualization of Temperature Differences



750 pts

Technical Specifications	
Part number	0 601 083 150
Measuring range	-10 °C – +400 °C
Measuring accuracy	± 3.0 °C* (0 to 100 °C)
No. of measuring points	19,200
Field of view (FOV)	53 x 43°
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0.5 kg
Scope of delivery	Carrying bag, AA 1, hand strap, micro-USB cable, 4 x AA battery

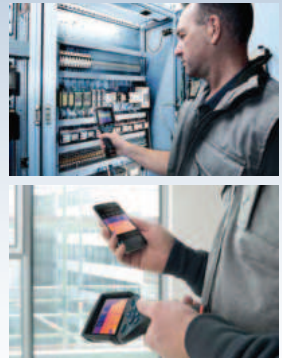

- Accessories**
- AA 1
 - 12 V Li-Ion
 - 10.8 V Li-Ion



WALLSCANNER

GMS 120 PROFESSIONAL


Simple and Intuitive – Logical Favourite for Locating Objects Effectively



3 120 pts

Technical Specifications	
Part number	0 601 081 000
Max. detection depth	120 mm
Detection materials	metal, live cable, stud
Power supply	1 x 9 V 6LR61
Weight	0,3 kg
Scope of delivery	Pouch, hand strap, 1 x 9V battery

46

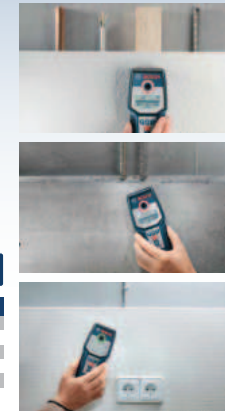

D-Tect 120 PROFESSIONAL

Spot On All Common Objects



3 120 pts

Technical Specifications	
Part number	0 601 081 3K0
Max. detection depth	120 mm
Detection materials	metal, cable, water-filled plastic pipe, stud
Power supply	4 x 1.5 V LR6 (AA) / 12 V Li-Ion / 10.8 V Li-Ion
Weight	0,5 kg
Scope of delivery	Carrying bag, AA 1, 4 x AA battery



Accessories

- AA 1
- 12 V Li-Ion
- 10.8 V Li-Ion

D-Tect 150 SV PROFESSIONAL

Spot On All Common Objects









3 360 pts

Technical Specifications	
Part number	0 601 010 008
Max. detection depth	150 mm
Detection materials	Plastic pipes, cable of all kinds, ferrous/non-ferrous, metal, wood, cavities
Power supply	4 x 1.5 V LR6 (AA)
Weight	0,7 kg



ACCESSORIES PAGE

Laser Receiver / Remote Control	Part number	Working range	Accuracy	Power supply	Weight	Suitable for	
	LR 5	0 601 069 700	0 – 40 m	± 1 mm	1 x 9 V 6LR61	0.1 kg	GLL 5-40 E, GLL 8-40 E
	LR 6	0 601 069 G80	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR03 (AAA)	0.1 kg	GLL 5-50 X, GLL 3-80
	LR 7	0 601 069 H00	5 – 50 m	± 1 mm / ± 3 mm (fine / rough)	2 x 1.5 V LR6 (AA)	0.2 kg	GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GCL 2-50 CG
	LR 45	0 601 069 L00	up to 300 m	±1mm/±2mm/ ±3mm/±5mm/ ±7mm/±10mm	2 x 1.5 V LR6 (AA)	0.3 kg	GRL 300 HVG, GRL 350 HV, GRL 400 H
	Receiver Mounting Bracket	1 608 M00 70F	nil.	nil.	nil.	0.1 kg	LR 1, LR 1 G
	Receiver Mounting Bracket	1 608 M00 C1L	nil.	nil.	nil.	0.1 kg	LR 6, LR 7
	RC 2	0 601 069 C00	up to 20 m	nil.	1 x 1.5 V LR6 (AA)	0.1 kg	RM 3
	RM 3	0 601 092 800	nil.	nil.	nil.	0.5 kg	GCL 2-50 CG
	BM 1	0 601 015 A01	nil.	nil.	nil.	0.5 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG
	BA 3.7V 1.0 Ah	1 608 M00 C5D	nil.	nil.	nil.	0.1 kg	GLM 50-23 G, GLM 50-27 CG
	AA 1 Battery Adaptator	1 608 M00 C18	nil.	nil.	nil.	0.1 kg	GCL 2-50 CG, GLL 3-80 CG, GIS 1000 C, GTC 400 C, D-tect 120, D-tect 200 C, GIC 120 C

Tripod		Part number	Working range	Tripod thread	Section	Weight	Suitable for
	BT 150	0 601 096 B00	55 – 157 cm	1/4"	nil.	1.3 kg	GLM 400, GLM 500, GLM 50-23 G, GLM 50-27 CG, GLM 100-25 C, GLM 150-27 C, GLM 150 C, GPL 3 G, GPL 5 G, GCL 2-15 G, GCL 2-50 CG, GLL 1 P, GLL 30 G, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 150-5/8"	0 601 096 C80	55 – 157 cm	5/8"	nil.	1.1 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-15 X, GLL 5-50 X, GLL 5-40 E, GLL 8-40 E, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG
	BT 160	0 601 091 200	97 – 160 cm	5/8"	nil.	4.1 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 170 HD	0 601 091 300	107 – 165 cm	5/8"	nil.	5.5 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 300 HD	0 601 091 A00	122 – 295 cm	5/8"	nil.	7.2 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	BT 350	0 601 015 B00	140 – 350 cm	nil.	3	2.5 kg	GCL 2-15 G, GCL 2-50 CG, GLL 3-60 XG, GLL 3-80 , GLL 3-80 CG
	GR 240	0 601 094 100	2.4 m	nil.	2	1.4 kg	GOL 26 D, GOL 32 D, GCL 2-50 CG, GLL 5-50 X, GLL 3-60 XG, GLL 3-80, GLL 3-80 CG, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV
	GR 500	0 601 094 300	5.0 m	nil.	5	2.0 kg	GOL 26 D, GOL 32 D, GRL 300 HVG, GRL 350 HV, GRL 400 H, GRL 600 CHV



BOSCH

Home & Garden





Easy Aquatak 100 (0 600 800 ELO)

Easy Aquatak 110 (0 600 8A7 FLO)

Universal Aquatak 125 (0 600 8A7 ALO)

Pressure (bar)	100	110	125
Flow Rate (l/h)	300	330	360
Motor Power (W)	1,100	1,300	1,500
Max. Pressure (bar)	100	110	125
Max. Temp (°C)	40	40	40
Voltage (V)	220 / 240	220 / 240	220 / 240
Frequency (Hz)	50 / 60	50 / 60	50 / 60
Weight (Kg)	3.0	3.8	6.8
Hose (m)	3	3	5
Self-priming Capable	Yes	Yes	Yes
Accessories Inside Package	<ul style="list-style-type: none"> - Bosch 360 Gun - High Pressure Detergent Nozzle (350ml) - 3m Hose 	<ul style="list-style-type: none"> - Rotary nozzle - Variable nozzle - High Pressure Detergent Nozzle (450ml) - Water Filter - High Pressure Gun - Lance - High Pressure Hose 3m 	<ul style="list-style-type: none"> - Trio nozzle - Clear New Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 5m



VERSAL

ADVANCED (Induction motor)



Universal Aquatak 130 (0 600 8A7 BL0)	Advanced Aquatak 140 (0 600 8A7 DL0)	Advanced Aquatak 150 (0 600 8A7 7L0)
130	140	150
380	450	500
1,700	2,100	2,200
130	140	150
40	40	40
220 / 240	220 / 240	220 / 240
50 / 60	50 / 60	50 / 60
7.8	17.6	22.5
6	8	8
Yes	Yes	Yes
<ul style="list-style-type: none"> - Trio nozzle - Rotary nozzle - Water Filter - High Pressure Detergent Nozzle (450ml) - Bosch Gun - Standard Lance - High Pressure Hose 6m Length 	<ul style="list-style-type: none"> - High Pressure Detergent Nozzle (550ml) - Water Filter - Bosch Gun - Variable Fan Jet - Rotatory Nozzle - Standard Lance - 8m PU High Pressure Hose 	<ul style="list-style-type: none"> - High Pressure Detergent Nozzle (550ml) - 60 ° Fixed Fan Jet nozzle - Variable Fan Jet Lance - Standard Lance - Hose 8m (Steel armed) - Cable 5m - Bosch Gun - High Pressure Hose Reel - Roto Lance



Accessories Kit For BOSCH Easy & Universal Aquatak

Universal x Home & Car Kit (F 016 800 611)

The Car & Home Bundle for your patio and car cleaning



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

90° nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Patio Cleaner

Comfortable and efficient patio cleaning, ideal for larger Patio areas for quicker less time consuming cleaning.

*Not applicable for 360 degree gun (F016 800 536)

Universal x 360° Cleaning Kit (F 016 800 612)

The 360° Bundle for all cleaning needs



Scope of supply



Inside the Box

Usage

Extention hose

Allows wider reach around your home or distance from water / electricity source

Microfibre cloth

For the finishing touch i.e. Polishing car

360° Gun

Ideal for all other task around your home and for your Cars & Bikes, rotating nozzle reaches difficult areas & one handed operation offers more stability with smaller/lighter items i.e wheely bins, garden furniture etc.

Universal x Car Cleaning Kit (F 016 800 572)

The Car Bundle for your car cleaning needs



Scope of supply



Inside the Box

Usage

Wash brush

Agitates tougher dirt, soft bristles suitable even for delicate surfaces i.e. Windows & Cars

Extention hose

Allows wider reach around your home or distance from water / electricity source

90 degree nozzle

Great for cleaning wheel arches and hard to reach areas i.e. Gutters

Microfibre cloth

For the finishing touch i.e. Polishing car

*Not applicable for 360 degree gun (F016 800 536)

High Pressure Cleaner Accessories

Rotary Nozzle
(F 016 800 580)



- Aquatak 110, 120, 125, 130 and AQT 42-13



90° Nozzle
(F 016 800 581)



- Aquatak 110, 120, 125, 130, AQT 42-13 and 45-14 X



Trio Nozzle
(F 016 800 583)



- Aquatak 110, 120, 125, 130 and AQT 42-13



Vario Fan Jet Nozzle
(F 016 800 582)



- Aquatak 110, 120, 125, 130 and AQT 42-13



450ml Detergent Nozzle
(F 016 800 509)



- All AQT range



Bosch 360° Gun
(F 016 800 536)



- Aquatak 100, 110, 120, 125, 130



AquaSurf 250 Patio Cleaner
(F 016 800 486)



- Aquatak 110, 120, 125, 130



Suction Nozzle
(F 016 800 356)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Wash Brush
(F 016 800 359)



- Aquatak 110, 120, 125, 130, AQT 42-13 45-14 X and 150



Water Filter
(F 016 800 577)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Self-Priming Kit (with Filter)
(F 016 800 421)




- All AQT range



Drain Pipe Cleaner 10 m
(F 016 800 362)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13

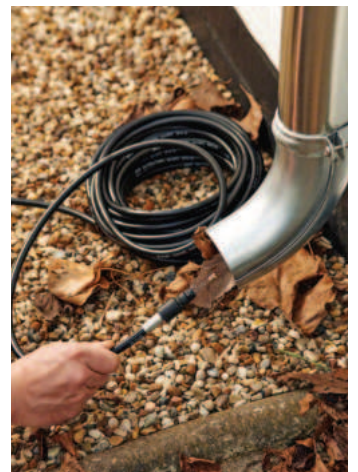

High Pressure Hose 6 m
(F 016 800 360)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Extension Hose 6 m
(F 016 800 361)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Adaptor for Karcher Accessories
(F 016 800 575)



- Aquatak 100, 110, 120, 125, 130 and AQT 42-13



Grass Shear

Easy Shear
(0 600 833 300)



Capacity	
Battery Type	: Lithium-ion
Battery Voltage	: 3.6 V
Works with battery capacity	: 1.5 Ah
No-load runtime	: Up to 40 mins
Battery charge time	: 3 h
Shrub blade length (cm)	: 12 cm
Grass shear width (cm)	: 8 cm
Tooth spacing	: 8 mm
Area cut per battery charge, max	: 22 m ²
Weight (g)	: 530g



Lawn Mower

AHM 38 G
(0 600 886 103)



Capacity	
Min Cutting Height	: 15 mm
Cutting Height	: 15 - 43 mm
Cutting Width	: 38 cm
Blade	: 5 Bladed Cylinder
Roller	: Yes
Self Propelling	: No
Fuel Type	: Hand Push
Product Dimensions	
(L x W x H)	: 540 x 490 x 380mm
Grass Box Capacity	: 25 Litres
Grass Box P/N	: 0 600 886 160
Weight	: 7.5 kg



Grass Collection Box
(0 600 886 160)

Grass Trimmer

Easy GrassCut 23
(0 600 8C1 H71)



Capacity	
Motor Power	: 280 W
Cutting Size	: 23 cm
Cutting System	: Semi-auto Spool
Cutting Speed	: 12.500 rpm
Spool	: 1.6 mm x 4 m
Spool P/N	: F016800569
Weight	: 2.0 kg
Tool Dimensions	
(L x W x H)	: 790 x 263 x 902mm
Weight Packed	: 2.6 kg



Cutting Spool
(F 016 800 569)

Lawn Mower

Rotak 32-12 (Corded)
(0 600 8A6 078)



Capacity	
Motor	: Powerdrive
Motor Power	: 1.200 W
Torque	: 13 Nm
Cutting Height	: 20 - 60 mm; 3-fold
Grass Combs	: Yes
Grass Box Capacity	: 31 L
Handle Type	: Standard
Integrated carrying handles	: No
Cutting System	: Rotary Blade
Power Cable	: 10m
Blade Width	: 32 cm
Blade P/N	: F 016 800 340
Weight	: 6.8 kg



Replacement Blade for Rotak 32-12
(F 016 800 340)

Workbench

PWB 600
0 603 B00 200



Capacity	
Weight	: 11.6 kg
Load Bearing capacity, max.	: 200 kg
Height of Work bench	: 834 mm
Width of Work bench	: 680 mm
Length of Work bench	: 680 mm



Easy Prune
0 600 8B2 140



Capacity	
Battery Voltage	: 3.6 V
Battery Charge Time	: 3.5 h
Cuts per Battery charge up to	: 450
Weight	: 0.49 kg
Battery Type	: Lithium-Ion
Tool Dimension (length)	: 250 mm
Tool Dimension (height)	: 85 mm
Cutting Capacity up to	: 25 mm
Tool Dimensions (width)	: 31 mm
Cutting System	: Bypass



Air Pump

Air pump
0 603 947 080



Capacity	
Tool Diemions (length)	: 49.2 mm
Weight	: 0.43 kg
Max. Output volume	: 10 l/min
Max. Ah	: 3 Ah
Hose Length	: 0.24 m
Max. Pressure	: 10.3 bar
Battery Voltage	: 3.6 V
Tool Dimensions (width)	: 215 mm
Max. Pressure	: 1030 kPa
Tool Diemions (height)	: 106 mm
Max. Pressure	: 150 psi




Brush

Power Scrubber Universal Brush
0 603 3E0 050



Capacity	
Tool Dimensions (length)	: 140 mm
Weight	: 0,33 kg
No-load Speed	: 215 rpm
Battery Voltage	: 3,6 V
Tool Dimensions (width)	: 45 mm
Tool Dimensions (height)	: 100 mm
IP protection type	: IPX5
Battery Capacity	: 2 Ah

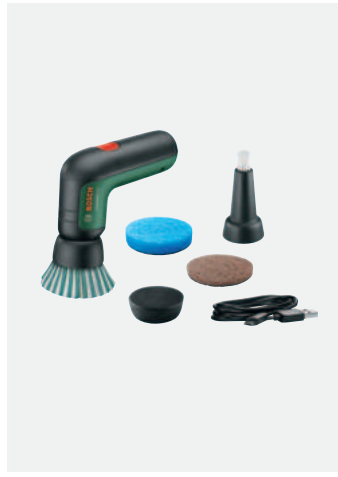

Green kitchen scour pad X3
1 600 A02 3L0



Bristle brush
1 600 A02 3KW



Brown heavy duty pad X3
1 600 A02 3L1



Brush pad holder
1 600 A02 3KX




White melamine eraser X3
1 600 A02 3L2



Brush detailed brush
1 600 A02 3KY



Microfibre non-scratch pad X3
1 600 A02 3KZ

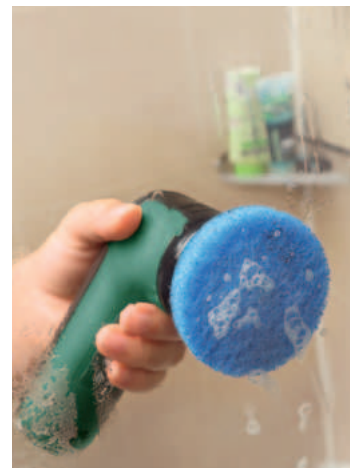



Warranty

This serves to inform you that **all Bosch Power Tools are guaranteed against manufacturing defects for a period of 12 months** from the registered date of purchase (**Bosch Measuring Tools, GHP Range High Pressure Washer, HEAVY DUTY Range Power Tools, Bosch Range Power Tools, Bosch Hot Air Gun, Bosch Batteries and Bosch Charger are entitled to 12 months warranty. Bosch Aquatak High Pressure washer and Garden Tools are entitled to 6 months warranty. Term and Conditions apply**). For the same defect repair within warranty period, a maximum 3 times warranty repair are allowed for Bosch Power Tools, 2 times for Bosch Measuring Tools and Bosch Home & Garden Tools. This guarantee, however, does not cover damage caused by accident, misuse, unauthorized repairs, tampering, normal wear & tear, additions and modifications made to the tool in any manner. In case of complaint, please send the tool, undismantled together with official proof of purchase, i.e. tax invoice or receipt stated with tool's serial no., to Bosch Power Tools Authorised Service Centre.





































Jaminan

Dimaklumkan bahawa tempoh jaminan untuk **Alat-alat kuasa Bosch akibat kecacatan product semasa pengilangan adalah terhad kepada 12 bulan sahaja** bermula dari tarikh pembelian (**Alat Pengukur Bosch, Siri Pencuci Tekanan Tinggi GHP Bosch, Siri HEAVY DUTY Alat-alat Kuasa Bosch, Alat-alat Kuasa Bosch Range, Alat Pengering Bosch, Bateri Bosch dan Pengecas Bateri Bosch Produk tempoh jaminannya 12 bulan. Pembersih tekanan tinggi dan Alat Kebun Tempoh Jaminannya 6 bulan. Tertakluk kepada Terma and Syarat**). Jumlah maksimum pembaikan dalam tempoh jaminan adalah terhad kepada 3 kali sahaja untuk Alat-alat kuasa Bosch, 2 kali sahaja untuk Alat-alat Pengukur Bosch dan Alat-alat Kuasa Halaman Bosch. Tempoh jaminan ini tidak termasuk kerosakan akibat kemalangan, penyalahgunaan, membaikpulih yang tidak diakui, haus yang sepatut ada dan pengubahsuaian yang mengakibatkan kerosakan Alat-alat kuasa tersebut. Bagi sebarang pengaduan, sila hantar Alat-alat Kuasa dan tax inouis rasmi atay resit rasmi sebagai bukti pembelian yang dilengkapi dengan nombor siri Alat-alat Kuasa ke Pusat Servis Alat-alat Kuasa Bosch Yang Sah.

保证

谨此通知，有关**所有博世电动工具享有为期12个月之生产损坏保证**，有效期由购买登记日算起（**博世测量仪器，博世GHP 高压清洗机系列，博世 HEAVY DUTY系列产品，博世系列电动工具，博世热风机，博世电池及博世充电器享有12个月保证。高压清洗机和园林工具享有6个月保证。须符合条规**）。在维修保证期间，博世电动工具享有高达三次维修服务，而博世测量仪器及博世家园电动工具则享有两次维修服务。上述保证并不包括有关电动工具因意外、错误使用、非授权维修、正常的磨损、附加及交换或其他方式所造成的损坏及故障。若有任何投诉，请将阁下完整的电功工具和购买税务发票或付款收据及具备电功工具编号交到您的博世电动工具授权维修中心。

Key To Symbols

 Electronic Control	 Rotation Stop	 Constant Electronic	 Forward / Reverse Rotation	 Overload Clutch	 Slim Grip	 Inox For a perfect finish on stainless steel
 Spindle Lock	 Saw Blade Pendulum Action	 Dust Extraction	 Bosch SDS System	 SDS-Plus Tool Holder	 Fine Depth Adjustment	 Distortion-resistant protective guard
 SDS-Max Tool Holder	 SDS-Plus Quick Exchange System	 Bosch SDS SDS-Click Quick Clamping System	 Velcro Fastening	 Easy Fit	 Kick Back Stop	 Turbo Blower
 Removable Cable	 Torque Control	 Restart Protection	 Direct Cooling and Additional Air Inlets	 Brushless EC Motor	 Restart Protection	 Intelligent Brake System
 Drop Control	 Vibration Control	 Auto-Lock	 Woodrazor	 Turbo Power	 Laser Class 2	 Laser Class 3R
						 X LOCK

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.



Authorised Service Centres



Visit our nearest Authorised Service Centre to service your Bosch Power Tools and to purchase tools spare parts.

Robert Bosch Sdn Bhd (220975-V)

No. 8A, Jalan 13/6, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia.

Tel: +603 - 7966 3000 Fax: +603 - 7958 3838

www.bosch-pt.com.my

 Bosch Service Concept Stores

While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy. The Company reserves the right to alter or modify the information contained herein at any time in light of technical or other developments. Technical specification are valid under normal operating condition only. The company does not accept any responsibility for any misuse of the product and cannot be held liable for consequential damage.

For further enquiries, please contact



Bosch Professional Power Tools and Accessories



Boschptmy



1 800 880 188

Mon - Fri 9am - 6pm