

Material number	0 611 913 080
EAN	4059952568577
1 x Bluetooth Low Energy module GCY 42 Professional 1 600 A01 L2W	✓
Auxiliary handle 1 607 031 2E7	✓
Carrying case spare part number 1 605 438 1G1	✓
Grease tube spare part number 1 615 430 010	✓
Machine cloth	✓
Machine cloth spare part number 1 619 200 413	✓



Technical data

Technical data


Impact energy (according to EPTA 05/2016)	12.5 J
Impact rate at rated speed	0 – 2,760 bpm
Rated speed	0 – 305 rpm
Weight excl. battery	8 kg
Tool holder	SDS max
Tool dimensions (width)	132 mm
Tool dimensions (length)	545 mm
Tool dimensions (height)	264 mm
Battery capacity	12,0 Ah
Battery voltage	18.0 V
Weight incl. battery	9,3 kg
Product category subdivision	Cordless Rotary Hammer BITURBO with SDS max

Drilling range

Hammer drilling diameter range in concrete	12 – 45 mm
Recommended drilling diameter range in concrete	20 – 40 mm

Noise/vibration information

Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 94 dB(A); Sound power level 105 dB(A). Uncertainty K= 3 dB.
-------------	---

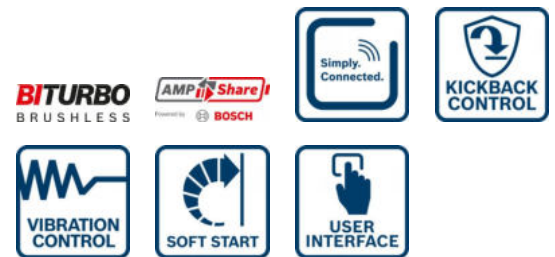

Sales information

Positioning

- Cordless freedom with corded performance – the heavy duty all-rounder for concrete drilling and chiselling

User benefit

- Cordless freedom with corded performance thanks to BITURBO Brushless technology
- Up to 700 g less weight than comparable corded products thanks to a highly optimized drive train
- KickBack Control for reduced hazard of sudden tool reactions and Soft Start EPC & ASC for a comfortable and precise work process

